
STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5 135.7
GIMHAE TWR 118.1 118.45

Note : Departure under ICAO Flight Procedures.

BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
KALOD 1S PSN 1S
MASTA 1S TOPAX 1S
BESNA 1S ENGOT 1S

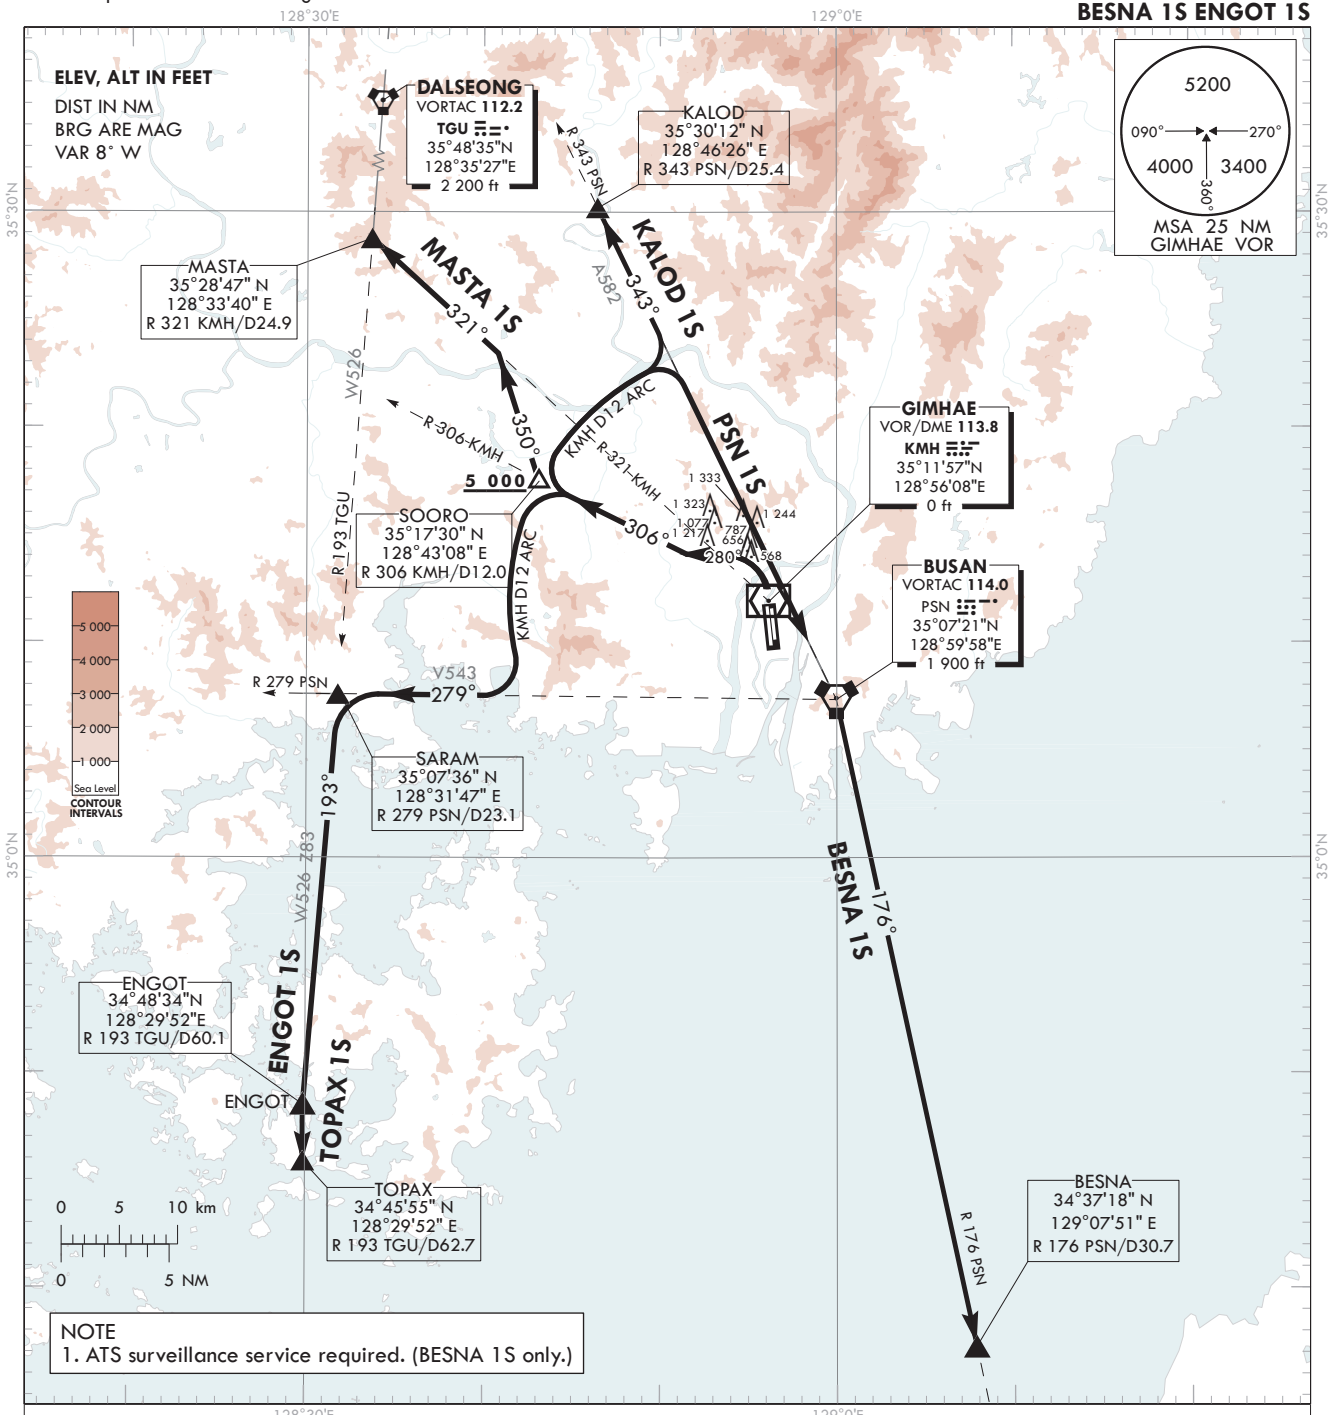

GENERAL INFORMATION

1. Minimum 8.2% CG is required until 5 000 ft due airspace restrictions only.
2. All ACFT departing must complete turn within 2 NM from DER after take-off and First turn is limited to maximum of 230 kt IAS and turning Bank angle based on 25°.
3. Cross SOORO at or above 5 000 ft and climb assigned altitude by ATC.
4. ATS surveillance service required.(BESNA 1S only.)
5. If unable to comply with flight restrictions, advise ATC for alternative.

KALOD ONE SIERRA DEPARTURE

Climbing left turn as soon as practicable HDG 280° to intercept R 306 KMH and cross SOORO, then right turn and proceed via KMH D12 arc to R 343 PSN, then via R 343 PSN to KALOD.

BUSAN ONE SIERRA DEPARTURE

Climbing left turn as soon as practicable HDG 280° to intercept R 306 KMH and cross SOORO, then right turn and proceed via KMH D12 arc to R 343 PSN to PSN.

MASTA ONE SIERRA DEPARTURE

Climbing left turn as soon as practicable HDG 280° to intercept R 306 KMH and cross SOORO, then right turn HDG 350° to R 321 KMH, then R321 KMH to MASTA.

TOPAX ONE SIERRA DEPARTURE

Climbing left turn as soon as practicable HDG 280° to intercept R 306 KMH and cross SOORO, then left turn and proceed via KMH D 12 arc to R 279 PSN, then via R 279 PSN to SARAM, then left turn via R 193 TGU to TOPAX.

BESNA ONE SIERRA DEPARTURE (RNAV 2 Required)

Climbing left turn as soon as practicable HDG 280° to intercept R 306 KMH and cross SOORO, then right turn and proceed via KMH D 12 arc to R 343 PSN, then via R 343 PSN to PSN, then via R 176 PSN to BESNA.

ENGOT ONE SIERRA DEPARTURE (RNAV 2 Required)

Climbing left turn as soon as practicable HDG 280° to intercept R 306 KMH and cross SOORO, then left turn and proceed via KMH D12 arc to R 279 PSN, then via R 279 PSN to SARAM, then left turn via R 193 TGU to ENGOT.

Change : Information of standard instrument departure procedure for RWY 36L/R.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE	DEP 125.5	135.7
GIMHAE	TWR 118.1	118.45

Note : Departure under ICAO Flight Procedures.

BUSAN/Gimhae Intl(RKPK)
RWY 18L/R
KALEK 1B INVOK 1B
APELA 1B PSN 1B
TOPAX 1B ENGOT 1B BESNA 1B

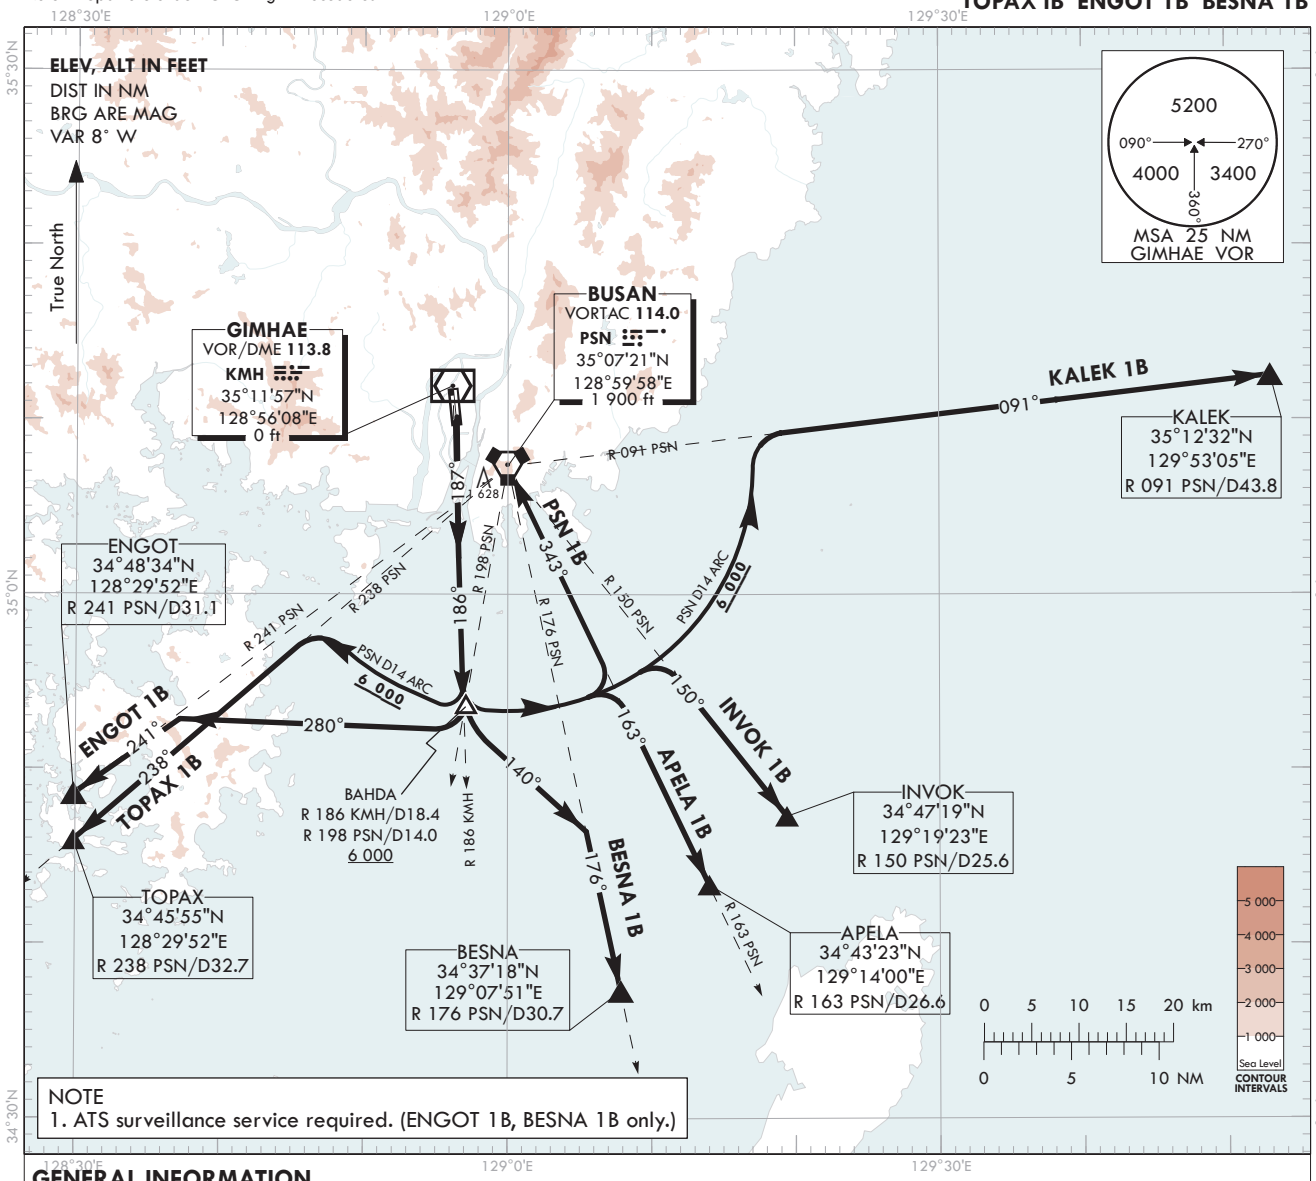

GENERAL INFORMATION

1. Minimum 6.1% CG is required until 6 000 ft due airspace restrictions only.
2. Cross BAHDA at or above 6 000 ft and climb assigned altitude by ATC.
3. ATS surveillance service required.(ENGOT 1B, BESNA 1B only.)
4. If unable to comply with flight restrictions, advise ATC for alternative.

KALEK ONE BRAVO DEPARTURE (RNAV 2 Required)

Climb on HDG 187° to intercept R 186 KMH and proceed to BAHDA, then Left turn and proceed via the PSN D14 arc to intercept R 091 PSN and proceed to KALEK.

INVOK ONE BRAVO DEPARTURE

Climb on HDG 187° to intercept R 186 KMH and proceed to BAHDA, then Left turn and proceed via the PSN D14 arc to intercept R 150 PSN and proceed to INVOK.

APELA ONE BRAVO DEPARTURE

Climb on HDG 187° to intercept R 186 KMH and proceed to BAHDA, then Left turn and proceed via the PSN D14 arc to intercept R 163 PSN and proceed to APELA.

BUSAN ONE BRAVO DEPARTURE

Climb on HDG 187° to intercept R 186 KMH and proceed to BAHDA, then Left turn and proceed via the PSN D14 arc to intercept R 163 PSN and proceed to PSN.

TOPAX ONE BRAVO DEPARTURE

Climb on HDG 187° to intercept R 186 KMH and proceed to BAHDA, then Right turn and proceed via the PSN D14 arc to intercept R 238 PSN and proceed to TOPAX.

ENGOT ONE BRAVO DEPARTURE (RNAV 2 Required)

Climb on HDG 187° to intercept R 186 KMH and proceed to BAHDA, Right turn heading 280° to intercept R 241 PSN and proceed to ENGOT.

BESNA ONE BRAVO DEPARTURE (RNAV 2 Required)

Climb on HDG 187° to intercept R 186 KMH and proceed to BAHDA, Left turn heading 140° to intercept R 176 PSN and proceed to BESNA.

Change : Information of standard instrument departure procedure for RWY 18L/R.

INTENTIONALLY

LEFT

BLANK

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO


TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5 135.7
GIMHAE TWR 118.1 118.45

BUSAN/Gimhae Intl(RKPK)

RWY 18L/R RADAR 1S
RWY 36L/R RADAR 1N

Note : Departure under ICAO Flight Procedures.

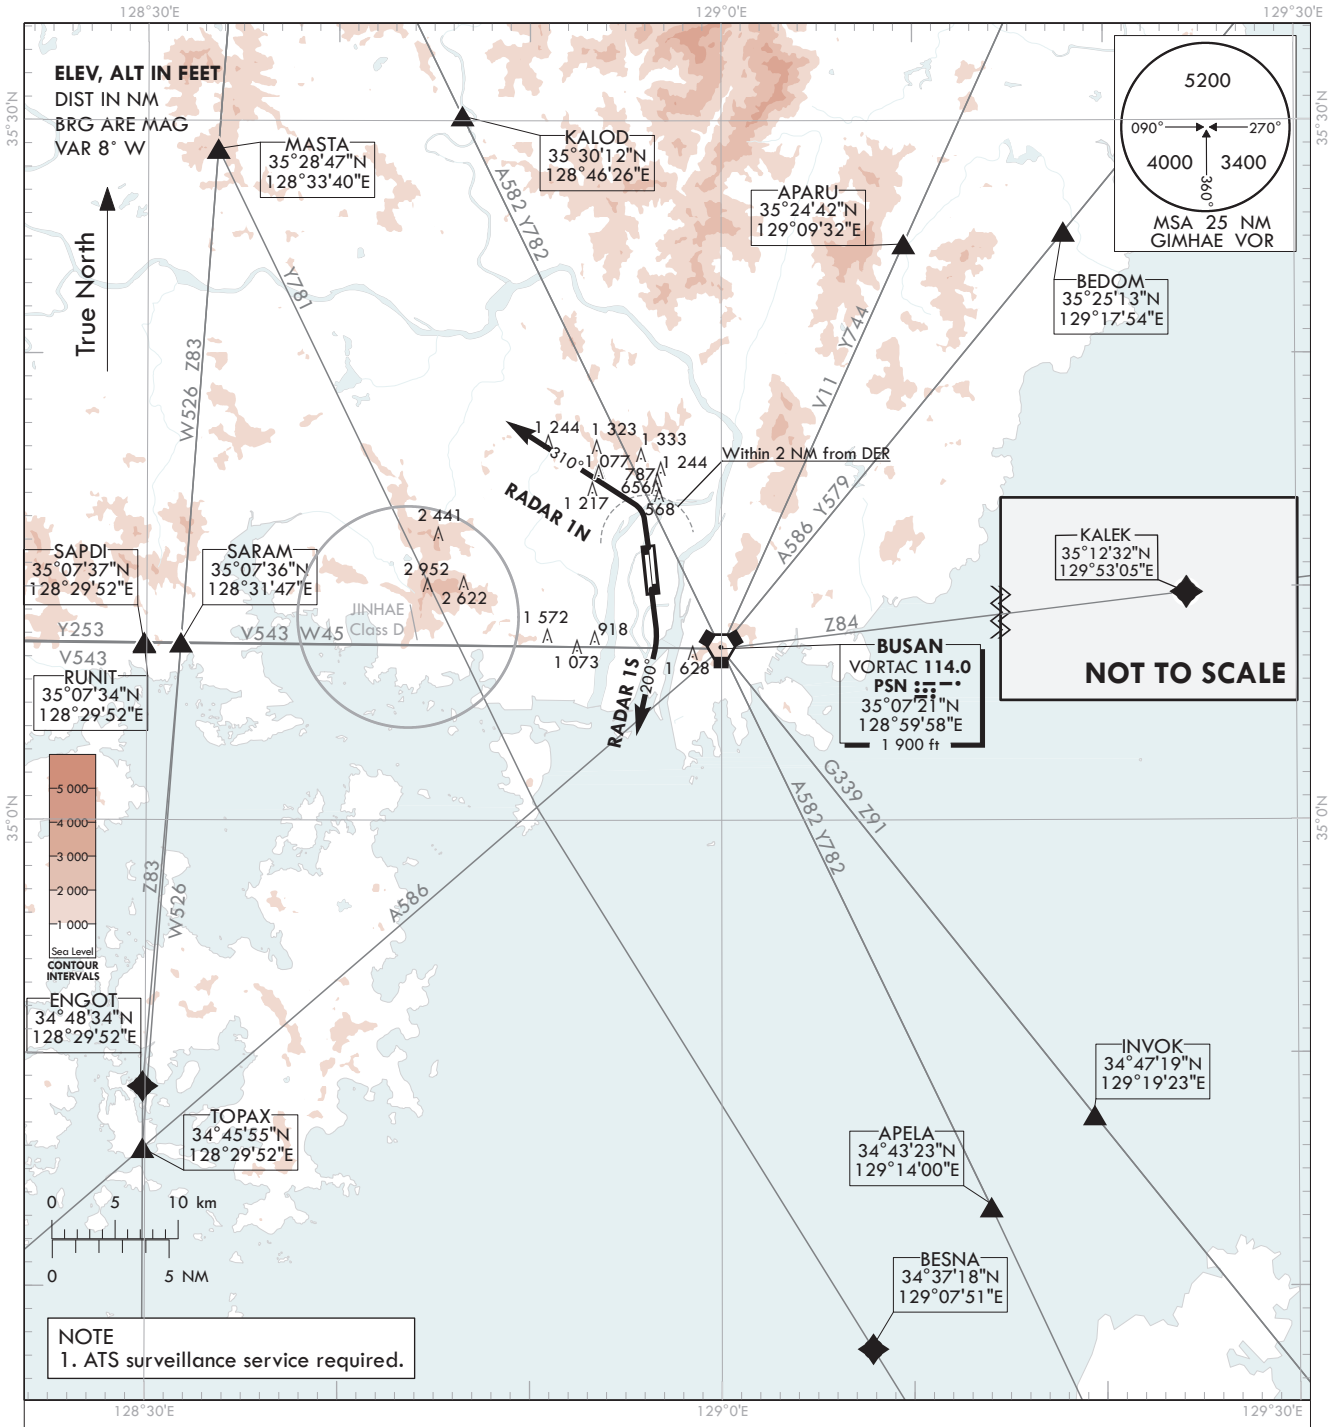

RADAR ONE SIERRA DEPARTURE

TAKE-OFF RWY 18L/R : Climb right turn HDG 200°, then expect radar vectors to intercept filed enroute fix or navaid. Maintain 5 000 ft or assigned altitude/flight level. Expect filed altitude/flight level 10 minutes after departure.
* Minimum 5.9% CG is required until 5 000 ft due airspace restrictions only.
* If unable to comply with flight restrictions, advise ATC for alternative.

RADAR ONE NOVEMBER DEPARTURE

TAKE OFF RWY 36L/R : Climb left turn HDG 310°, then expect radar vectors to intercept filed enroute fix or navaid. Maintain 5 000 ft or assigned altitude/flight level. Expect filed altitude/flight level 10 minutes after departure.
* Minimum 8.2% CG is required until 5 000 ft due airspace restrictions only.
* All aircraft departing must complete turn within 2 NM from DER RWY 36L/R after take-off and First turn is limited to maximum of 230 kt IAS and turning Bank angle based on 25°.
* If unable to comply with flight restrictions, advise ATC for alternative.

LOST COMMUNICATIONS PROCEDURE

If radio contact is not established with departure control prior to reaching 5 000 ft, Continue climb to 8 000 ft before turning to filed fix/Navaid and proceed filed route and altitude.

Change : Amended phrases.

INTENTIONALLY

LEFT

BLANK