

**STANDARD DEPARTURE
CHART INSTRUMENT(SID) - ICAO**


TRANSITION ALT 14 000
TRANSITION LVL FL 140

GANGNEUNG DEP 124.6
YANGYANG TWR 118.85
124.375

YANGYANG/Intl(RKNY)

RWY 15
RNAV KAE 2E
RNAV BIKSI 2E
RNAV PILIT 2E

Note : Departure under ICAO Flight Procedures.

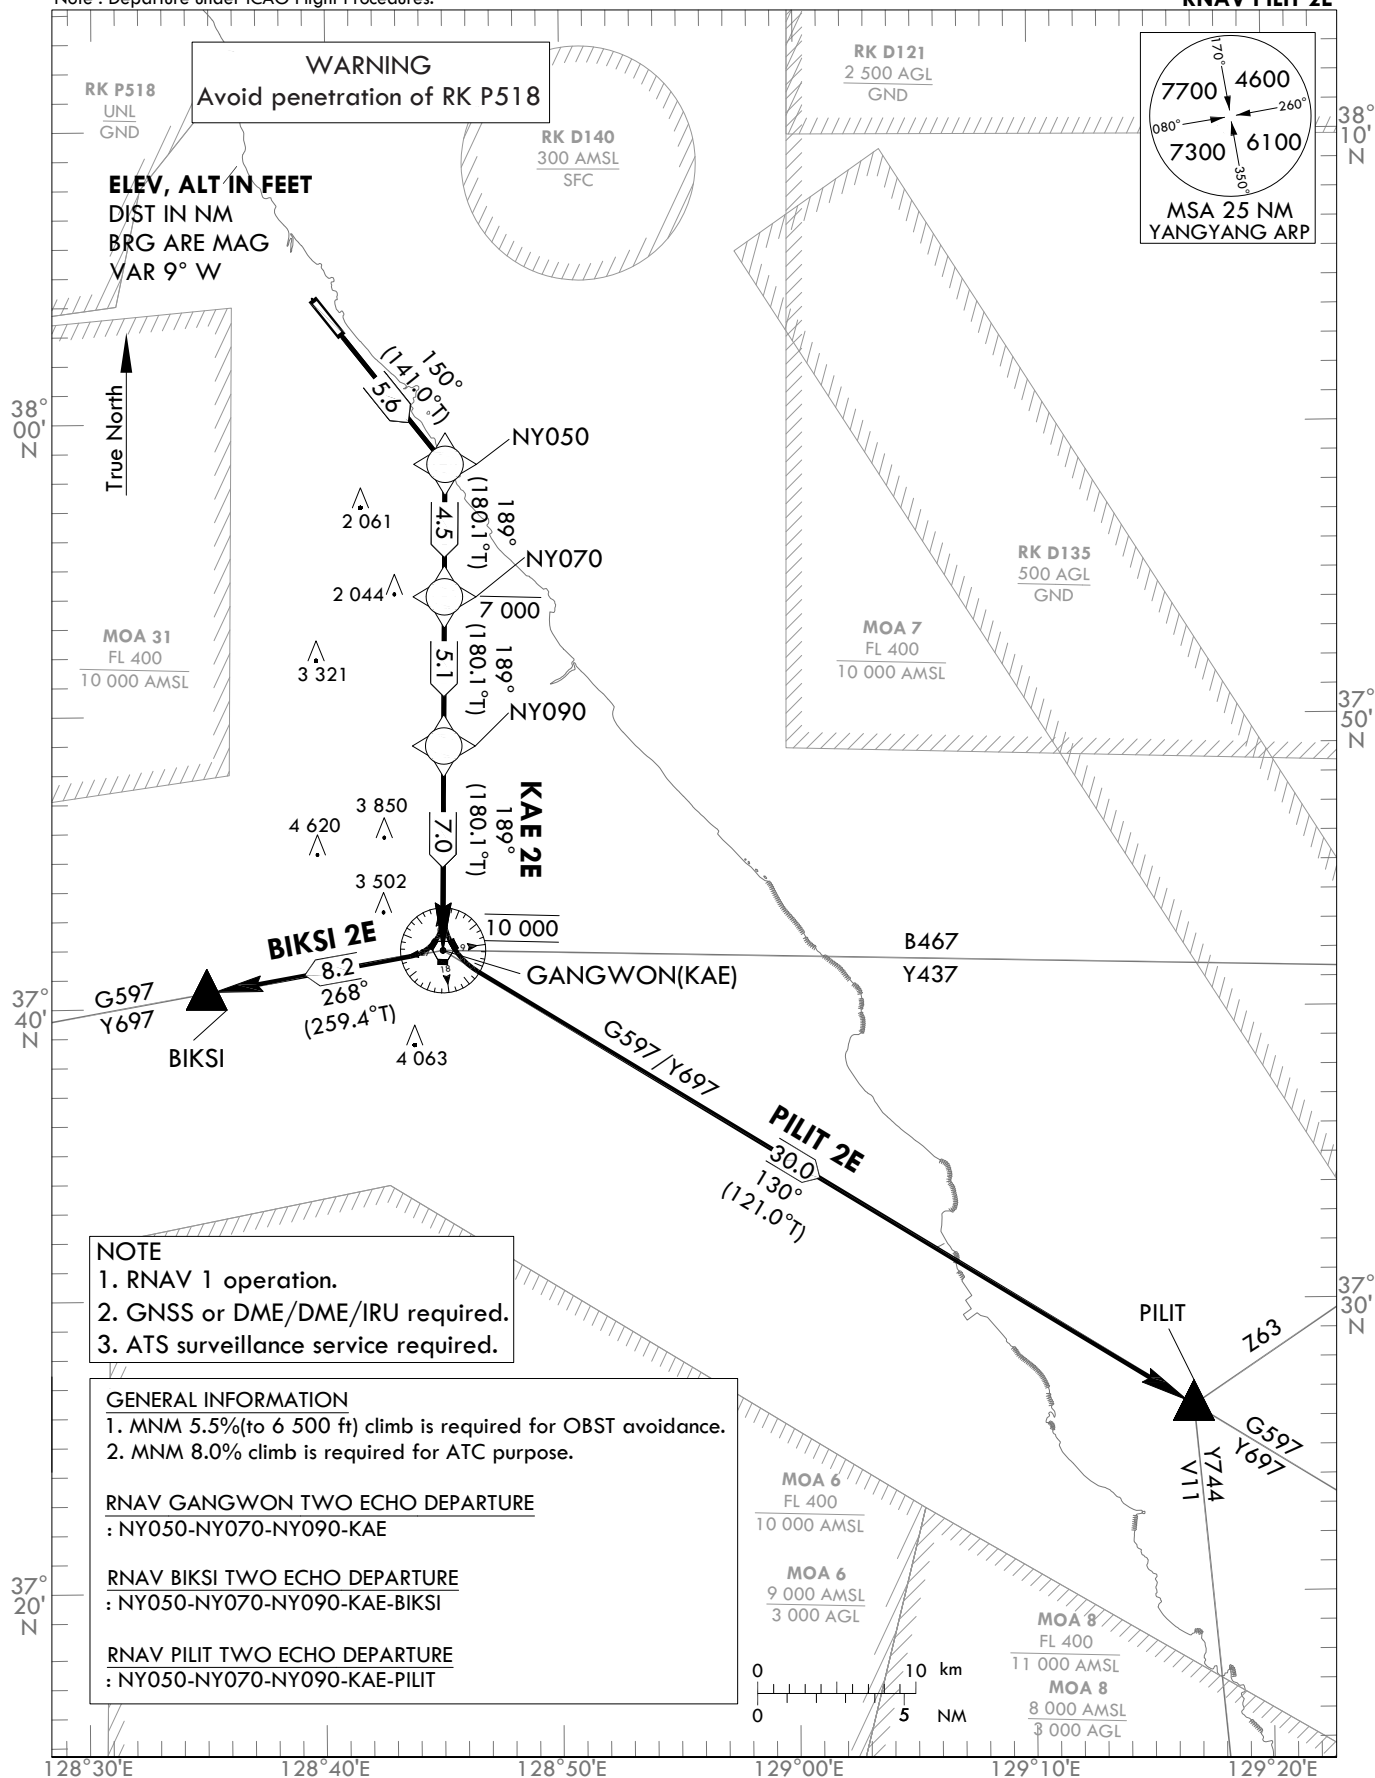

Change : Information of airspace restrictions(RK D121, D135, D140).

YANGYANG/Intl(RKNY)
RWY 15
RNAV KAE 2E, RNAV BIKSI 2E
RNAV PILIT 2E

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV KAE 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH*	Navigation specification	Remarks
001	CF	NY050	-	150(141.0)	5.6	-	-	-	37°58'41.3"N 128°45'15.6"E	-	RNAV 1	-
002	TF	NY070	-	189(180.1)	4.5	-	-7 000	-	37°54'09.1"N 128°45'15.0"E	-	RNAV 1	-
003	TF	NY090	-	189(180.1)	5.1	-	-	-	37°49'03.2"N 128°45'14.4"E	-	RNAV 1	-
004	TF	KAE	-	189(180.1)	7.0	-	@10 000	-	37°42'02.8"N 128°45'13.6"E	-	RNAV 1	-

RNAV BIKSI 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH*	Navigation specification	Remarks
001	CF	NY050	-	150(141.0)	5.6	-	-	-	37°58'41.3"N 128°45'15.6"E	-	RNAV 1	-
002	TF	NY070	-	189(180.1)	4.5	-	-7 000	-	37°54'09.1"N 128°45'15.0"E	-	RNAV 1	-
003	TF	NY090	-	189(180.1)	5.1	-	-	-	37°49'03.2"N 128°45'14.4"E	-	RNAV 1	-
004	TF	KAE	-	189(180.1)	7.0	-	@10 000	-	37°42'02.8"N 128°45'13.6"E	-	RNAV 1	-
005	TF	BIKSI	-	268(259.4)	8.2	-	-	-	37°40'32.0"N 128°35'04.0"E	-	RNAV 1	-

RNAV PILIT 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH*	Navigation specification	Remarks
001	CF	NY050	-	150(141.0)	5.6	-	-	-	37°58'41.3"N 128°45'15.6"E	-	RNAV 1	-
002	TF	NY070	-	189(180.1)	4.5	-	-7 000	-	37°54'09.1"N 128°45'15.0"E	-	RNAV 1	-
003	TF	NY090	-	189(180.1)	5.1	-	-	-	37°49'03.2"N 128°45'14.4"E	-	RNAV 1	-
004	TF	KAE	-	189(180.1)	7.0	-	@10 000	-	37°42'02.8"N 128°45'13.6"E	-	RNAV 1	-
005	TF	PILIT	-	130(121.0)	30.0	-	-	-	37°26'31.4"N 129°17'30.8"E	-	RNAV 1	-

* The term TCH equates to the use of the term RDH, within this context of the FAS data block.


**STANDARD DEPARTURE
CHART INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GANGNEUNG DEP 124.6
YANGYANG TWR 118.85
124.375

YANGYANG/Intl(RKNY)
RWY 15
YAG 2S
YAG 2T

Note : Departure under ICAO Flight Procedures.

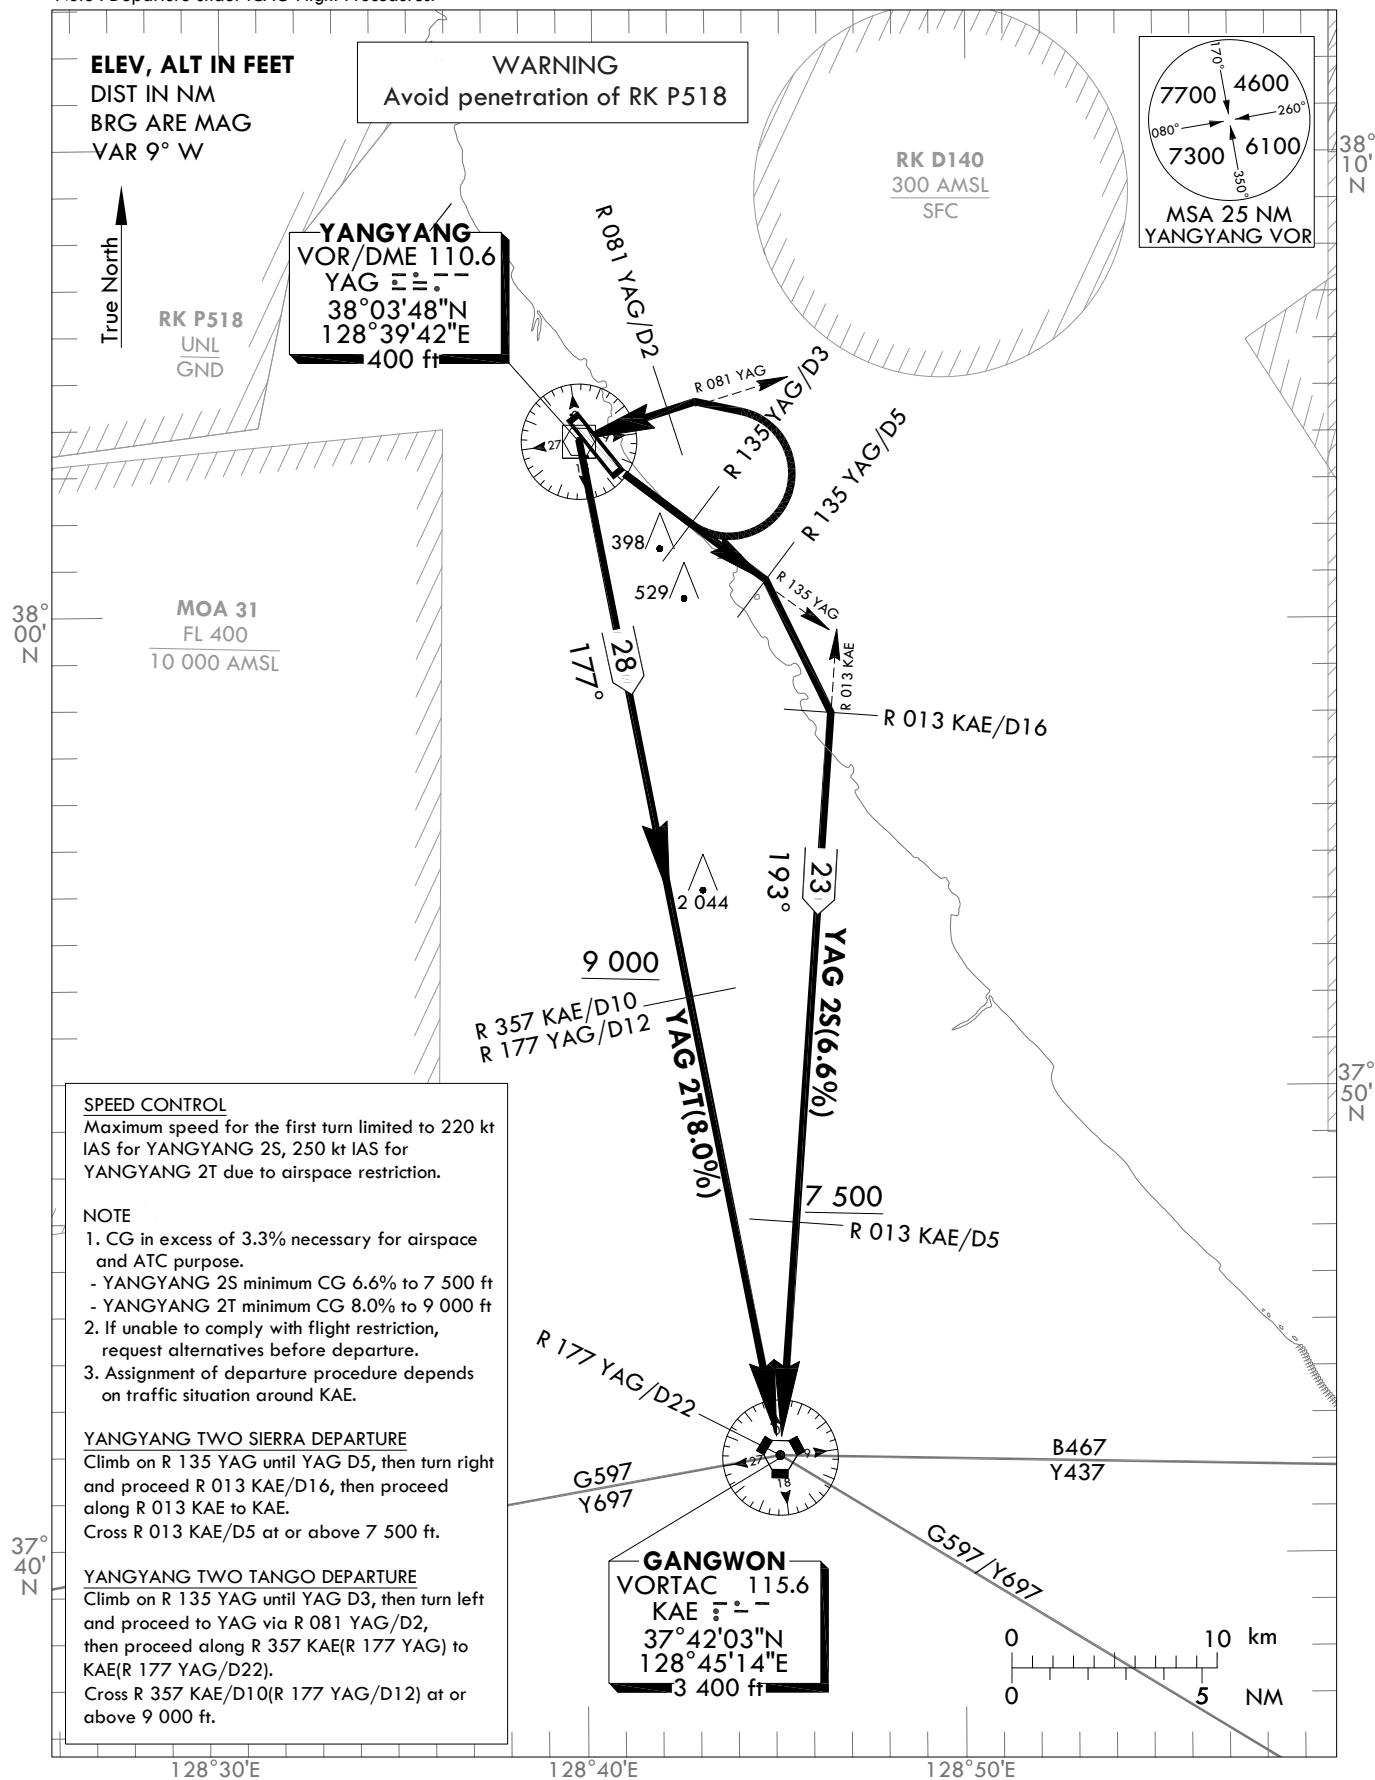

Change : Information of airspace restrictions(RK D140).

INTENTIONALLY

LEFT

BLANK

GANGNEUNG DEP	124.6
YANGYANG TWR	118.85
	124.375

YANGYANG/Intl(RKNY)
RWY 33
RNAV KAE 2N
RNAV BIKSI 2N
RNAV PILIT 2N

WARNING
Avoid penetration of RK P518

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.

GENERAL INFORMATION
1. Maximum speed for the first turn(to NY040) is limited to 240 kt IAS due to airspace restriction(RK P518).
2. MNM 6.6% climb is required for ATC purpose.

RNAV GANGWON TWO NOVEMBER DEPARTURE
: NY000-NY040-NY050-NY070-NY090-KAE

RNAV BIKSI TWO NOVEMBER DEPARTURE
: NY000-NY040-NY050-NY070-NY090-KAE-BIKSI

RNAV PILIT TWO NOVEMBER DEPARTURE
: NY000-NY040-NY050-NY070-NY090-KAE-PILIT

ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 9° W

True North

Scale:
0 10 km
0 5 NM

Waypoints and Altitudes:
NY000 (330.9°T)
NY040 (180.1°T)
NY050 (180.1°T)
NY070 (180.1°T)
NY090 (180.1°T)
KAE 2N (180.1°T)
BIKSI 2N (259.4°T)
PILIT 2N (121.0°T)

Obstacles and MOAs:
RK P518 UNL GND
RK D140 300 AMSL SFC
RK D121 2 500 AGL GND
RK D135 500 AGL GND
MOA 31 FL 400 10 000 AMSL
MOA 7 FL 400 10 000 AMSL
MOA 6 FL 400 10 000 AMSL
MOA 8 FL 400 11 000 AMSL
MOA 8 8 000 AMSL 3 000 AGL

Other Labels:
BIKSI
G597 Y697
GANGWON(KAE)
B467/Y437
PILIT
Z63
Y744 V11

AIRAC AIP AMDT 5/26
Effective : 1600UTC 10 JUN 2026

YANGYANG/Intl(RKNY)
RWY 33
RNAV KAE 2N, RNAV BIKSI 2N
RNAV PILIT 2N

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV KAE 2N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH*	Navigation specification	Remarks
001	CF	NY000	Y	330(320.9)	1.8	-	-	-240	38°05'45.5"N 128°38'00.9"E	-	RNAV 1	-
002	DF	NY040	-	-	-	R	-	-240	38°03'27.0"N 128°45'16.2"E	TCH*	RNAV 1	-
003	TF	NY050	-	189(180.1)	4.8	-	+5 000	-	37°58'41.3"N 128°45'15.6"E	-	RNAV 1	-
004	TF	NY070	-	189(180.1)	4.5	-	-	-	37°54'09.1"N 128°45'15.0"E	-	RNAV 1	-
005	TF	NY090	-	189(180.1)	5.1	-	-	-	37°49'03.2"N 128°45'14.4"E	-	RNAV 1	-
006	TF	KAE	-	189(180.1)	7.0	-	@10 000	-	37°42'02.8"N 128°45'13.6"E	-	RNAV 1	-

RNAV BIKSI 2N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH*	Navigation specification	Remarks
001	CF	NY000	Y	330(320.9)	1.8	-	-	-240	38°05'45.5"N 128°38'00.9"E	-	RNAV 1	-
002	DF	NY040	-	-	-	R	-	-240	38°03'27.0"N 128°45'16.2"E	TCH*	RNAV 1	-
003	TF	NY050	-	189(180.1)	4.8	-	+5 000	-	37°58'41.3"N 128°45'15.6"E	-	RNAV 1	-
004	TF	NY070	-	189(180.1)	4.5	-	-	-	37°54'09.1"N 128°45'15.0"E	-	RNAV 1	-
005	TF	NY090	-	189(180.1)	5.1	-	-	-	37°49'03.2"N 128°45'14.4"E	-	RNAV 1	-
006	TF	KAE	-	189(180.1)	7.0	-	@10 000	-	37°42'02.8"N 128°45'13.6"E	-	RNAV 1	-
007	TF	BIKSI	-	268(259.4)	8.2	-	-	-	37°40'32.0"N 128°35'04.0"E	-	RNAV 1	-

RNAV PILIT 2N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH*	Navigation specification	Remarks
001	CF	NY000	Y	330(320.9)	1.8	-	-	-240	38°05'45.5"N 128°38'00.9"E	-	RNAV 1	-
002	DF	NY040	-	-	-	R	-	-240	38°03'27.0"N 128°45'16.2"E	TCH*	RNAV 1	-
003	TF	NY050	-	189(180.1)	4.8	-	+5 000	-	37°58'41.3"N 128°45'15.6"E	-	RNAV 1	-
004	TF	NY070	-	189(180.1)	4.5	-	-	-	37°54'09.1"N 128°45'15.0"E	-	RNAV 1	-
005	TF	NY090	-	189(180.1)	5.1	-	-	-	37°49'03.2"N 128°45'14.4"E	-	RNAV 1	-
006	TF	KAE	-	189(180.1)	7.0	-	@10 000	-	37°42'02.8"N 128°45'13.6"E	-	RNAV 1	-
007	TF	PILIT	-	130(121.0)	30.0	-	-	-	37°26'31.4"N 129°17'30.8"E	-	RNAV 1	-

* The term TCH equates to the use of the term RDH, within this context of the FAS data block.


**STANDARD DEPARTURE
CHART INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GANGNEUNG DEP 124.6
YANGYANG TWR 118.85
124.375

YANGYANG/Intl(RKNY)
RWY 33
YAG 2A

Note : Departure under ICAO Flight Procedures.

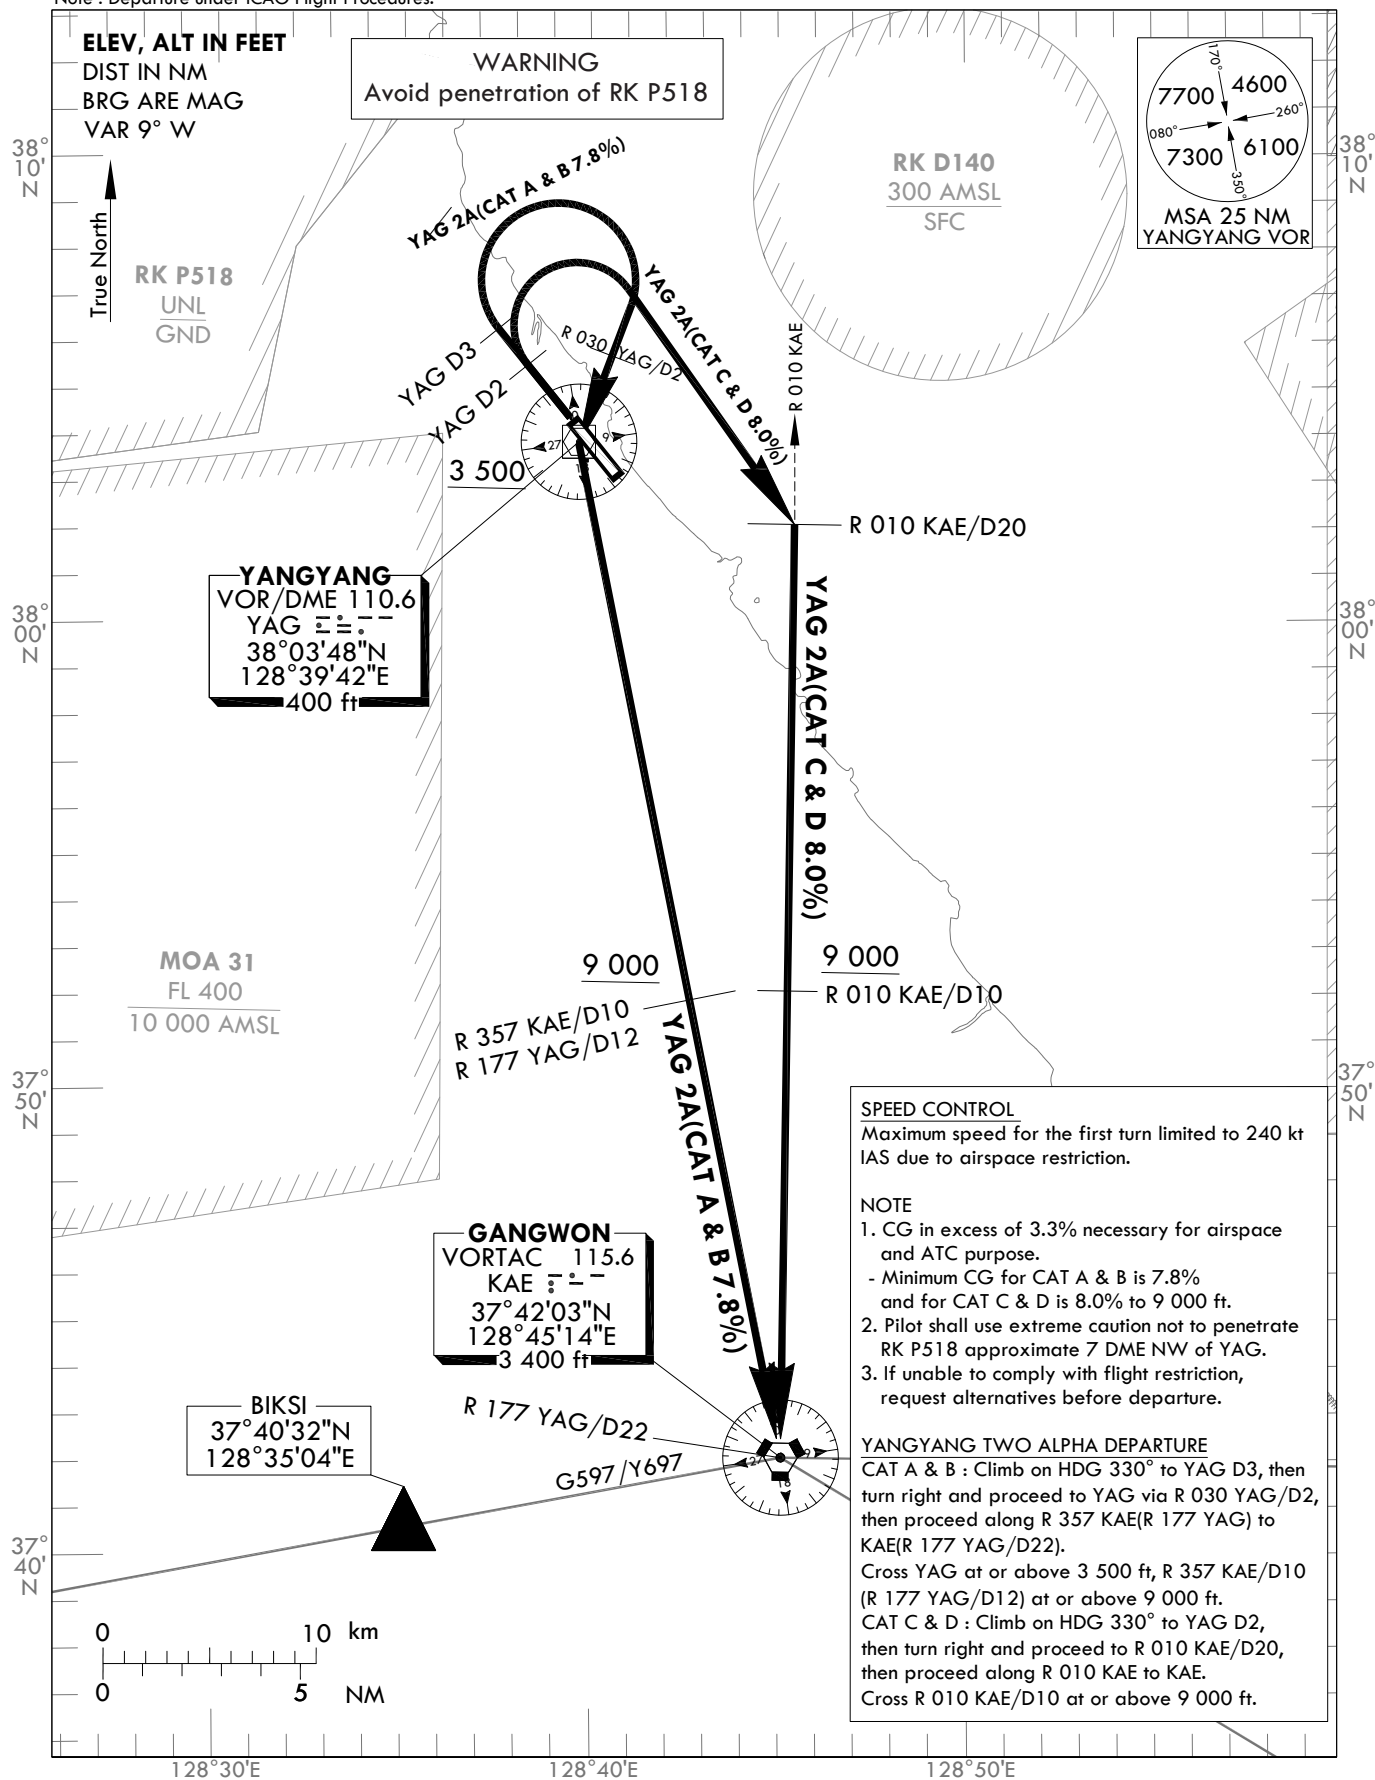

Change : Information of airspace restrictions(RK D140).

INTENTIONALLY

LEFT

BLANK