

STANDARD ARRIVAL CHART
INSTRUMENT(STAR) - ICAO

Note : Arrival under ICAO Flight Procedures.


TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON APP 134.0 134.1
134.4
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)

RWY 06 L/R

RNP OSPOT 1P, RNP OSPOT 1B
RNP BIGOB 1B, RNP MAKDU 1B

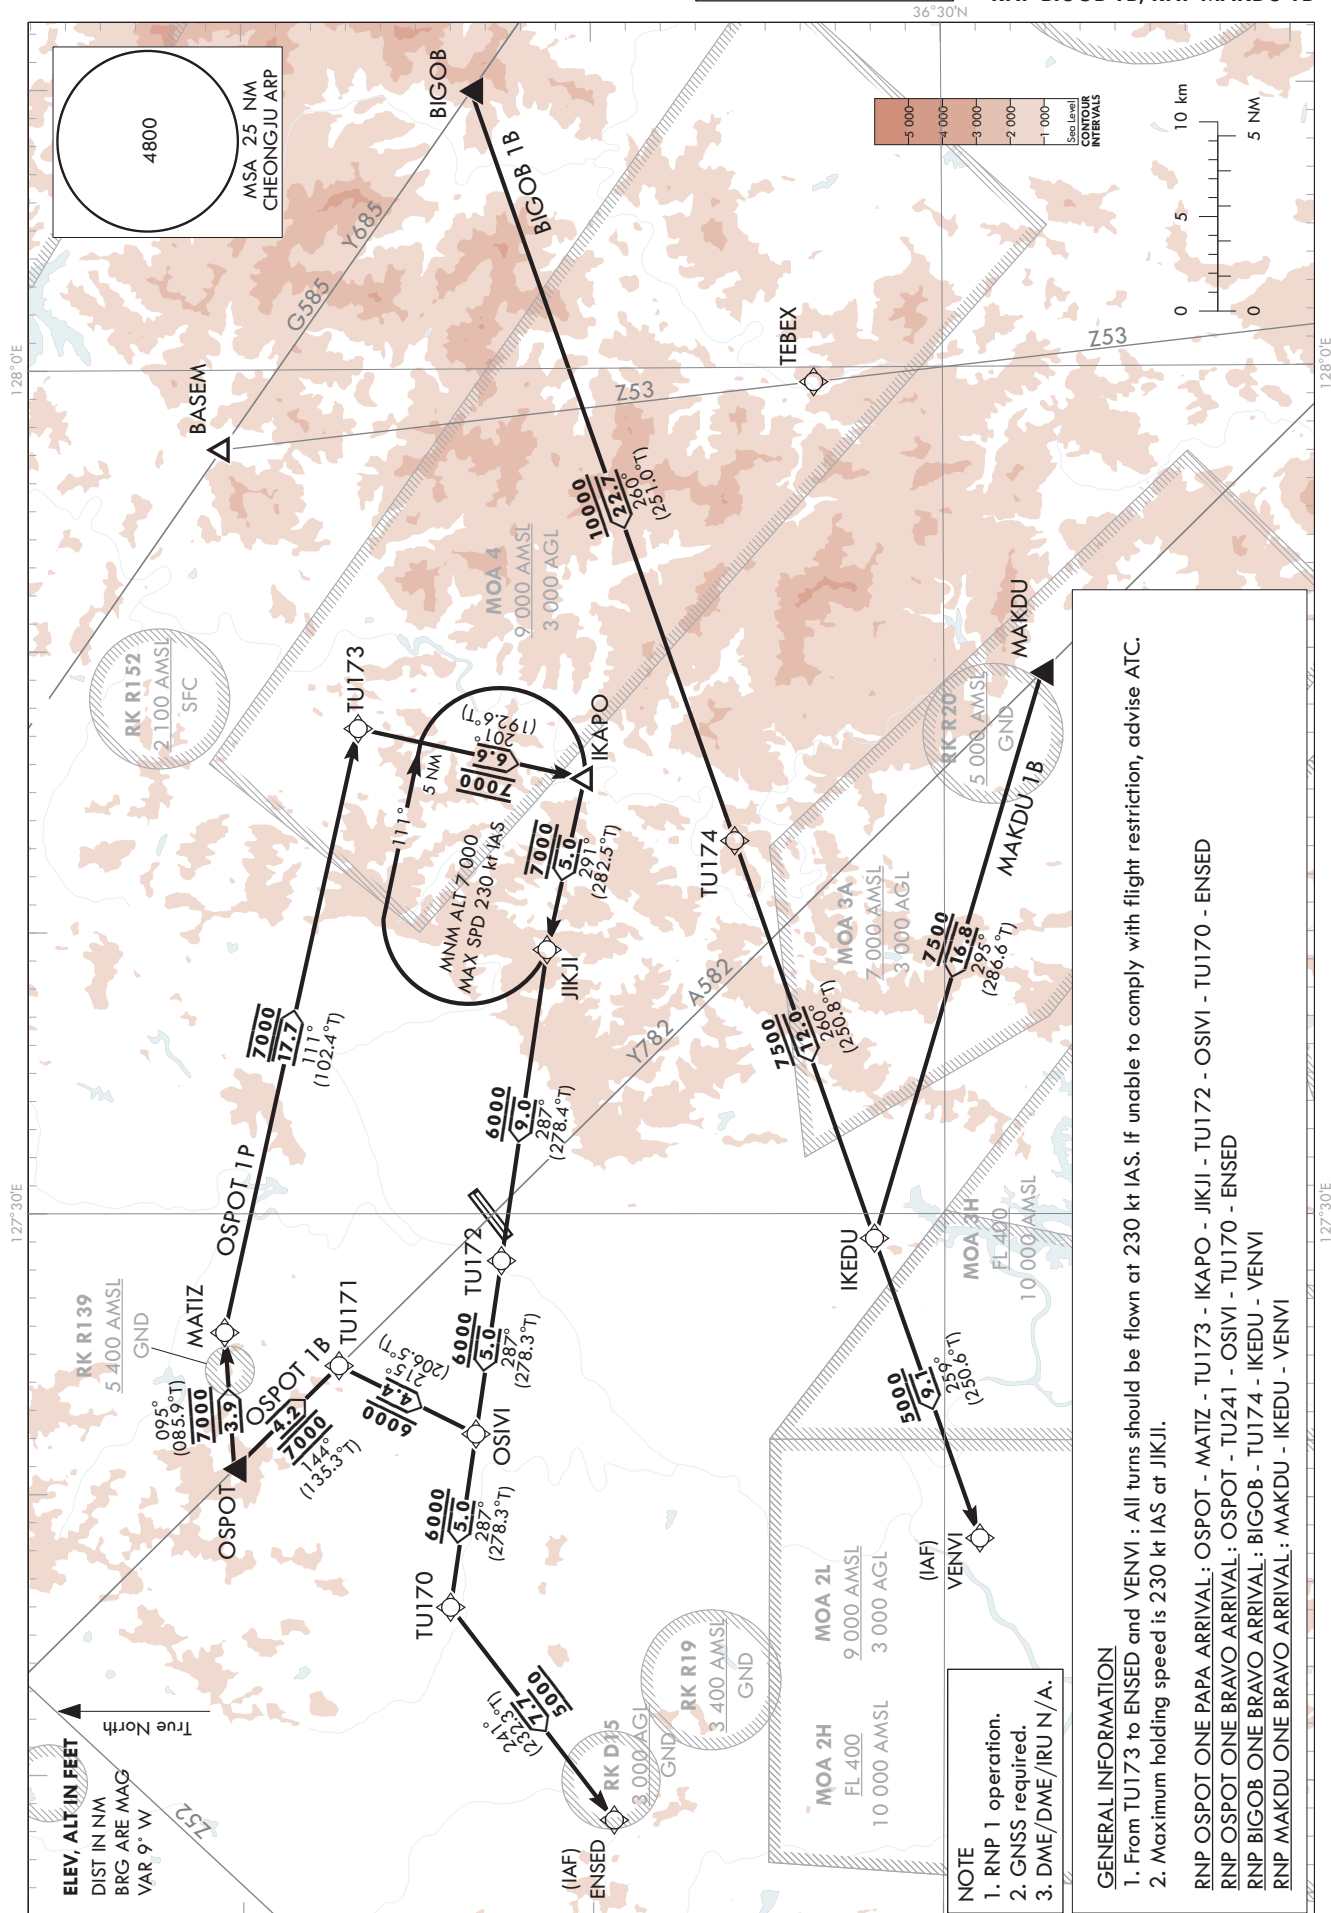

Change : Establishment and Information of standard instrument arrival procedure for RWY 06L/R.

CHEONGJU/Cheongju INTL(RKTU)

RWY 06L/R

RNP OSPOT 1P, RNP OSPOT 1B

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNP OSPOT 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	OSPOT	-	-	-	-	@7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	MATIZ	-	095(085.9)	3.9	-	@7 000	-	36°50'34.9"N 127°25'46.1"E	-	RNP 1	-
003	TF	TUI73	-	111(102.4)	17.7	-	@7 000	-230	36°46'44.7"N 127°47'14.2"E	-	RNP 1	-
004	TF	IKAPO	-	201(192.6)	6.6	-	@7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	-
005	TF	JKI1	-	291(282.5)	5.0	-	@7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP 1	-
006	TF	TUI72	-	287(278.4)	9.0	-	+6 000	-230	36°42'40.4"N 127°28'19.6"E	-	RNP 1	-
007	TF	OSVI	-	287(278.3)	5.0	-	+6 000	-230	36°43'23.8"N 127°22'10.3"E	-	RNP 1	-
008	TF	TUI70	-	287(278.3)	5.0	-	+6 000	-230	36°44'06.8"N 127°16'01.0"E	-	RNP 1	-
009	TF	ENSED	-	241(232.3)	7.7	-	+5 000	-230	36°39'25.0"N 127°08'29.0"E	-	RNP 1	-

RNP OSPOT 1B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	OSPOT	-	-	-	-	@7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	TUI71	-	144(135.3)	4.2	-	@7 000	-	36°47'18.7"N 127°24'35.6"E	-	RNP 1	-
003	TF	OSVI	-	215(206.5)	4.4	-	+6 000	-230	36°43'23.8"N 127°22'10.3"E	-	RNP 1	-
004	TF	TUI70	-	287(278.3)	5.0	-	+6 000	-230	36°44'06.8"N 127°16'01.0"E	-	RNP 1	-
005	TF	ENSED	-	241(232.3)	7.7	-	+5 000	-230	36°39'25.0"N 127°08'29.0"E	-	RNP 1	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
RNP OPSOT 1P	HM	JKI1	Y	291(282.5)	-	R	+7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP 1	5 NM Leg

Change : Establishment and Information of standard instrument arrival procedure for RWY 06L/R.

CHEONGJU/Cheongju INTL(RKTU)

RWY 06L/R

RNP BIGOB 1B, RNP MAKDU 1B

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNP BIGOB 1B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH
001	IF	BIGOB	-	-	-	-	+12 000	-	36°43'25.4"N 128°09'52.0"E	-
002	TF	TUI74	-	260(251.0)	22.7	-	+10 000	-	36°35'59.4"N 127°43'13.3"E	-
003	TF	IKEDU	-	260(250.8)	12.0	-	+7 500	-	36°32'00.5"N 127°29'07.6"E	-
004	TF	VENVI	-	259(250.6)	9.1	-	+5 000	-230	36°28'59.3"N 127°18'30.9"E	-

RNP MAKDU 1B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH
001	IF	MAKDU	-	-	-	-	+8 000	-	36°27'12.3"N 127°49'09.0"E	-
002	TF	IKEDU	-	295(286.6)	16.8	-	+7 500	-	36°32'00.5"N 127°29'07.6"E	-
003	TF	VENVI	-	259(250.6)	9.1	-	+5 000	-230	36°28'59.3"N 127°18'30.9"E	-

Change : Establishment and Information of standard instrument arrival procedure for RWY 06L/R.

INTENTIONALLY

LEFT

BLANK

STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO

Note : Arrival under ICAO Flight Procedures.


TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON APP 134.0 134.1
134.4
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)

RWY 24 L/R

RNP OSPOT 1A, RNP OSPOT 1T
RNP BIGOB 1A, RNP MAKDU 1A

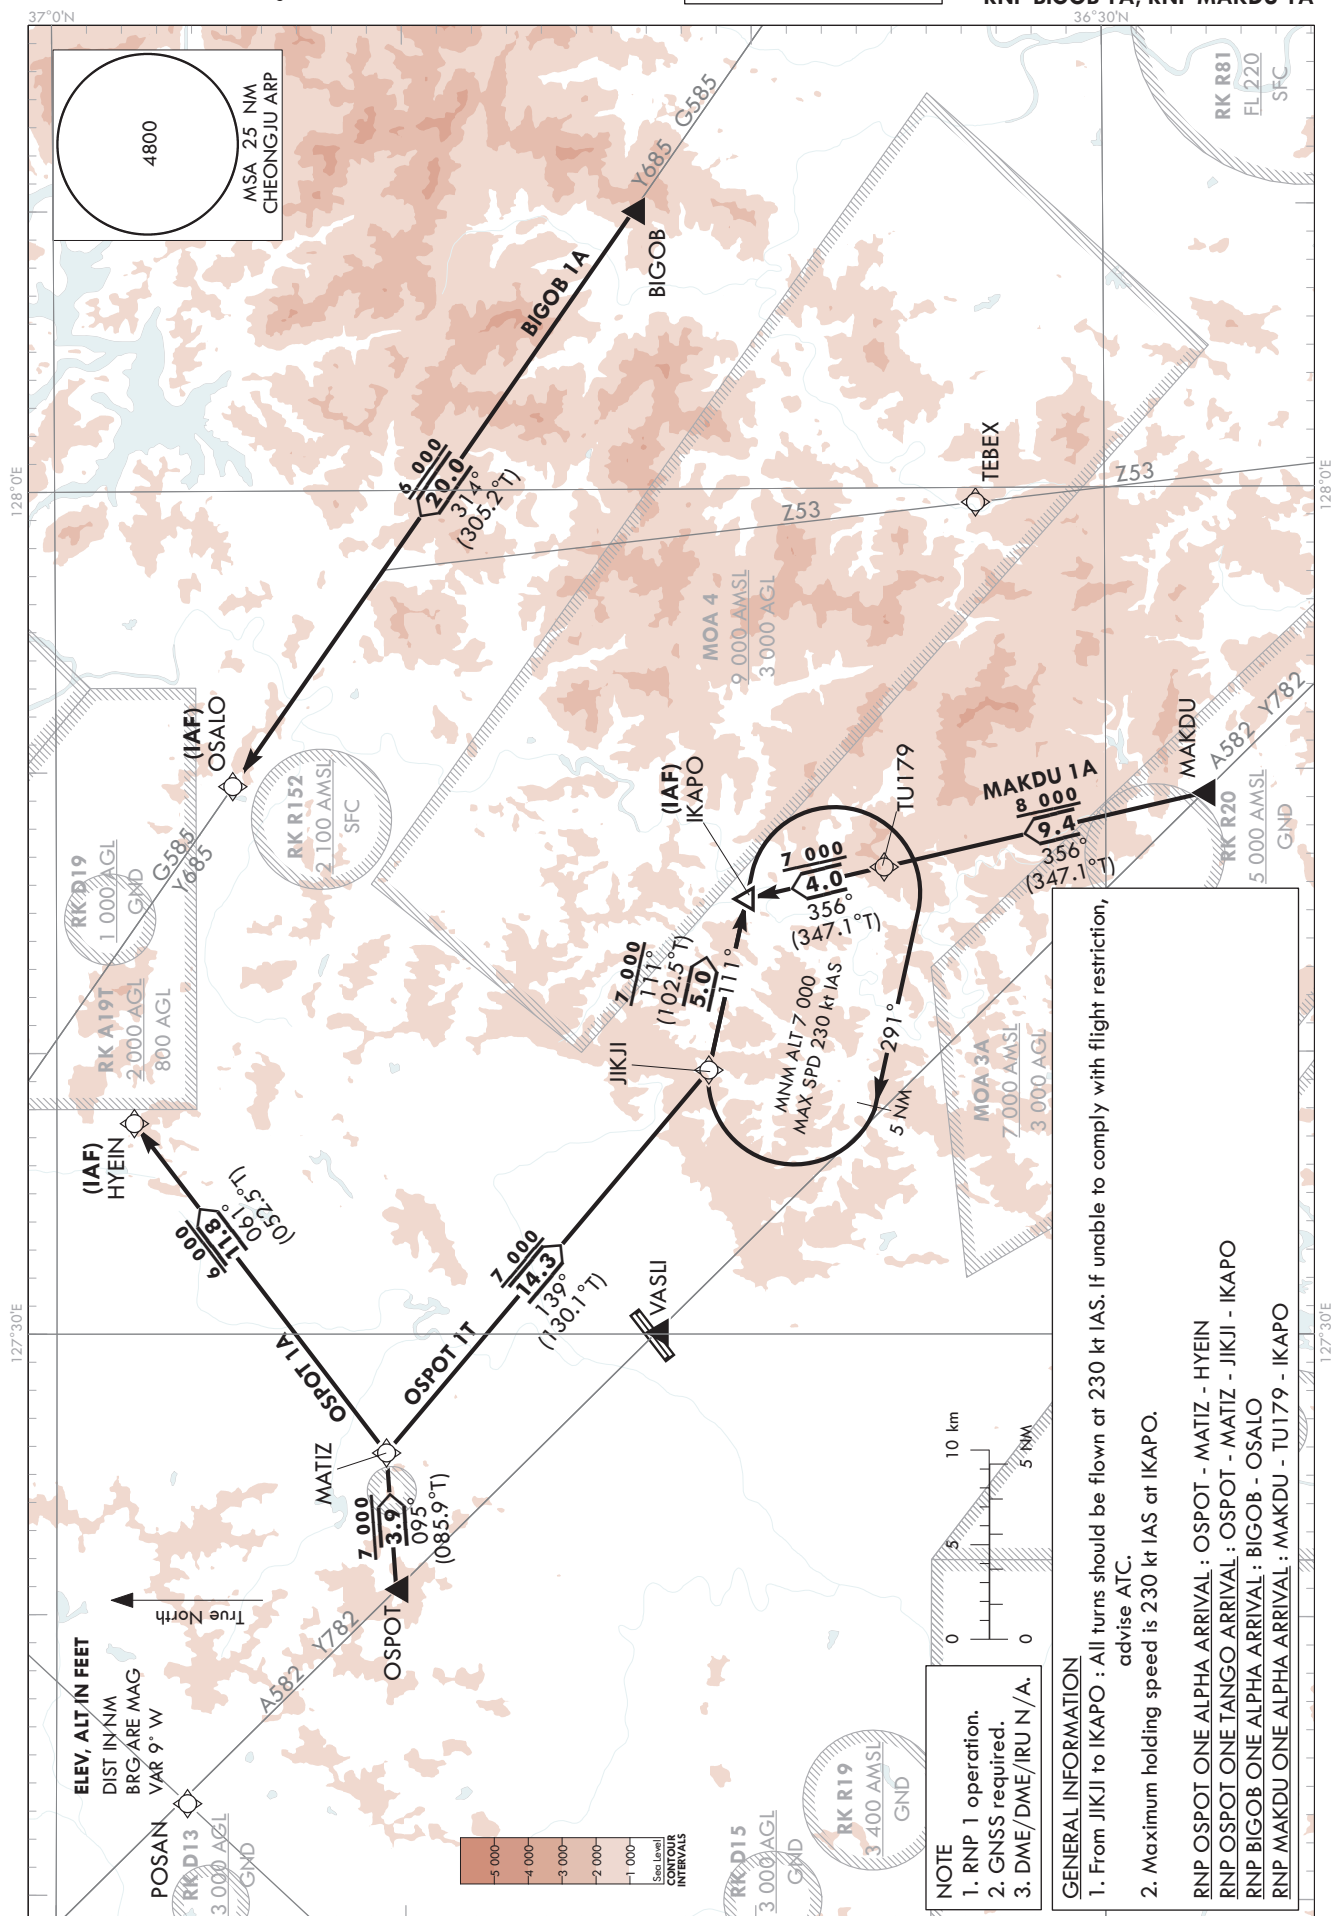

Change : Establishment and Information of standard instrument arrival procedure for RWY 24L/R.

CHEONGJU/Cheongju INTL(RKTU)

RWY 24L/R

RNP OSPOT 1A, RNP OSPOT 1T

RNP BIGOB 1A, RNP MAKDU 1A

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNP OSPOT 1A

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	OSPOT	-	-	-	-	+7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	MATIZ	-	095(085.9)	3.9	-	+7 000	-	36°50'34.9"N 127°25'46.1"E	-	RNP 1	-
003	TF	HYEIN	-	061(052.5)	11.8	-	+6 000	-230	36°57'47.1"N 127°37'29.7"E	-	RNP 1	-

RNP OSPOT 1T

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	OSPOT	-	-	-	-	+7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	MATIZ	-	095(085.9)	3.9	-	+7 000	-	36°50'34.9"N 127°25'46.1"E	-	RNP 1	-
003	TF	JKJI	-	139(130.1)	14.3	-	+7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP 1	-
004	TF	IKAPO	-	111(102.5)	5.0	-	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	-

RNP BIGOB 1A

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	BIGOB	-	-	-	-	+12 000	-	36°43'25.4"N 128°09'52.0"E	-	RNP 1	-
002	TF	OSALO	-	314(305.2)	20.0	-	+6 000	-	36°54'56.9"N 127°49'29.3"E	-	RNP 1	-

RNP MAKDU 1A

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	MAKDU	-	-	-	-	+8 000	-	36°27'12.3"N 127°49'09.0"E	-	RNP 1	-
002	TF	TUI79	-	356(347.1)	9.4	-	+8 000	-	36°36'20.2"N 127°46'33.5"E	-	RNP 1	-
003	TF	IKAPO	-	356(347.1)	4.0	-	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
RNP OSPOT 1T												
RNP MAKDU 1A	HM	IKAPO	Y	111(102.2)	-	R	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	5 NM Leg

Change : Establishment and Information of standard instrument arrival procedure for RWY 24L/R.