



VIEW A - END

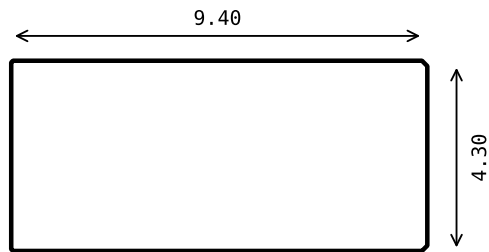

VIEW B - SIDE

VIEW C - PLAN

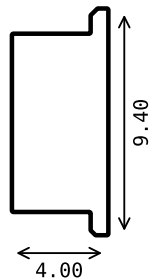

NOTES

1. MATERIAL: ALUMINIUM 6061-T6.
2. DIMENSIONS IN MILLIMETRES. GENERAL TOL. ISO 2768-m.
3. OUTLINES IN ALL VIEWS ARE PROJECTED DIRECTLY FROM armadillonium-button.step AT 0.08 mm SAMPLING. TAKE EVERY PROFILE FROM THE 3D FILE - IT IS THE CONTROLLING DOCUMENT.
4. THE FLANGE IS 0.80 THICK. THIS IS BELOW A 1.5 MINIMUM WALL RULE, BUT IT IS THE PART AS DESIGNED BY SQFMI AND IS IN VOLUME PRODUCTION TODAY. PLEASE ADVISE IF IT CANNOT BE HELD.
5. THE BOSS RUNS IN A $\varnothing 2.50$ BORE FORMED BETWEEN THE TOP BEZEL AND THE BOTTOM SHELL. HOLD ± 0.05 ON THE BOSS. CLEARANCE IS 0.20 AS DESIGNED - DO NOT TIGHTEN IT.
6. SURFACE ROUGHNESS 3.2 $\mu\text{m Ra}$.
7. NO THREADS. NO INSERTS.
8. FINISH: BEAD BLAST, THEN ANODISE TYPE II. MASK THE BOSS - COATING EATS THE CLEARANCE.
9. BREAK ALL SHARP EDGES 0.1 MAX.
10. QUANTITY 84 = 4 PER WATCH x 21 WATCHES.

OUTLINES PROJECTED FROM THE 3D FILE. VERIFY AGAINST A PHYSICAL SAMPLE.

TITLE ARMADILLONIUM BUTTON	PART WATCHYCASE BUTTON	MATERIAL AL 6061-T6	QTY 84
DRAWN FOR BTC TECHNOLOGIES / BWATCH bw-1	UNITS MILLIMETRE	GENERAL TOL ISO 2768-m	SHEET 1 OF 1 · A4