
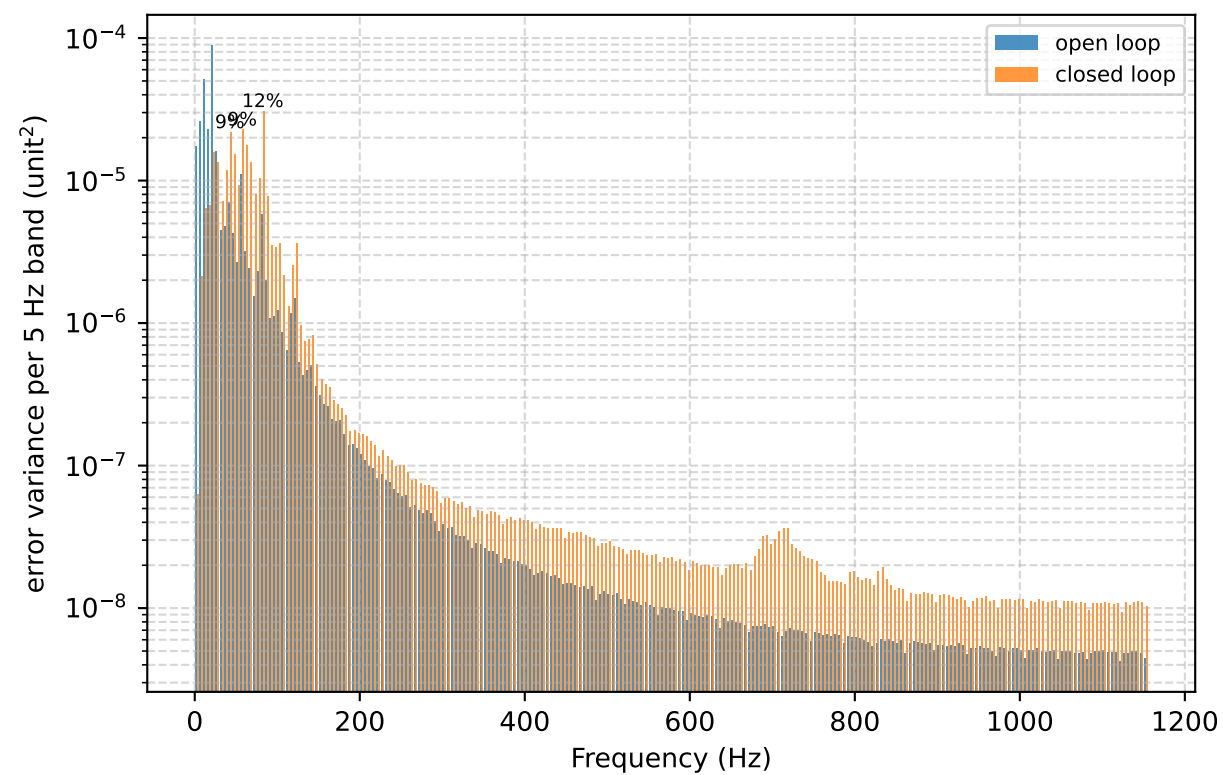
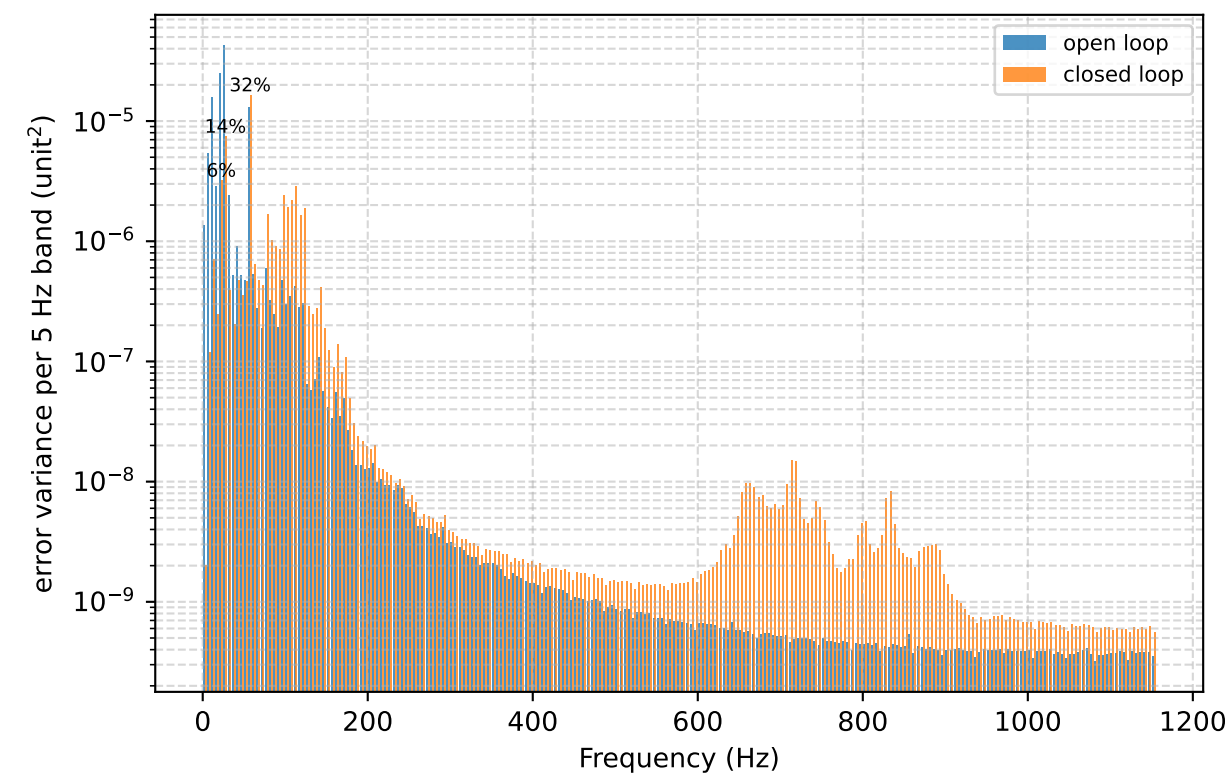
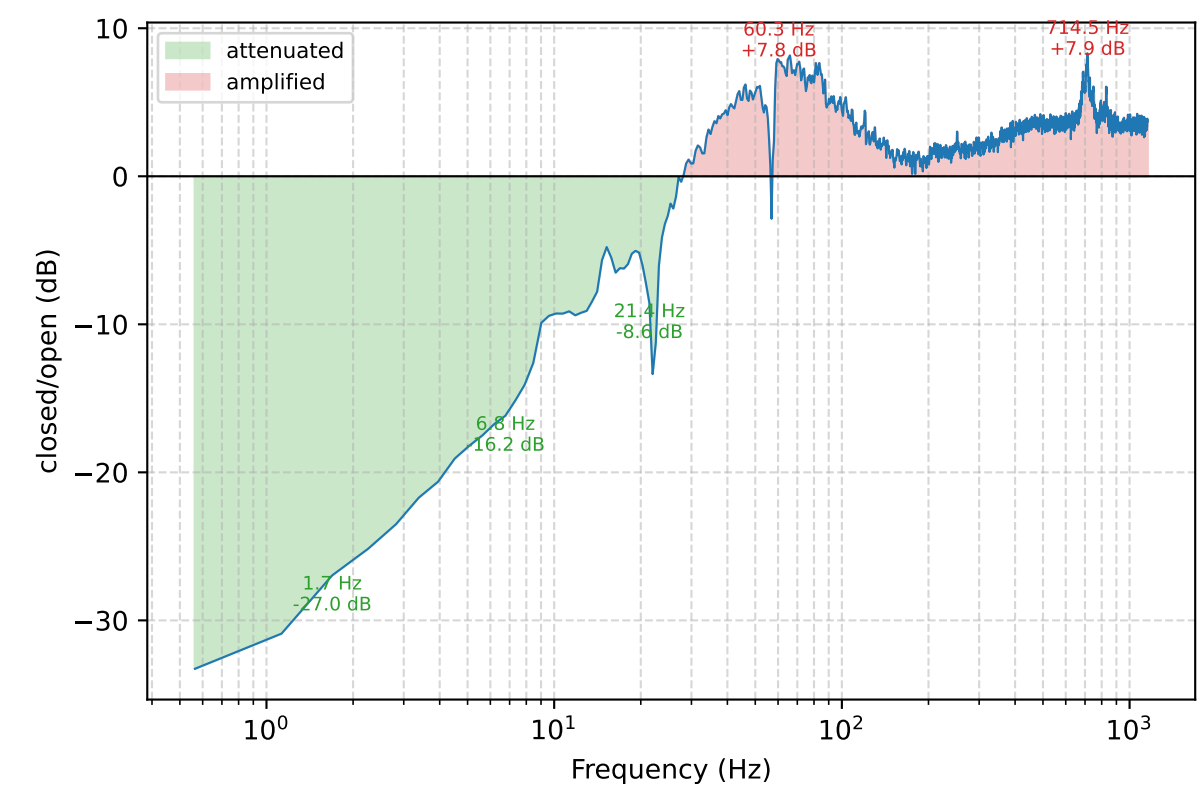
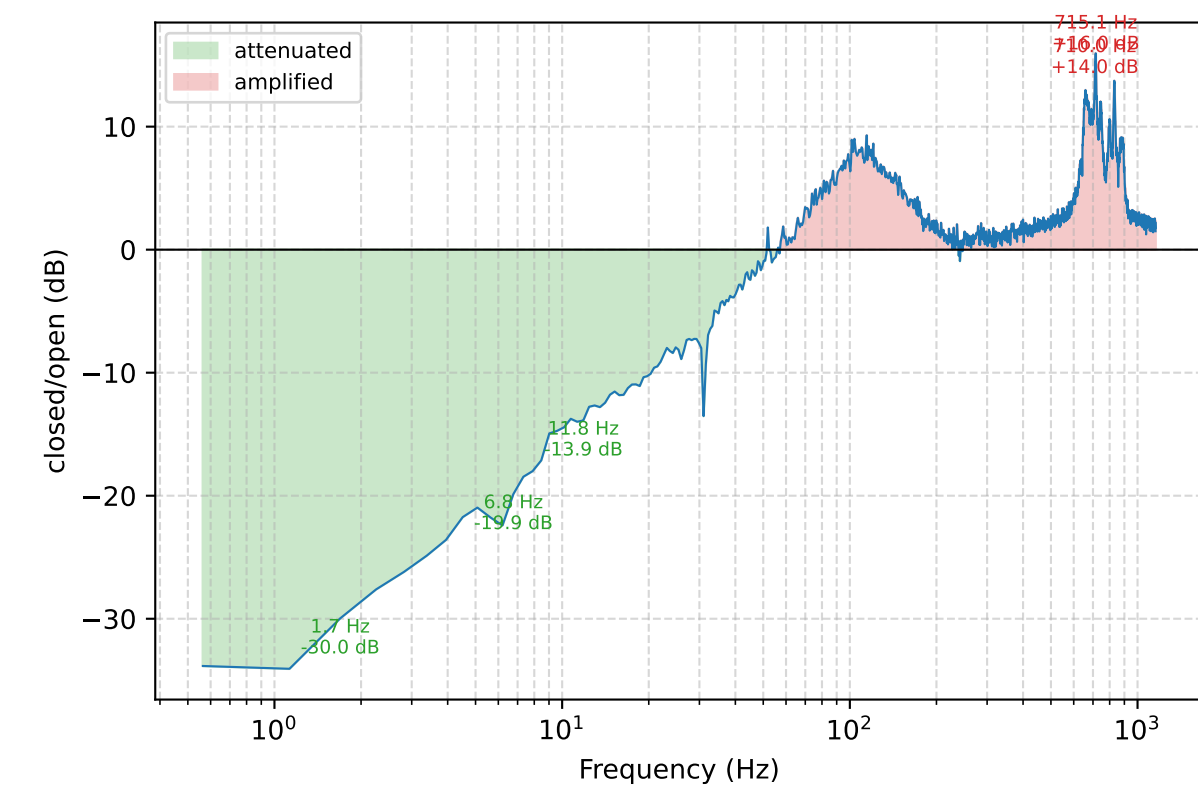
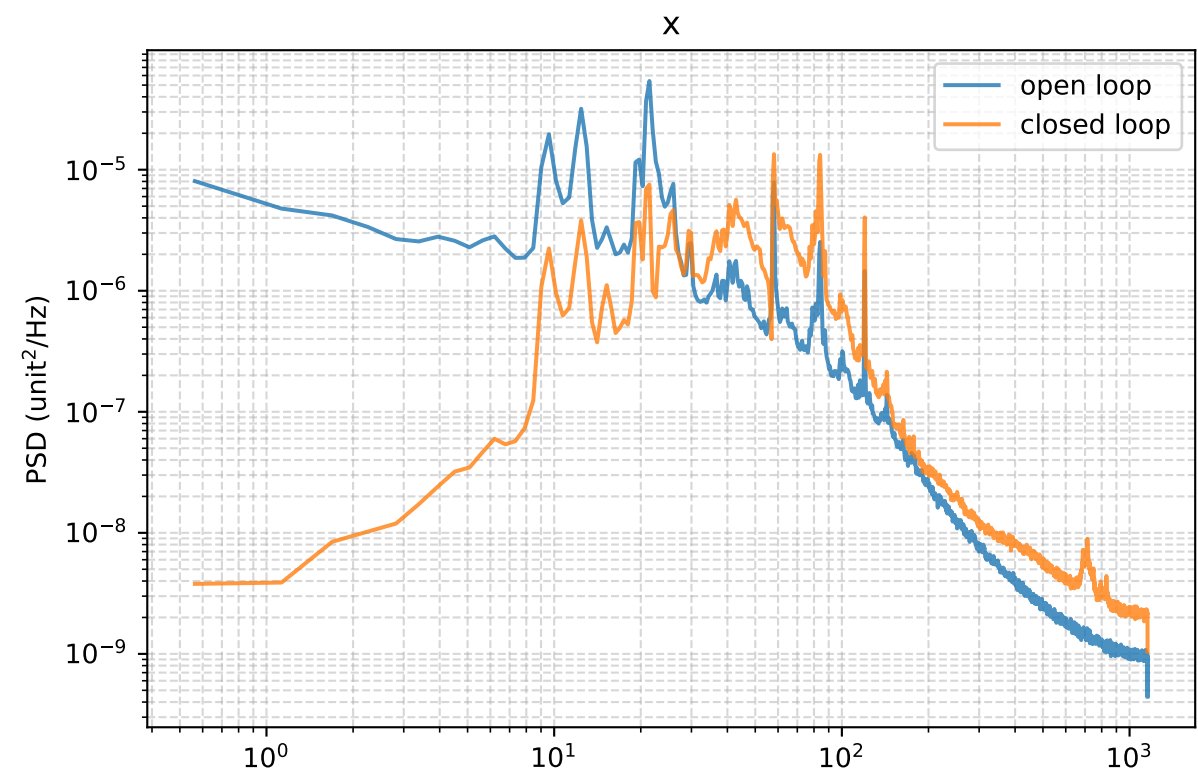


Closed-loop attenuation

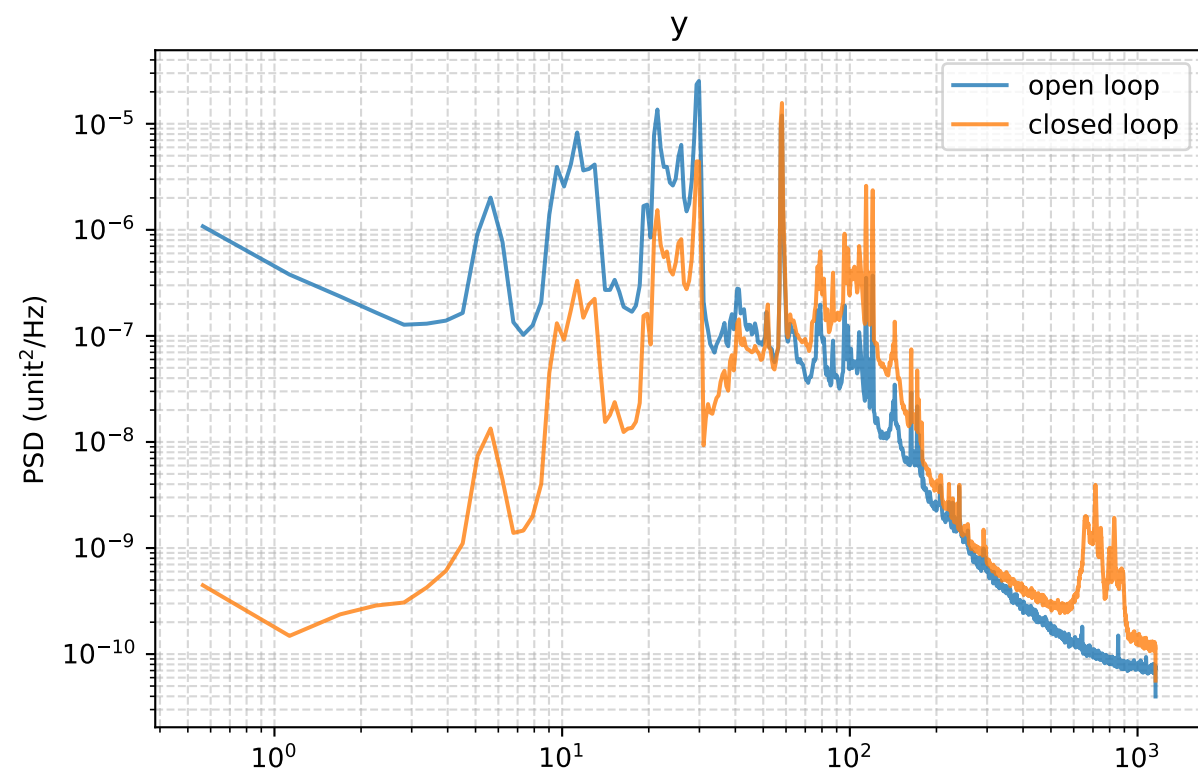

Run configuration and per-band RMS

Started: 2026-07-13 12:29:54
pixel_scale: 31.5 px per output unit
y: mean -4.373 -> +0.000 px; RMS about mean 0.378 -> 0.226 px (open -> closed)
x: mean +6.724 -> -0.000 px; RMS about mean 0.742 -> 0.502 px (open -> closed)

Config used:
camera ASI290MM 64x64, ROI start (920,488), ~2310 Hz loop
pid: integrator-only (p=py=d=0), i=600 iy=1300, units=minmax
lines x=[
[22.08,57.3] gain=[60,20] phase=[56,3]
linesy=[30.8] gainy=[60] phasey=[60], line_delay=0.002
kalman: order=60 horizon=5 mu=0.03 gain=1.0
[] gainy=0 ramp=10
piplate: fine ch0(+2)/ch1(-2), coarse parked, baud 460800, start_delay: 100.00, open_time: 500.0, settle_time: 100.0, closed_time: 500.0

RMS contributed by each 10 Hz band (px)

band (Hz)	y open	y closed	x open	x closed
0-10	0.0819	0.0109	0.2076	0.0466
10-20	0.1360	0.0307	0.2711	0.1145
20-30	0.2589	0.1027	0.3222	0.1703
30-40	0.0538	0.0243	0.0961	0.1378
40-50	0.0376	0.0286	0.1061	0.1923
50-60	0.1159	0.1294	0.1168	0.1785
60-70	0.0283	0.0333	0.0749	0.1763
70-80	0.0278	0.0455	0.0621	0.1349
80-90	0.0237	0.0437	0.0882	0.1957
90-100	0.0256	0.0570	0.0468	0.0829
100-110	0.0253	0.0638	0.0457	0.0758
110-120	0.0264	0.0669	0.0424	0.0620
120-130	0.0192	0.0465	0.0448	0.0675
130-140	0.0113	0.0228	0.0298	0.0388
140-150	0.0128	0.0244	0.0293	0.0364
150-160	0.0086	0.0146	0.0240	0.0278
160-170	0.0095	0.0147	0.0217	0.0252
170-180	0.0087	0.0125	0.0202	0.0228
180-190	0.0056	0.0073	0.0174	0.0199
190-200	0.0051	0.0064	0.0165	0.0185
200-210	0.0052	0.0062	0.0150	0.0180
210-220	0.0045	0.0050	0.0139	0.0169
220-230	0.0043	0.0048	0.0129	0.0155
230-240	0.0042	0.0045	0.0124	0.0149
240-250	0.0039	0.0040	0.0115	0.0141
250-260	0.0034	0.0038	0.0111	0.0138
260-270	0.0029	0.0032	0.0101	0.0126
270-280	0.0028	0.0032	0.0097	0.0121
280-290	0.0027	0.0030	0.0097	0.0119
290-300	0.0027	0.0030	0.0087	0.0110
total 0-300	0.3394	0.2254	0.5339	0.4983