




GC-320

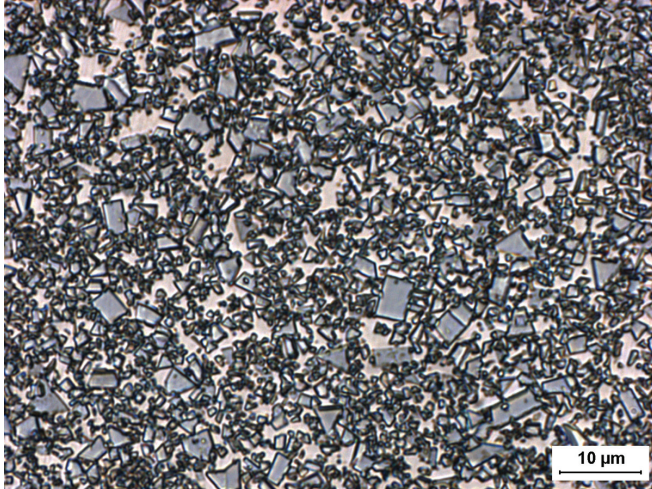

Microstructure

Composition

Tungsten Carbide (Medium)	80.0%
Cobalt	20.0%

Physical Properties

Hardness, HRA (ASTM B294)	85.1 - 86.6
Density, g/cc (ASTM B311)	13.46 - 13.64
Average Transverse Rupture Strength, psi (ASTM B406)	470,000
Typical Porosity (ASTM B276)	A02-B00-C00

PERFORMANCE CHARACTERISTICS

	LESS			MORE
Wear Resistance	■	■	□	□
Impact Resistance	■	■	■	■
Galling Resistance	■	□	□	□
Corrosion Resistance	■	□	□	□

*To ensure the highest metallurgical quality,
General Carbide processes all grades in
sinter-HIP furnaces.*

Grade Attributes

The medium carbide particle grain size coupled with the higher binder content provides a mechanically robust grade with sufficient wear resistance and capability to withstand high impact loads under dynamic conditions.

Typical Applications

- > Metalforming Punches & Dies
- > Tube Drawing Inserts
- > Heading Die Inserts
- > Mandrels

Please visit our website for the latest grade specification information.



GENERALCARBIDE®

1151 Garden Street
Greensburg, PA 15601-6417 USA

T 800.245.2465 • 724.836.3000
F 800.547.2659 • 724.836.6274

sales@generalcarbide.com
www.generalcarbide.com