

1

2

3

4

5

6

A

A

B


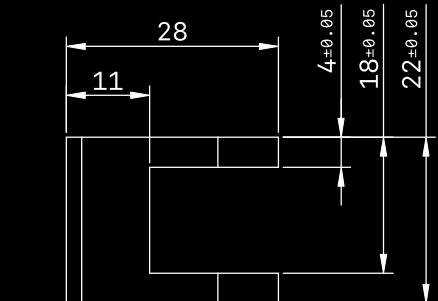
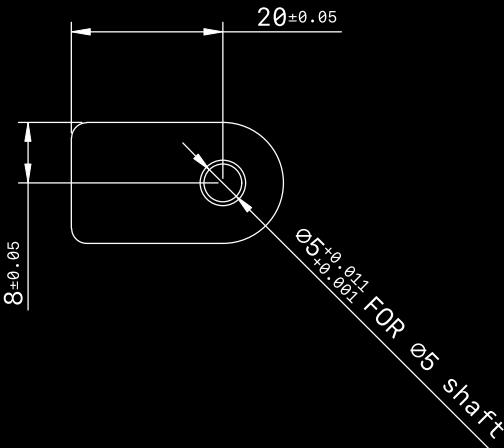
B

C

C

D

D

 $M5 \times 0.8$ 
 $8 \pm 0.05$   
 $16 \pm 0.05$ 

 $11 \pm 0.05$ 

 $4 \pm 0.05$   
 $18 \pm 0.05$   
 $22 \pm 0.05$ 


STANDARD TOLERANCES  
UNLESS SPECIFIED

$x$  =  $\pm 0.100$

$x.x$  =  $\pm 0.050$

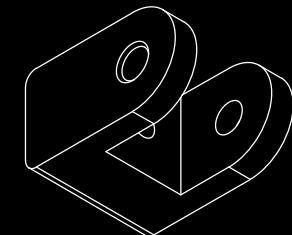
$x.xx$  =  $\pm 0.010$

ANGLES =  $\pm 0.50^\circ$

1. MACHINED  $0.5 \times 0.5$  CHAMFER ON THREADS.

2. REFER TO CAD FOR UNDEFINED GEOMETRY.

3. BEAD BLAST SURFACE TREATMENT.
4. ENSURE SPECIFIED TOLERANCES ARE MAINTAINED AFTER BLASTING.
5. PERFORM FINAL MACHINING ON CRITICAL FEATURES AFTER BLASTING IF REQUIRED.



PROJECT  
**REMORPH**

PART NAME  
**BZTB**

QUANTITY  
**1**

PROJ. ANG.

SIZE  
**A4**

SCALE  
**1:1**

LAST UPDATED  
**12 Dec. 24**