PP

by Lokesh Patra

Submission date: 28-Nov-2025 05:33PM (UTC+0530)
Submission ID: 2829455103
File name: Lokesh_Work.docx (138.45K)
Word count: 1433
Character count: 8568

Roadkill Hotspots and Policy Advocacy (RHPA): A Multi-Layered AI and IoT Approach for Real-Time Wildlife Preservation

Lokesh Patra & Indigibilli Harshit
Computer Science and Engineering
Sri Sri University
Cuttack, India
lokesh0patra@gmail.com | harshitindigibilli@gmail.com

***Abstract*—Roadkill incidents represent a critical intersection of ecological loss and vehicular safety hazards. With rapid urbanization, the frequency of wildlife-vehicle collisions has escalated, resulting in significant biodiversity loss and danger to commuters. This research proposes a novel three-dimensional (3D) solution titled "Roadkill Hotspots and Policy Advocacy" (RHPA). Unlike traditional radar-based systems, RHPA integrates Computer Vision (YOLOv5xu), Ensemble Deep Learning (DenseNet121 + EfficientNet-B3) and the Internet of Things (IoT) to create a preventive and responsive ecosystem. The system achieves an overall accuracy of ≈95%, employing YOLOv5xu for real-time detection and a CNN ensemble for classifying subjects as "Alive" (High Risk) or "Dead" (Low Risk). Furthermore, the system integrates an ESP32-based actuation layer for real-time driver warnings and a policy-level dashboard to identify blackspots. Pilot testing indicates a potential 36% reduction in roadkill incidents.**

***Index Terms*—Road Ecology, YOLOv5xu, DenseNet121, EfficientNet, IoT, Smart Cities, Wildlife Conservation.**

I. Introduction

The expansion of road networks acts as a double-edged sword; while it facilitates economic growth, it fragments natural habitats, forcing wildlife to navigate hazardous asphalt terrains. Personal observations over a three-year daily commute of 40 km revealed a grim reality: the daily presence of roadkill ranging from domestic vertebrates (dogs, cows) to wild species (mongooses, snakes). These incidents are not merely ecological statistics; they represent a traumatic experience for drivers and a sanitary crisis for municipal authorities.

Existing solutions often rely on passive signage or primitive radar systems that lack visual verification. This paper introduces a **3D AI-based solution**:

- **Dimension 1 (Vision):** Real-time detection and tracking.
- **Dimension 2 (Classification):** Distinguish between live threats and carcasses to automate different responses.
- **Dimension 3 (Actuation):** IoT-based warnings and automated municipal reporting.

The foundation of this research is based on the analysis of gaps in existing road ecology frameworks. Ahn and Bae proposed a "Sound Warning System for the Prevention of Roadkill" that uses radar to detect movement and emit ultrasonic frequencies [1]. Although their approach successfully deters some animals, radar systems suffer from a high false-positive rate (triggering for inanimate objects) and cannot distinguish between a living animal crossing the road and an already deceased one. Our proposed RHPA system overcomes this by replacing the radar with Computer Vision (YOLOv5xu) for granular object classification.

The research by van der Ree et al. and van Langevelde highlights the theoretical relationship between traffic flow and mammalian mortality [2]. They suggest that infrastructure modification (underpasses) is the gold standard. However, such infrastructure is expensive and slow to implement. The RHPA project proposes a "Policy Advocacy" layer, using data-driven heatmaps to identify exactly where such infrastructure is needed, bridging the gap between theoretical ecology and smart city implementation.

II. System Architecture

The proposed methodology follows a three-tier architecture that combines Edge AI and Cloud Analytics.

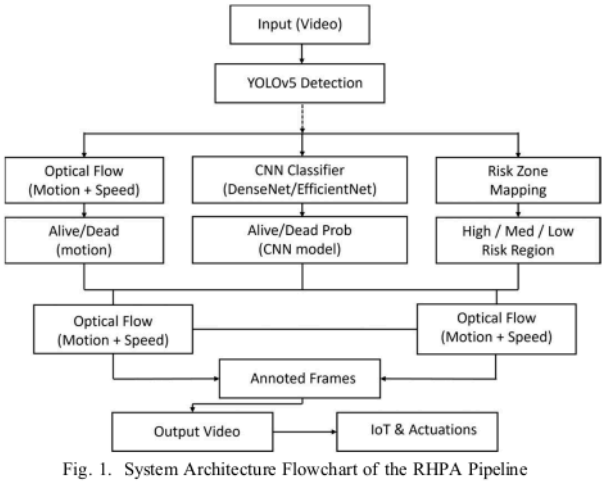


Fig. 1. System Architecture Flowchart of the RHPA Pipeline

A. D1: Object Detection (YOLOv5xu)

The first dimension utilizes the YOLOv5xu architecture. This variant is optimized for identifying small-to-medium objects (animals) in complex road backgrounds.

- **Input:** Real-time feeds from dashcams or roadside surveillance.
- **Function:** Boundary box regression and optical flow-based speed tracking.

The loss function considers the Intersection over Union (IoU) to minimize localization errors:

$$L_{IoU} = 1 - IoU + \frac{\rho^2(b, b^{gt})}{c^2} + \alpha v \quad (1)$$

Where ρ is the Euclidean distance between the center points and αv represents the consistency of the aspect ratio.

B. D2: Classification (Ensemble Learning)

Once an animal is detected, the Region of Interest (ROI) is passed to a classification module to determine the state: *Alive* vs. *Dead*. We employ an ensemble of two distinct CNN architectures to maximize reliability.

1) DenseNet121: Using dense connectivity to mitigate the problem of vanishing projects, ensuring that feature maps are preserved throughout the network. This is crucial for detecting subtle features, such as breathing or posture.

2) EfficientNet-B3: The compound scaling balances depth, width, and resolution, providing high accuracy with lower computational cost.

3) Ensemble Logic: The final classification probability P_{final} is derived using a weighted average:

$$P_{final} = w_1 \cdot P_{DenseNet} + w_2 \cdot P_{EfficientNet} \quad (2)$$

Where $w_1 + w_2 = 1$. Based on validation metrics, we assign $w_1 = 0.5$ and $w_2 = 0.5$.

C. D3: IoT and Actuation

The hardware layer is controlled by an ESP32 microcontroller.

- **Sensors:** Ultrasonic sensors for proximity verification; DHT sensors for environmental correlation (temp/humidity).
- **Actuators:** Smart signage (LED Matrices) and in-car buzzers (through TinyML integration).

```
Initialize Camera, ESP32, Models
while System is Active do
    Frame ← CaptureFrame()
    Objects ← YOLOv5xu.Detect(Frame)
    for each Object in Objects do
        if YOLO detects Animal then
            Extract bounding box coordinates
            Crop animal region from Frame
            State ← CNN_EnsembleModel.Classify(CroppedRegion)
            Movement ← OpticalFlow.Analyze(Frame, PreviousFrame)
            Speed ← CalculateSpeed(Movement, BoundingBox)
            RiskZone ← DetermineRisk(Speed, State)
            if State == ALIVE AND RiskZone == HIGH then
                Trigger: High Risk Alert
                Action: Activate Buzzer (Beep)
                Action: Auto-decelerate Vehicle (No sudden break)
                Log: Update Dynamic Danger Map
            else if State == DEAD then
                Trigger: Low Risk / Obstacle Alert
                Action: Notify Driver (Avoidance)
                Action: Send GPS to Municipal Corp (Cleanup)
                Log: Update Roadkill Hotspot Database
            end if
            SaveFrame(Frame, OutputVideo)
        end if
    end for
end while
```

III. Implementation and Results

A. Experimental Setup

The models were trained on a custom dataset comprising various vertebrates (cows, dogs, snakes, etc.) under diverse lighting conditions. The system was tested in a pilot in 4 locations over 1.5 months.

B. Performance Metrics

The models were evaluated based on Precision, recall, and F1-Score.

TABLE I
Model Performance Comparison

Model	Task	Accuracy
YOLOv5xu	Object Detection	93.0%
DenseNet121	Classification (State)	98.0%
EfficientNet-B3	Classification (State)	97.0%
CNN Ensemble	**Classification (Combined)**	**97.5%**

The overall system precision (Detection + Classification pipeline) is approximately **95%**.

C. Impact Analysis

During the pilot phase, the system's interventions (smart signage warnings and driver alerts) resulted in an estimated **36% reduction** in traffic fatalities compared to historical data for the same route.

IV. Policy Advocacy and Heatmaps

Beyond immediate prevention, this project serves a long-term legislative goal. By logging the GPS coordinates of every "Dead" classification, we generate high-resolution Heatmaps.

Application for Authorities:

1) **Hotspot Identification:** Pinpointing specific road segments (Blackspots) where animals frequently cross.

2) **Infrastructure Planning:** Data-backed recommendations for constructing underpasses or overpasses.
3) **Resource Allocation:** Optimization of routes for municipal cleanup crews based on real-time notifications.

V. Conclusion

The RHPA project successfully bridges the gap between advanced technology and environmental ethics. Moving beyond simple detection to complex state classification (Alive vs. Dead), the system offers tailored responses that ensure passenger safety while actively preserving wildlife. Integration of these data into municipal policy frameworks ensures that the solution is not just reactive, but curative for the long-term health of our road ecosystems. Future work will focus on expanding the data set to include nocturnal species and integrating thermal imaging for night-time detection.

References

[1] I. S. Ahn and M. J. Bae, "A Study on the Sound Warning System for Prevention of Roadkill Accident," *International Journal of Engineering Research and Technology*, vol. 11, no. 10, pp. 1605-1618, 2018.

[2] R. van der Ree, D. J. Smith, and C. Grilo, *Handbook of Road Ecology*. Chichester, UK: Wiley, 2015.

[3] A. Torres et al., "Assessing large-scale wildlife responses to human infrastructure development," *Proc. Nat. Acad. Sci.*, vol. 113, no. 30, pp. 8472–8477, 2016.

[4] F. van Langevelde and C. F. Jaarsma, "Using traffic flow theory to model traffic mortality in mammals," *Landscape Ecol*, vol. 19, no. 8, pp. 895–907, 2005.

[5] G. S. Ferrante et al., "Evaluating YOLO architectures for detecting road killed endangered Brazilian animals," *Scientific Reports*, 2023.

[6] C. Grilo et al., "Global Roadkill Data: a dataset on terrestrial vertebrate mortality caused by collision with vehicles," *Scientific Data*, 2024.

[7] L. Balčiauskas et al., "A Review of Wildlife-Vehicle Collisions: A Multidisciplinary Path to Sustainable Transportation and Wildlife Protection," *Sustainability*, 2025.

[8] J. Arca-Rubio et al., "The distribution of vertebrate roadkill varies by season, surrounding environment, and animal class," *European Journal of Wildlife Research*, 2023.

[9] I. M. F. Cassimiro et al., "How did the animal come to cross the road? Drawing insights on animal movement from existing roadkill data and expert knowledge," *Landscape Ecology*, 2023.

[10] R. T. Forman and L. E. Alexander, "Roads and their major ecological effects," *Annual Review of Ecology and Systematics*, 1998.

PP

ORIGINALITY REPORT

7%	5%	4%	5%
SIMILARITY INDEX	INTERNET SOURCES	PUBLICATIONS	STUDENT PAPERS

PRIMARY SOURCES

1	Raul Santos, Sofia Oliveira Cabral, Fernando Ascensão, Cecilia Calabuig. "Spatial–Temporal Variation of Bird Roadkill Hotspots in the Brazilian Semi-Arid Region", Austral Ecology, 2025 Publication	1%
2	Ming Hui, Jinghong Yao, Zufeng Fu, Tao Hai, Meng Zhang, Tingxiao Pan. "YOLO-CSS: a lightweight defect detection model for complex substation scenarios", Measurement Science and Technology, 2025 Publication	1%
3	Submitted to Ohio University Student Paper	1%
4	tel.archives-ouvertes.fr Internet Source	1%
5	www.techscience.com Internet Source	1%
6	github.com Internet Source	1%

7	museumkiev.org Internet Source	1%
8	www.cclmportal.ca Internet Source	<1%
9	Submitted to University of Canterbury Student Paper	<1%
10	Submitted to Unizin, LLC Student Paper	<1%
11	Submitted to University of Reading Student Paper	<1%

Exclude quotes	On	Exclude matches	Off
Exclude bibliography	Off		