

Appendix A

Certified Copy of Prosecution History of U.S. Patent No.
8,016,348

8718772



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

**UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office**

July 2, 2026

**THIS IS TO CERTIFY THAT ANNEXED IS A TRUE COPY FROM THE
RECORDS OF THIS OFFICE OF THE FILE WRAPPER AND CONTENTS
OF:**

APPLICATION NUMBER: 12/508,901

FILING DATE: July 24, 2009

PATENT NUMBER: 8,016,348

ISSUE DATE: September 13, 2011

**By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office**

Shakena Harrison

**Shakena Harrison
Certifying Officer**



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ATTY DOCKET NO.: 4362-138IP

DATE: July 24, 2009

**UTILITY PATENT APPLICATION TRANSMITTAL LETTER
AND FEE TRANSMITTAL FORM (37 CFR § 1.53(b)) FOR ELECTRONIC FILING**

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Transmitted herewith for filing under 37 CFR § 1.53(b) is:

- ☒ a patent application
☐ a Continuation ☐ a Divisional ☒ a Continuation-in-Part (CIP) Application of
prior application no.: 12/276,567; filed November 24, 2008, the disclosure of which is
incorporated herein by reference in its entirety.
☐ and claims the benefit of Provisional Application No. _____; filed _____.

Inventor(s) or Application Identifier: D. Stephen Hoffman and Marcus L. Murphy

Entitled: **RECIPROCATING SEATING UNIT WITH POWER ACTUATOR**

Correspondence Address: **Customer No. 20792**
Myers Bigel Sibley & Sajovec, P.A.
P. O. Box 37428
Raleigh, North Carolina 27627
Telephone: (919) 854-1400
Facsimile: (919) 854-1401

Attached (or filed concurrently herewith) are:

1. ☒ Application Transmittal Letter and Fee Transmittal Form.
2. ☒ **19** pages of Specification (including 15 claims)
3. ☒ **8** sheets of Formal Drawings (35 USC 113)
4. ☐ Oath or Declaration
 - a. ☐ newly executed (*copy*)
 - b. ☐ copy from prior application (37 CFR 1.63(d) (*for continuation/divisional*) [Note Box 6 Below]
 - c. ☐ **DELETION OF INVENTOR(S)** (*Signed statement deleting inventor(s) named in the prior application*)
5. ☐ Application Data Sheet. See 37 CFR 1.76
6. ☐ Incorporation By Reference (*useable if box 4b is checked*)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
7. ☐ Microfiche Computer Program (*Appendix*)
8. ☒ Applicant claims small entity status. See 37 CFR § 1.27.
9. ☐ Information Disclosure Statement, listing of references, and _____ references cited.
10. ☐ Preliminary Amendment (*Please enter all claim amendments prior to calculating the filing fee.*)

11. ☐ English Translation Document
 12. ☐ Certified Copy of _____ Application will follow by mail.
 13. ☐ Sequence Listing/ Sequence Listing text file.
 14. ☐ Deletion of Inventor(s) (Signed statement attached deleting inventor(s) name in the prior application. See 37 CFR 1.63(d)(2) and 1.33(b).)
 15. ☐ Nonpublication Request under 35 U.S.C. 122(b)(2)(B)(i). Applicant must attach form.
 16. ☐ Other:


The fee has been calculated as shown below:

	Column 1 No. Filed	Column 2 No. Extra	Small Entity Rate Fee	Large Entity Rate Fee
TOTAL CLAIMS	15 - 20 = 0	0	* 26 = \$	* 52 = \$
INDEP CLAIMS	2 - 3 = 0	0	* 110 = \$	* 220 = \$
FILING FEE			\$ 82.00	\$330.00
SEARCH FEE			\$270.00	\$540.00
EXAMINATION FEE			\$110.00	\$220.00
☐ MULTIPLE Dependent Claims Presented			+ 195 = \$	+ 390 = \$
☐ NON-ENGLISH SPECIFICATION			+ 130 = \$	+ 130 = \$
If the difference in Col. 1 is less than zero, Enter "0" in Col. 2			Total \$462.00	Total \$0.00

EFS APPLICATION SIZE FEE	Total number of pages @ .75 rate	Extra page units (rounded up, per 50)	Small Entity Rate Fee	Large Entity Rate Fee
	_____ * .75 = _____ - 100 = _____	0	* 135 = \$	* 270 = \$.00

- ☐ Please charge my Deposit Account No. 50-0220 in the amount of \$462.00.
☒ The Commissioner is hereby authorized to credit overpayments or charge the appropriate fees associated with this communication to Deposit Account No. 50-0220.

Respectfully submitted,


 James R. Cannon
 Registration No. 35,839

CERTIFICATION OF TRANSMISSION

I hereby certify that this correspondence is being transmitted via the Office electronic filing system in accordance with § 1.6(a)(4) to the U.S. Patent and Trademark Office on July 24, 2009.

Signature: _____


 Cara L. Rose

RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

Related Application

[0001] This application is a continuation-in-part of U.S. Patent Application No. 12/276,567, filed November 24, 2008, the disclosure of which is hereby incorporated herein in its entirety.

Field of the Invention

[0002] This invention relates generally to seating units, and relates more particularly to reclining seating units with rocking capability.

Background of the Invention

[0003] Recliner chairs and other reclining seating units have proven to be popular with consumers. These seating units typically move from an upright position, in which the backrest is generally upright, to one or more reclined positions, in which the backrest pivots to be less upright. The movement of the seating unit between the upright and reclined positions is typically controlled by a pair of matching reclining mechanisms that are attached to the seat, backrest and base of the chair.

[0004] In recent years, furniture designers have looked for alternatives to rocking chairs that can provide a similarly relaxing repetitive motion. One alternative has been the gliding chair, or "glider", which includes structure that enables the seat portion of the chair to "glide" forwardly and rearwardly relative to its base to mimic generally the rocking motion of a rocking chair. Often the gliding structure comprises a set of swing links (usually two at the front

of the chair, and two at the rear) that are pivotally attached at their upper ends to the base and extend downwardly therefrom to attach to a structure, such as a mounting bracket, that is attached to the seat. In this configuration, the seat is suspended from the base and is free to swing forwardly and rearwardly in a double pendulum-type motion in response to a forwardly or rearwardly-directed force applied by a seated occupant. The gliding path of the chair is controlled by the configuration and mounting of the swing links. These chairs can be constructed to resemble traditional rocking chairs and thus are quite popular.

[0005] Reclining capability has been combined with gliding capability in a single unit to provide a chair that both reclines and glides. This chair includes a reclining mechanism that enables it to move between upright and one or more reclined positions, and further includes the aforementioned swing links attached between the base and the seat, armrests, or mechanism itself to enable the chair to glide. Examples of such chairs are illustrated and described in U.S. Patent Nos. 4,536,029 and 4,544,201, both to Rogers, Jr., the disclosures of which are hereby incorporated herein by reference in their entireties.

[0006] Although they are already popular seating units, it may be desirable to provide additional functionality to glider-recliners.

Summary of the Invention

[0007] As a first aspect, embodiments of the present invention are directed to a reciprocating and reclining seating unit. The seating unit comprises: a base unit with a first bearing surface; a generally horizontally-disposed seat positioned above the base; a generally upright backrest positioned above the base and substantially rearward of the seat; an extendable ottoman; a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links; a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and a power actuating unit attached to the reclining mechanism, the actuating unit configured to move the chair between (a) an upright position, in which the seat is generally horizontally disposed, the

backrest is generally vertically disposed, and the ottoman are generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases. The actuating unit is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across the seating unit and first and second projections fixed to the cross-member. The first projection is pivotally attached to the actuating unit. The second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.

[0008] As a second aspect, embodiments of the present invention are directed to a reciprocating and reclining seating unit, comprising: a base unit with a first bearing surface; a generally horizontally-disposed seat positioned above the base; a generally upright backrest positioned above the base and substantially rearward of the seat; an extendable ottoman; a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links; a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and a power linear actuating unit attached to the reclining mechanism, the actuating unit including a motor and an extendable rod and configured to move the chair between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman are generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases. The actuating unit is attached to an actuating mechanism, the actuating mechanism comprising: a cross-member extending transversely across the seating unit; and first

and second projections fixed to the cross-member. The first projection is pivotally attached to the actuating unit. The second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism. The actuating unit includes opposed first and second ends, wherein the first end of the actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

Brief Description of the Figures

[0009] **Figure 1** is a perspective view of a glider-recliner chair according to embodiments of the present invention.

[0010] **Figure 2** is a side section view of the chair of **Figure 1** with the chair in its fully upright position.

[0011] **Figure 2A** is an enlarged side section view of the actuating mechanism of the chair of **Figure 1** with the chair in its fully upright position.

[0012] **Figure 3** is a side section view of the chair of **Figure 1** with the chair in its TV position.

[0013] **Figure 3A** is an enlarged side section view of the actuating mechanism of the chair of **Figure 1** with the chair in its TV position.

[0014] **Figure 4** is a side section view of the chair of **Figure 1** with the chair in its fully reclined position.

[0015] **Figure 4A** is an enlarged side section view of the actuating mechanism of the chair of **Figure 1** with the chair in its fully reclined position.

[0016] **Figure 5** is a top cutaway view of the frame of the chair of **Figure 1**.

Detailed Description of Embodiments of the Invention

[0017] The present invention now is described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. This

Attorney Docket No. 4362-138IP

invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0018] Like numbers refer to like elements throughout. In the figures, the thickness of certain lines, layers, components, elements or features may be exaggerated for clarity. Broken lines illustrate optional features or operations unless specified otherwise.

[0019] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. As used herein, phrases such as "between X and Y" and "between about X and Y" should be interpreted to include X and Y. As used herein, phrases such as "between about X and Y" mean "between about X and about Y." As used herein, phrases such as "from about X to Y" mean "from about X to about Y."

[0020] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the specification and relevant art and should not be interpreted in an idealized or overly formal sense unless expressly so defined herein. Well-known functions or constructions may not be described in detail for brevity and/or clarity.

[0021] It will be understood that when an element is referred to as being "on", "attached" to, "connected" to, "coupled" with, "contacting", etc., another element, it can be directly on, attached to, connected to, coupled with or contacting the other element or

intervening elements may also be present. In contrast, when an element is referred to as being, for example, "directly on", "directly attached" to, "directly connected" to, "directly coupled" with or "directly contacting" another element, there are no intervening elements present. It will also be appreciated by those of skill in the art that references to a structure or feature that is disposed "adjacent" another feature may have portions that overlap or underlie the adjacent feature.

[0022] This invention is directed to seating units that have a stationary base, a seat portion, and a backrest. As used herein, the terms "forward", "forwardly", and "front" and derivatives thereof refer to the direction defined by a vector extending from the backrest toward the seat parallel to the underlying surface. Conversely, the terms "rearward", "rearwardly", and derivatives thereof refer to the direction directly opposite the forward direction; the rearward direction is defined by a vector that extends from the seat toward the backrest parallel to the underlying surface. The terms "lateral," "laterally", and derivatives thereof refer to the direction parallel with the floor, perpendicular to the forward and rearward directions, and extending away from a plane bisecting the seating units between their armrests. The terms "medial," "inward," "inboard," and derivatives thereof refer to the direction that is the converse of the lateral direction, i.e., the direction parallel with the floor, perpendicular to the forward direction, and extending from the periphery of the seating units toward the aforementioned bisecting plane.

[0023] The seating units illustrated and described herein comprise a plurality of pivotally interconnected links. Those skilled in this art will appreciate that the pivots between links can take a variety of configurations, such as pivot pins, rivets, bolt and nut combinations, and the like, any of which would be suitable for use with the present invention. Also, the shapes of the links may vary as desired, as may the locations of certain of the pivots. Moreover, in some instances combinations of pivot points may be replaced by equivalent structures, such as "slider-crank" configurations, like those described in B. Paul, Kinematics and Dynamics of Planar Machinery 4-21 (1979). In other embodiments, another mechanism that provides reciprocating motion along a longitudinal path, such as a rocking unit like that discussed in co-assigned and co-pending U.S. Patent Application Serial No. 12/276,559, the disclosure of which is hereby incorporated herein in its entirety, may also be employed.

[0024] Referring now to the figures, a swiveling glider-recliner chair, designated broadly at **10**, is illustrated in **Figures 1-5**. The chair **10** includes a base unit **11**, a seat **13** that is generally horizontally disposed above the base unit **11**, a backrest **15** that is generally vertically and disposed substantially above a rear portion of the seat **13**, and two ottomans **17a**, **17b**, which, in the upright position of **Figure 1**, are generally vertically disposed below a front portion of the seat **13**. Arms **18** are positioned on either side of the seat **13** and move in concert with the seat **13**.

[0025] A pair of mirror image reclining mechanisms **30** (only one of which is shown herein in **Figures 2-4**) are attached to the backrest **15**, the seat **13**, and the ottomans **17a**, **17b**. The reclining mechanisms **30**, which comprise a plurality of interconnected links, move the chair **10** between (a) an upright position (**Figures 1 and 2**), in which the seat **13** is generally horizontally disposed, the backrest **15** is generally vertically disposed, and the ottomans **17a**, **17b** are generally vertically disposed and positioned below the seat **13**, (b) an intermediate TV position (**Figure 3**), in which the ottomans **17a**, **17b** are generally horizontally disposed in front of the seat **13** and the backrest **15** and the seat **13** substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position (**Figure 4**), in which the angle between the backrest **15** and the seat **13** increases. These components are described in greater detail below.

[0026] The base unit **11** includes a circular lower base **12**. A swivel unit **14** is mounted onto the top of the lower base **12**. Cross-members **18** are mounted atop the swivel unit **14**. Those skilled in this art will recognize that the base unit **11** may take other forms that provide mounting locations for the remaining components of the chair **10**; for example, the swivel unit **14** may be omitted.

[0027] Glide foundation plates **24** are mounted to the top surfaces of the cross-members **18**. A front glide link **20** is attached at a pivot **21** to the front end of the glide foundation plate **24**, and a rear glide link **25** is attached at a pivot **26** to the rear end of the glide foundation plate **24**. The front and rear glide links **20**, **25** are suspended from the glide foundation plate **24** and together form a gliding mechanism **28** that provides a gliding motion to the chair **10** when it is in its upright position (**Figure 2**). Those skilled in this art will appreciate

that the gliding mechanism may take other forms; it may include glide links of different shapes, or it may include a "track"- based gliding mechanism.

[0028] Because the reclining mechanisms 30 are mirror images of each other, only one reclining mechanism will be described in detail herein, with the understanding that the discussion is equally applicable to the mirror image mechanism 30. Also, for clarity the mechanism will be described first with reference to **Figure 4** (with the mechanism 30 in its reclined position), then will be described in its upright and TV positions.

[0029] Turning now to **Figure 4**, the reclining mechanism 30 includes a generally arcuate foundation link 31, which is attached at either end to the front and rear glide links 20, 25 at pivots 22, 27, respectively. A generally crescent-shaped mounting bracket 32 is fixed to the foundation link 31. A slot 32a is present at the front end of the mounting bracket 32. An L-shaped lower swing link 34 is attached to a lower region of the mounting bracket 32 at a pivot 36 and extends upwardly and rearwardly, then upwardly and forwardly therefrom. A straight upper swing link 38 is attached at its lower end to the upper end of the lower swing link 34 at a pivot 40 and extends upwardly therefrom.

[0030] A backpost 48 is fixed to the backrest 15 and extends generally forwardly from the lower front end of the backrest 15. The upper swing link 38 is attached to a forward portion of the backpost 48 at a pivot 50. A straight coupling link 52 having a slot 52a is attached to the backpost 48 via a pin 48a located forwardly of the pivot 50. The coupling link 52 extends forwardly and downwardly from the pin 48a to attach to the front end of the mounting bracket 32 via a pin 52b inserted into a slot 32a in the mounting bracket 32. A trapezoidal sequencer plate 54 is attached to the backpost 48 at a pivot 58, and also interacts with the backpost 48 via a slot 54a that receives a pin 48b. The sequencer plate 54 is also attached to the rear end of the mounting bracket 32 at a pivot 56.

[0031] Still referring to **Figure 4**, a seat frame 62, to which the arms 18 are mounted, underlies the seat 13. A seat adapter 66 is fixed to the seat frame 62. The seat adapter 66 is attached to the backpost 48 at a pivot 68 that is located just rearward of the pivot 50. An upper ottoman swing link 72 is attached to a front region of the seat adapter 66 at a pivot 74 and extends downwardly and forwardly therefrom. A tripartite lower ottoman swing link 76 is

attached to a pivot 78 that is located rearwardly and downwardly from the pivot 74; the lower ottoman swing link 76 extends generally forwardly from the pivot 78. An upper ottoman extension link 80 is attached to the forward end of the lower ottoman swing link 76 at a pivot 82 and extends forwardly and upwardly therefrom. Also the upper ottoman extension link 80 is attached to the upper ottoman swing link at a pivot 84. A lower ottoman extension link 86 is attached to the forward end of the upper ottoman swing link at a pivot 88 that is positioned above and forward of the pivot 84 and extends upwardly and forwardly therefrom generally parallel with the upper ottoman extension link. An outer ottoman bracket 90 is generally horizontally disposed and is attached to the upper and lower ottoman extension links 80, 86 at pivots 92, 94 respectively. The ottoman 17a is mounted on the outer ottoman bracket 90.

[0032] A bi-angled inner ottoman bracket 96 is attached at its lower, forward end to the lower ottoman extension link 86 at a pivot 98. At its opposite end, the inner ottoman bracket 96 supports the ottoman 17b. The inner ottoman bracket 96 also includes a slot 96a that receives a pin 80a located on the upper ottoman extension link 80.

[0033] A connecting link 100 is attached to the sequencer plate 54 at a pivot 102. The connecting link 100 extends forwardly and slightly upwardly from the pivot 102 to a pivot 104 with the lower ottoman swing link 76.

[0034] A locking mechanism 130 is attached to the reclining mechanism 30 to prevent gliding of the chair 10 when it is in the TV or fully reclined positions. The locking mechanism 130 includes a drive link 132 that is pivotally interconnected at one end to the sequencer plate 54 at a pivot 134. The drive link 132 is a straight link that slopes downwardly and slightly forwardly from the pivot 134. The opposite end of the drive link 132 is pivotally interconnected with a downwardly-extending projection 138 of a hook-shaped locking link 136 at a pivot 140. The locking link 136 is attached to the mounting bracket 32 at the pivot 36.

[0035] Referring to **Figure 4A**, The chair 10 includes a power unit 112 that drives the chair 10 between its upright, TV and fully reclined positions. The power unit 112 includes a motor unit 114, to which is attached a sleeve 116. The sleeve extends rearwardly from the motor unit 114 and receives a retractable rod 118. The motor unit 114 is electrically connected with an

actuator (not shown), such as a toggle switch or the like, that energizes the motor unit 114 upon actuation.

[0036] The motor unit 114 is attached to an actuating mechanism 113 that includes a mounting bracket 110 at a pivot 120 via a mounting tab 114a (see Figure 5). The mounting bracket 110 is then attached to a cross-member 108 that extends between the reclining mechanisms 30. A bracket 106 is fixed to each of the lower ottoman swing links 76 and to the cross-member 108.

[0037] The rod 118 of the power unit 112 is attached to a projecting bracket 46 of the actuating unit 113 (Figures 4, 4A and 5) at a pivot 122. The bracket 46 is then attached to a Z-shaped cross-member 44 that extends between the reclining mechanisms 30. The cross-member 44 is fixed to a second projecting bracket 42 that is pivotally attached to the lower swing link 34 of each reclining mechanism 30 at a pivot 140.

[0038] As can be seen in Figure 2A, in the upright position, the rod 118 of the power unit 112 is retracted into the sleeve 116. In this position, the "internal leg" of the Z-shaped cross-member 44 is disposed at an angle α of approximately 45 degrees to horizontal, such that both of the pivots 40, 140 are positioned below the axis A defined by the rod 118 of the power unit 112. The upper segment of the lower swing link 34 is generally parallel with the axis A.

[0039] Because the rod 118 is in its retracted position, a pantographic linkage formed by the upper and lower ottoman swing links 72, 76 and the upper and lower ottoman extension links 80, 86 is folded under the seat frame 62, which positions the ottoman 17b underneath a forward portion of the seat frame 62 and the ottoman 17a just forward of and below the seat frame 62 in a vertical orientation. Also, the lower and upper swing links 34, 38 are oriented such that the upper segment of the lower swing link 34 is generally horizontal, which positions the backpost 48 and, in turn, the backrest 15, in a generally upright position.

[0040] Additionally, the sequencer plate 54 is oriented such that the pivot 102 is located downwardly and rearwardly, such that the locking link 136 of the locking mechanism 130 is raised, with a pocket 137 formed at the vertex of the locking link 136 facing downwardly and positioned above a post 139 on the rear glide link 25. In this position, the front and rear glide links 20, 25 are free to swing on the pivots 21, 26, thereby enabling the reclining

mechanisms 30, the seat 13, the backrest 15 and the ottomans 17a, 17b to move fore-and-aft relative to the base unit 11. During the gliding motion, the majority of the locking mechanism 130 is stationary relative to the reclining mechanisms 30. Because the locking link 136 does not move relative to the reclining mechanism 30 as the chair 10 glides, it does not interact with the post 139 to impede the gliding motion.

[0041] To move the chair 10 from the upright position to the TV position of **Figure 3**, an occupant of the chair 10 actuates the actuator, which causes the rod 118 to begin to extend from the sleeve 116. Extension of the rod 118 attempts to force the lower swing link 34 to rotate slightly counterclockwise (from the vantage point of **Figures 2 and 3**) about the pivot 36. However, the weight of the seated occupant and the geometry of the lower swing link 34, the upper swing link 38, and the actuation mechanism 113 prevent any substantial rotation of the lower swing link 34 at this point. Because there is little to no fore-and-aft movement of the rear end of the rod 118, the motor unit 114 moves forwardly relative to the base unit 11, thereby driving the lower ottoman swing link 76 counterclockwise about the pivot 78. Rotation of the lower ottoman swing link 76 forces the upper ottoman extension link 80 forward, which in turn draws the upper ottoman swing link 72 counterclockwise around the pivot 74. Also, the lower ottoman extension link 86 moves forwardly more than the upper ottoman extension link 80, such that the outer ottoman bracket 90 and the inner ottoman bracket 96 rotate counterclockwise (rotation of the inner ottoman bracket 96 causes the pin 80a to move in the slot 96a toward the pivot 98). The rotation of the outer and inner ottoman brackets 90, 96 induces the ottomans 17a, 17b to rotate from a vertical orientation to a horizontal orientation. Motion of the ottomans 17a, 17b ceases when a pin 72a on the upper ottoman swing link 72 strikes the upper edge of the upper ottoman extension link 80.

[0042] In addition, the rotation of the lower ottoman swing link 76 draws the connecting link 100 forward. Movement of the connecting link 100 rotates the sequencer plate 54 counterclockwise about the pivot 58 with the backpost 48. The drive link 132 of the locking mechanism 130 is driven down and rotates the locking link 136 counterclockwise. The movement of the locking link 136 ceases when the pocket 137 of the locking link 136 descends sufficiently to receive the post 139 on the rear glide link 25. In this position, relative movement

between the front and rear glide links 20, 25 and the reclining mechanisms is restrained, thereby preventing the reclining mechanisms 30, and in turn the chair 10, from gliding relative to the base unit 11.

[0043] Rotation of the sequencer plate 54 and movement of the connecting link 100 also lower the backpost 48 relative to the base unit 11, which forces the seat link 64 to increase in pitch angle relative to its underlying surface. The upper swing link 38 rotates counterclockwise about the pivot 48 as a result.

[0044] To move the chair 10 from the TV position of Figure 3 to the fully reclined position of Figure 4, the occupant can continue to operate the actuator, which extends the rod 118 farther out of the sleeve 116. When the ottomans 17a, 17b are fully extended, the pivots 82, 84 and 88 are in a near "over-center" condition that helps to lock the ottomans 17a, 17b in an extended position. Thus, as the rod 118 continues to extend from the sleeve 116 when the chair is in the TV position, the motor unit 114 cannot move forward relative to the base unit 11 any farther, so the rear end of the rod 118 overcomes the resistance provided by the occupant's weight and the geometry of the actuating mechanism 113 and the lower and upper swing links 34, 38 and begins to move rearwardly relative to the base unit 11, resulting in counterclockwise rotation of the lower swing link 34 about the pivot 36. This rotation drives the upper swing link 38 clockwise about the pivot 36. Thus, this action causes the angle β defined by the pivots 36, 40, 50 to increase. The rotation of the upper swing link 38 drives the forward end of the backpost 48 upward. As a consequence, the backpost 48 rotates counterclockwise about the pivot 58 relative to the sequencer plate 54 (and to the seat adapter 66 and the seat frame 62). Rotation of the backpost 48 and, in turn, the backrest 15, continues until (a) the pin 48b on the backpost 48 reaches the upper end of the slot 54a in the sequencer plate 54 and (b) the pin 52b of the coupling link 52 reaches the rear end of the slot 32a of the mounting bracket 32. In this position, the backrest 15 has reclined relative to the seat 13 at a greater angle than in the upright and TV positions.

[0045] The rotation of the lower swing link 34 and of the coupling link 52 also causes the seat 15 to rise relative to the base unit 11.

[0046] As can also be seen in **Figure 4**, the locking mechanism **130** continues to prevent the chair **10** from gliding as the chair **10** moves to the fully reclined position. It can also be seen that the seat **13** rises during movement from the TV position to the fully reclined position.

[0047] The chair **10** can be returned to its TV position from the fully reclined position by the occupant operating the actuator in the reverse direction. Because of the over-center condition of the pivots **82, 84, 88**, the ottomans **17a, 17b** remain extended, such that retraction of the rod **118** draws the backrest **15** to its upright position. Once the motion of the backrest **15** is complete, the over-center condition of the pivots **82, 84** and **88** can be overcome, and the ottomans **17a, 17b** are able to retract to the upright position.

[0048] Those skilled in this art will recognize that other variations of the chair **10** are contemplated in connection with the present invention. For example, the power unit **112** may be reversed, such that the motor **114** is at the rear end of the power unit **112** and the rod **118** is at the front end. In such a case, the rod **118** would extend forwardly relative to the base unit **11** as the chair **10** moved from the upright position to the TV position, and the motor **114** would move rearwardly relative to the base unit **11** when the chair moved from the TV position to the fully reclined position. In either instance, the front end of the power unit **112** moves relative to the base unit **11** during the movement from the upright to the TV position, and the rear end of the power unit moves relative to the base unit **11** during the movement from the TV to the fully reclined position.

[0049] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as recited in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

That Which is Claimed is:

1. A seating unit, comprising:
 - a base unit with a first bearing surface;
 - a generally horizontally-disposed seat positioned above the base;
 - a generally upright backrest positioned above the base and substantially rearward of the seat;
 - an extendable ottoman;
 - a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;
 - a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and
 - a power actuating unit attached to the reclining mechanism, the actuating unit configured to move the chair between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman are generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;
- wherein the actuating unit is attached to an actuating mechanism, the actuating mechanism comprising:
 - a cross-member extending transversely across the seating unit;
 - first and second projections fixed to the cross-member;
 - wherein the first projection is pivotally attached to the actuating unit; and
 - wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.

Attorney Docket No. 4362-138IP

2. The seating unit defined in Claim 1, wherein the reclining mechanism includes a pantographic linkage on which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between links of the pantographic linkage form a near over-center arrangement that locks the ottoman in position.

3. The seating unit defined in Claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.

4. The seating unit defined in Claim 1, wherein the power actuating unit includes opposed first and second ends, and wherein the first end of the power actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the power actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

5. The seating unit defined in Claim 4, wherein the upper swing link is pivotally attached with the backrest.

6. The seating unit defined in Claim 4, wherein the power actuating unit includes a motor and an extendable member at the first and second ends.

7. The seating unit defined in Claim 1, wherein the seat rises in moving from the TV position to the fully reclined position.

8. The seating unit defined in Claim 1, wherein the reclining mechanism includes a backpost that is fixed relative to the backrest, a mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat and pivotally attached to the backpost.

Attorney Docket No. 4362-138IP

9. The seating unit defined in Claim 6, wherein the lower swing link is angled, and wherein a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions.

10. The seating unit defined in Claim 9, wherein a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions.

11. The seating unit defined in Claim 10, wherein the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle.

12. The seating unit defined in Claim 1, wherein the reciprocating mechanism is a gliding mechanism.

13. A reciprocating and reclining seating unit, comprising:
a base unit with a first bearing surface;
a generally horizontally-disposed seat positioned above the base;
a generally upright backrest positioned above the base and substantially rearward of the seat;
an extendable ottoman;
a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;
a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism

to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and

a power linear actuating unit attached to the reclining mechanism, the actuating unit including a motor and an extendable rod and configured to move the chair between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman are generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;

wherein the actuating unit is attached to an actuating mechanism, the actuating mechanism comprising:

a cross-member extending transversely across the seating unit;

first and second projections fixed to the cross-member;

wherein the first projection is pivotally attached to the actuating unit; and

wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism; and

wherein the actuating unit includes opposed first and second ends, and wherein the first end of the actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

14. The seating unit defined in Claim 13, wherein a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions.

Attorney Docket No. 4362-138IP

15. The seating unit defined in Claim 14, wherein in the upright and TV positions, the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle.

RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

Abstract of the Disclosure

A reciprocating and reclining seating unit includes: a base unit with a first bearing surface; a generally horizontally-disposed seat positioned above the base; a generally upright backrest positioned above the base and substantially rearward of the seat; an extendable ottoman; a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links; a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and a power actuating unit attached to the reclining mechanism, the actuating unit configured to move the chair between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman are generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases. The actuating unit is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across the seating unit and first and second projections fixed to the cross-member. The first projection is pivotally attached to the actuating unit. The second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.

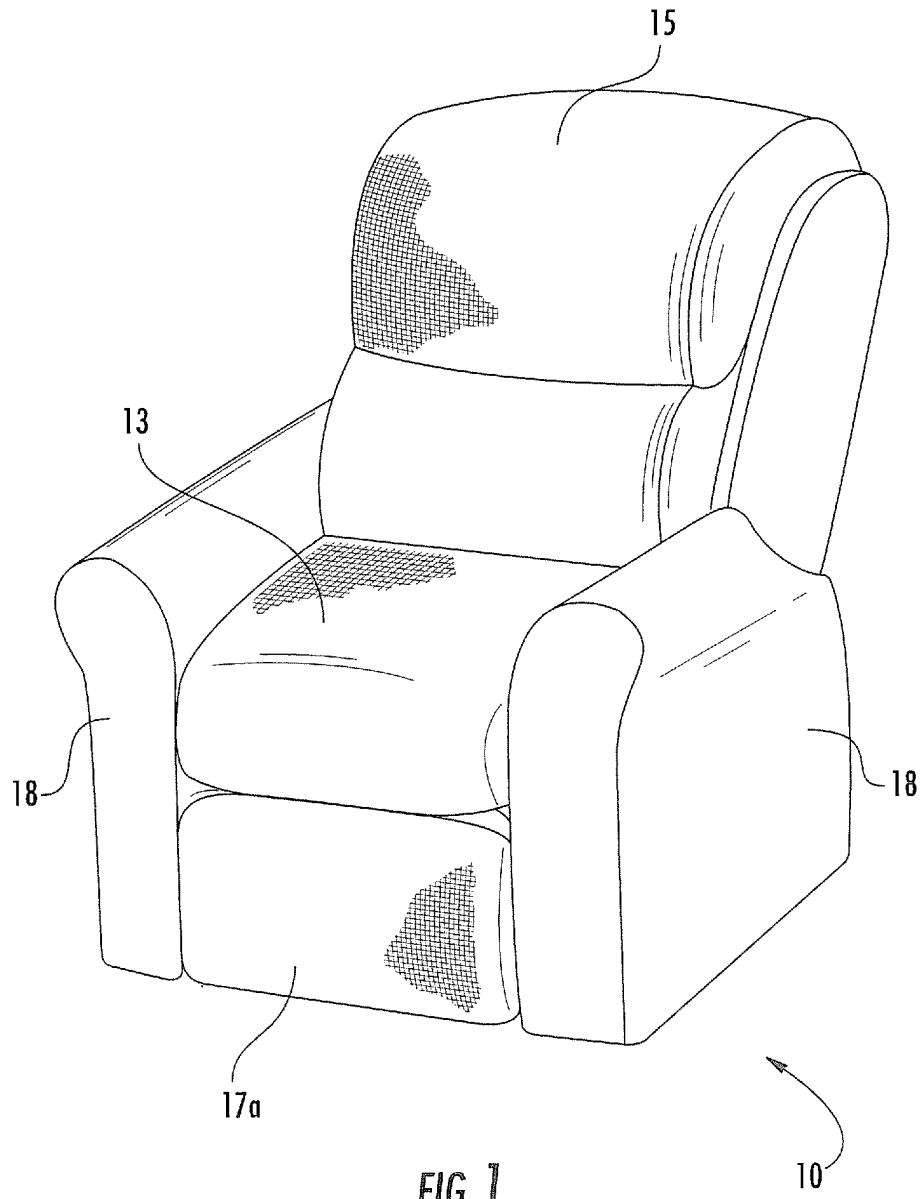


FIG. 1

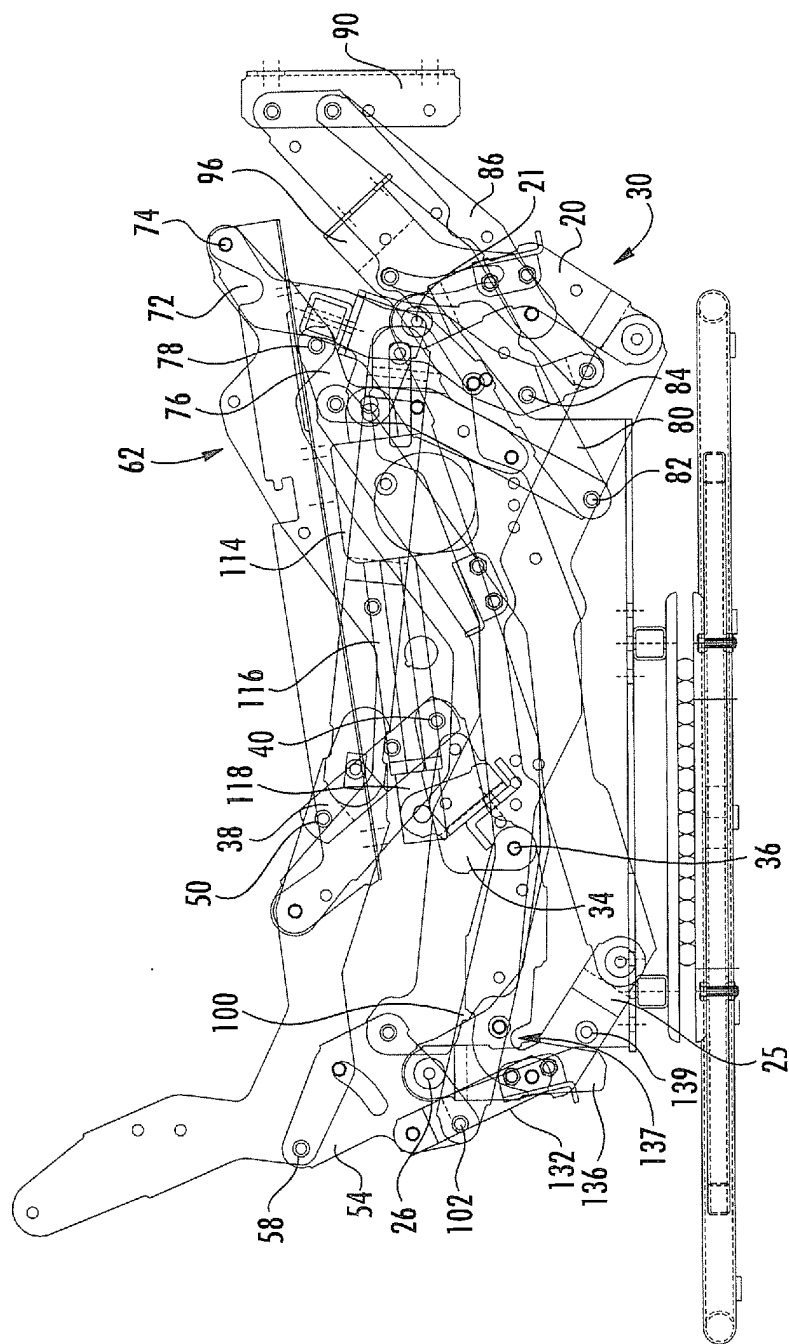
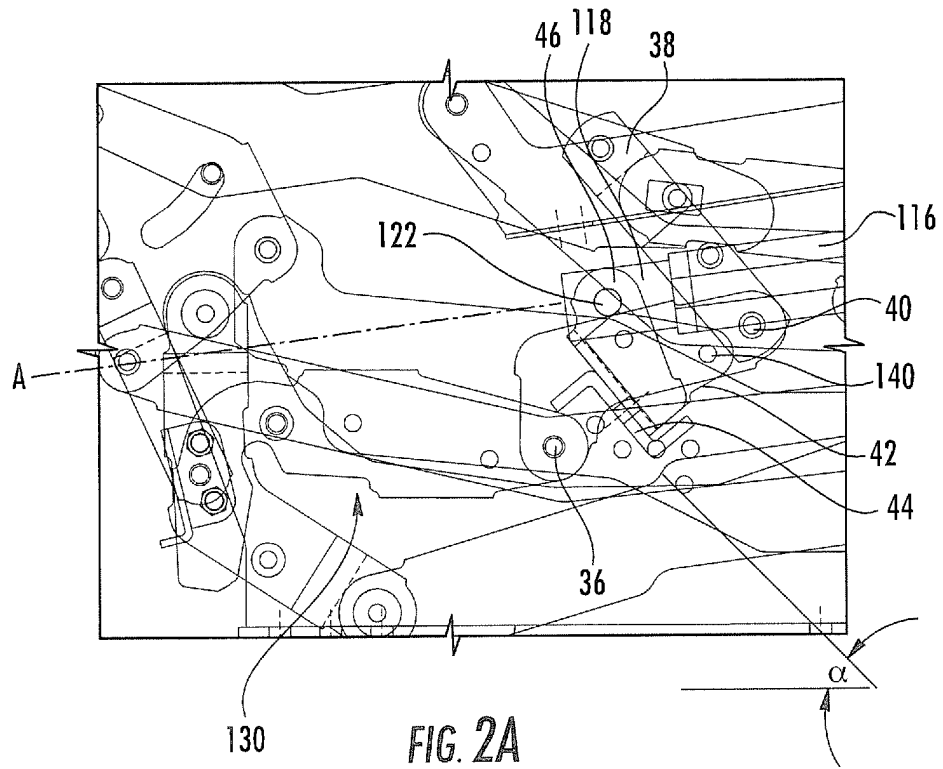
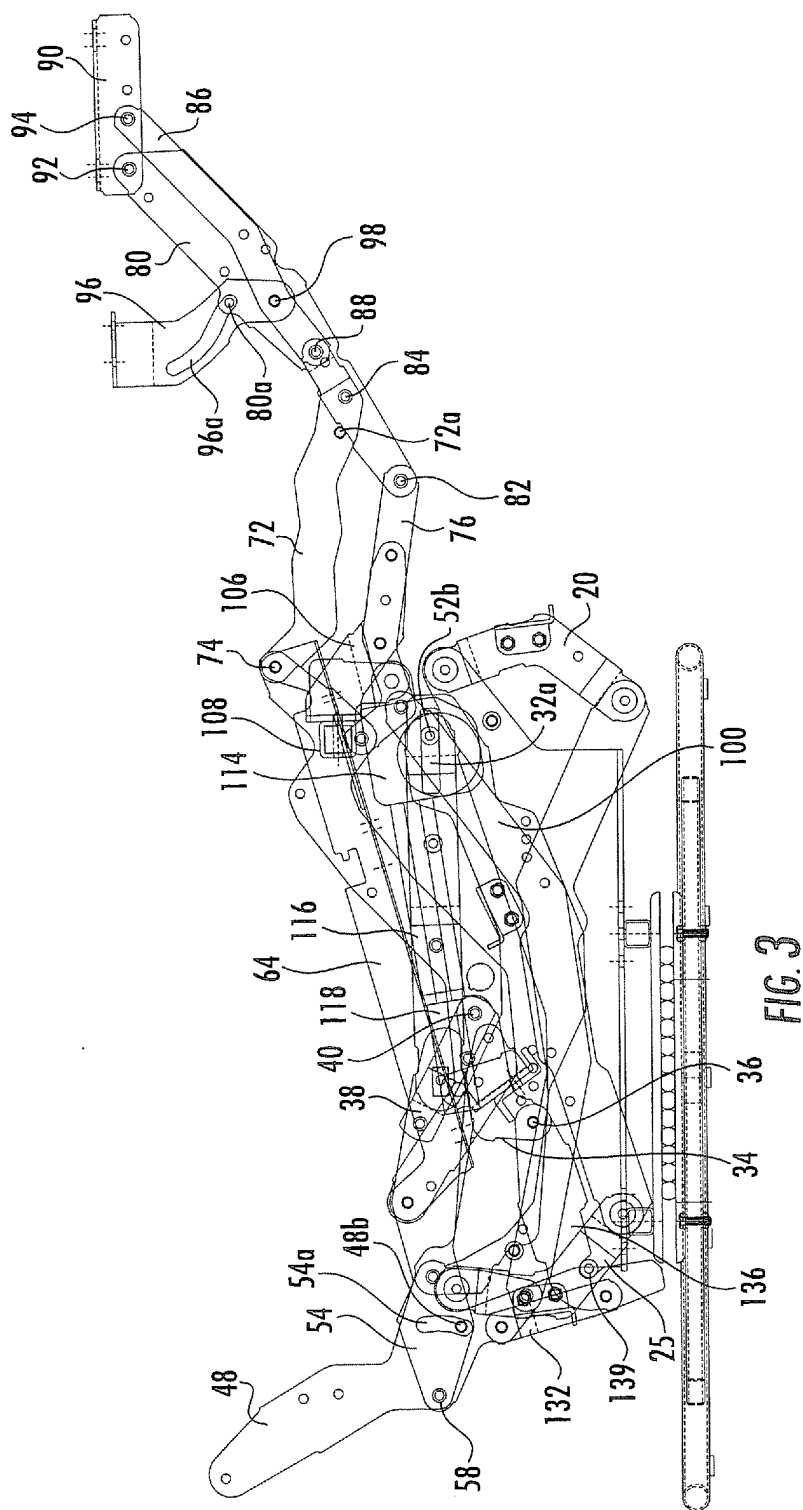


FIG. 2





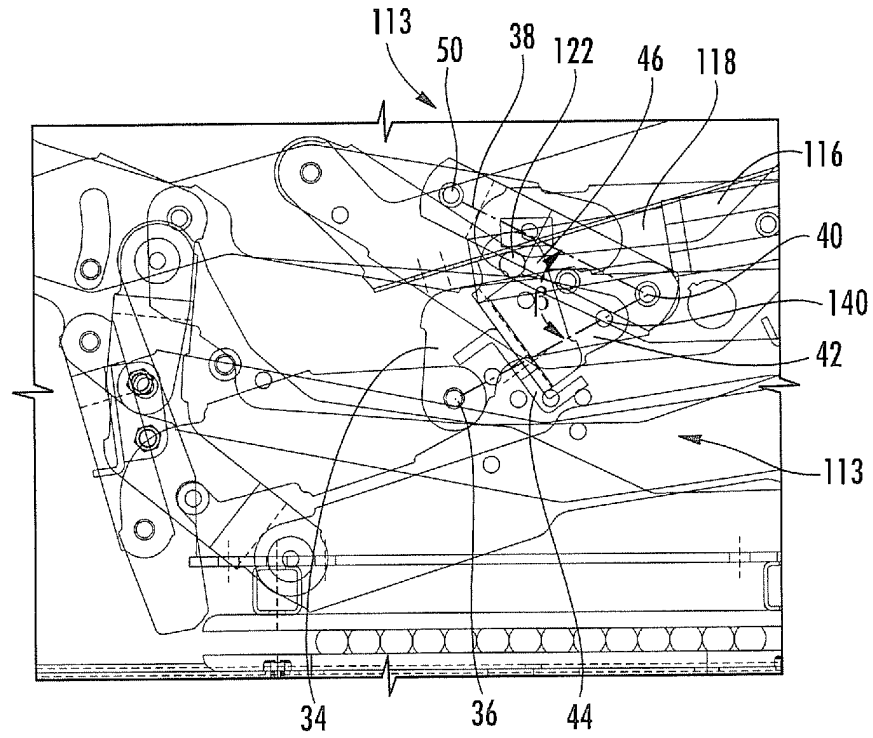


FIG. 3A

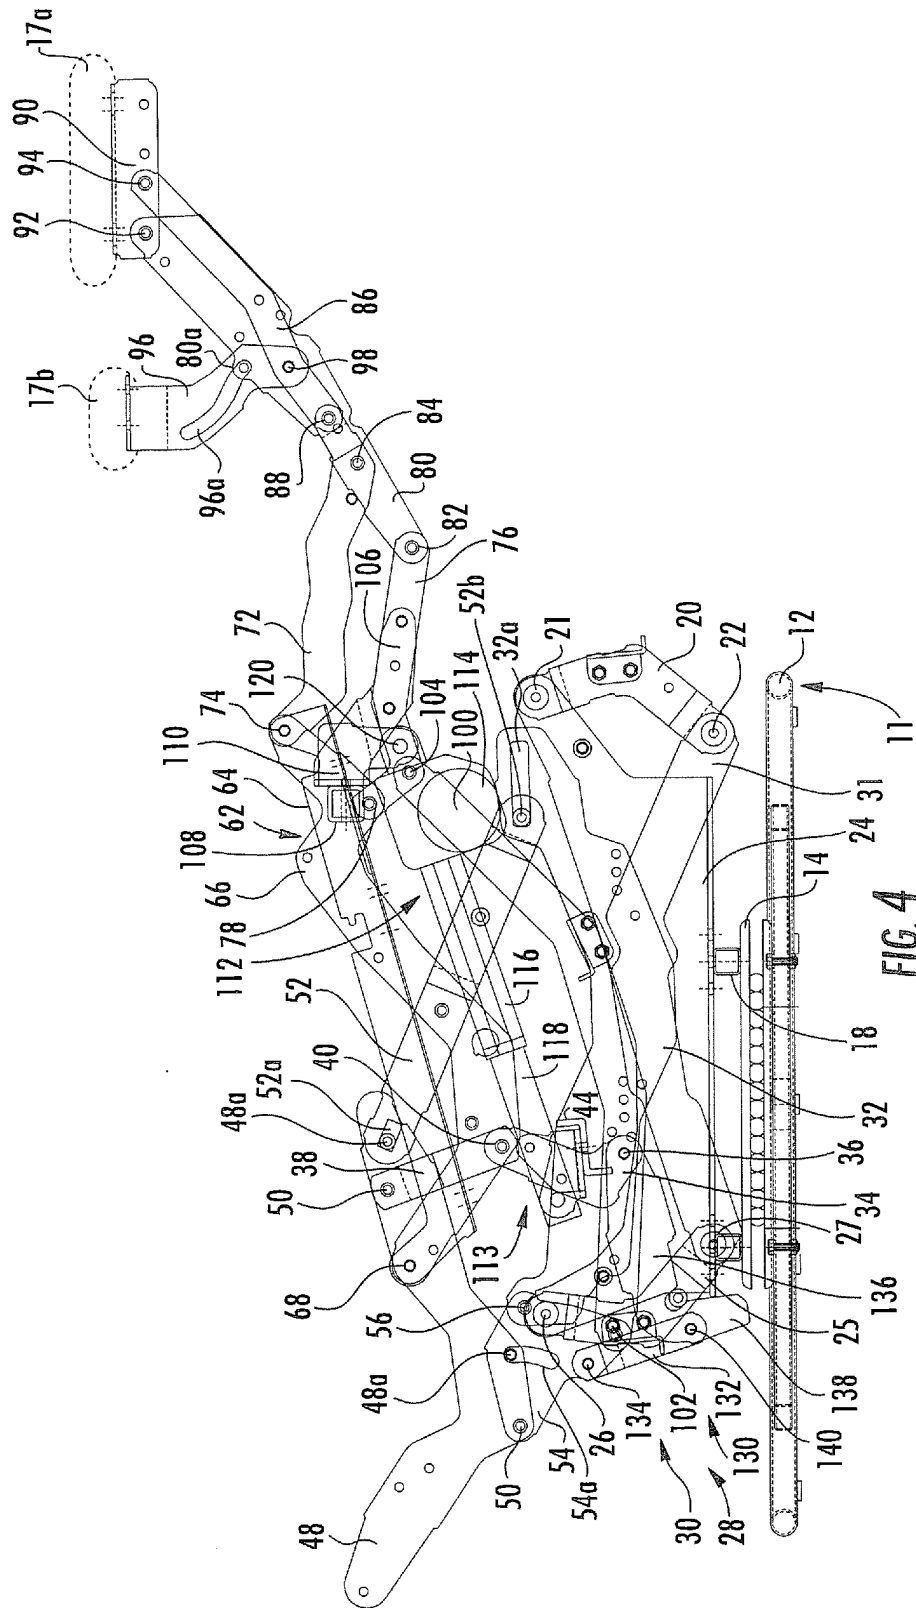


FIG. 4

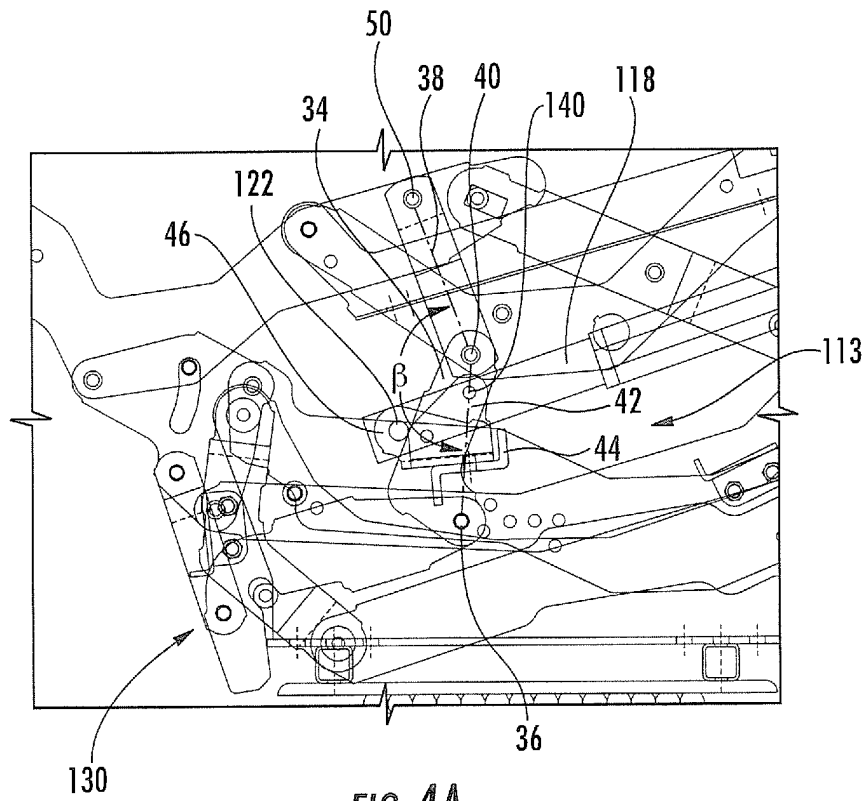


FIG. 4A

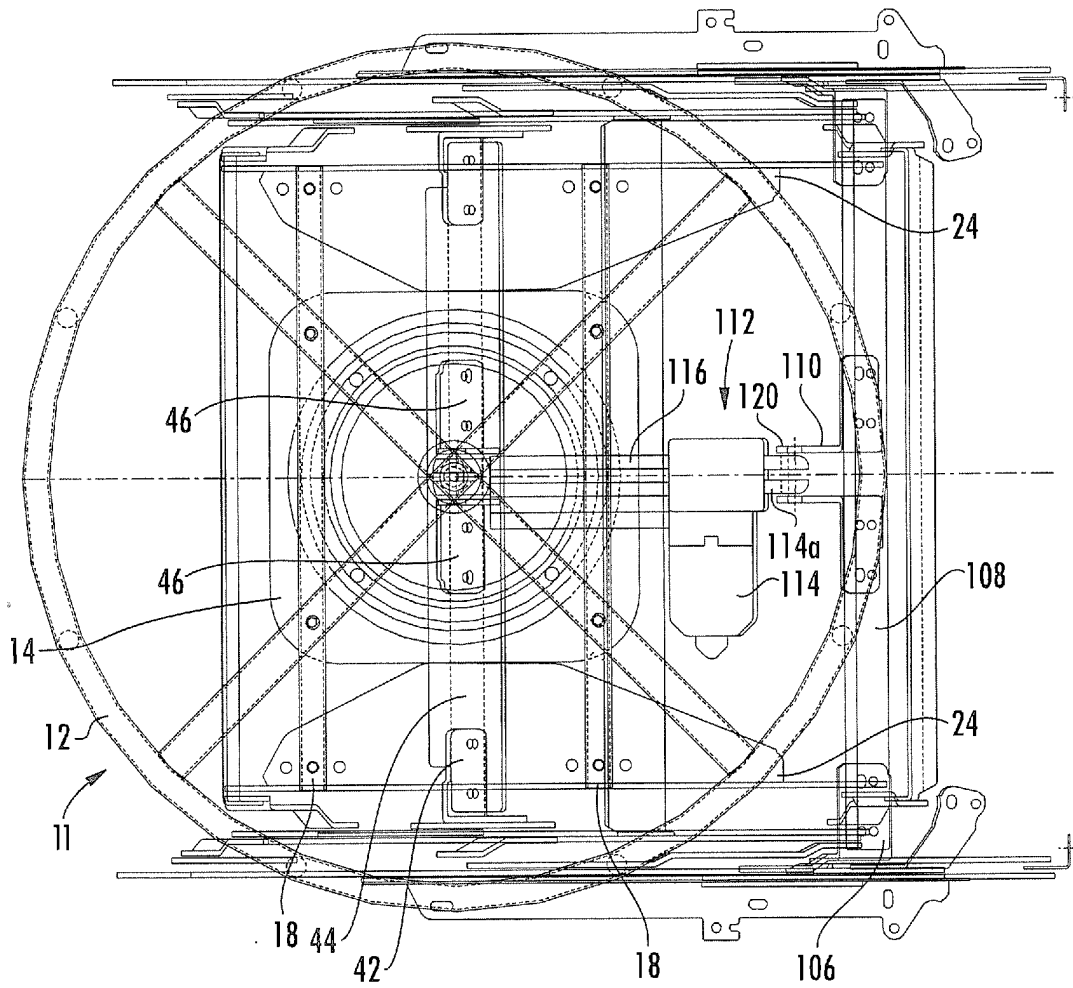


FIG. 5

Electronic Patent Application Fee Transmittal

Application Number:

Filing Date:

Title of Invention:

RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

First Named Inventor/Applicant Name:

D. Stephen Hoffman

Filer:

James R. Cannon/Cara Rose

Attorney Docket Number:

4362-138IP

Filed as Small Entity

Utility under 35 USC 111(a) Filing Fees

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Utility filing Fee (Electronic filing)	4011	1	82	82
Utility Search Fee	2111	1	270	270
Utility Examination Fee	2311	1	110	110

Pages:

Claims:

Miscellaneous-Filing:

Petition:

Patent-Appeals-and-Interference:

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				462

Electronic Acknowledgement Receipt

EFS ID:	5765531
Application Number:	12508901
International Application Number:	
Confirmation Number:	8901
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR
First Named Inventor/Applicant Name:	D. Stephen Hoffman
Customer Number:	20792
Filer:	James R. Cannon/Cara Rose
Filer Authorized By:	James R. Cannon
Attorney Docket Number:	4362-138IP
Receipt Date:	24-JUL-2009
Filing Date:	
Time Stamp:	15:03:31
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$ 462
RAM confirmation Number	1286
Deposit Account	500220
Authorized User	

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		4362_138IP_app_as_filed.pdf	2225035 54b031e6cad04b4b8cdb5561d71181438c2a6f65	yes	29
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Transmittal of New Application		1	2	
	Specification		3	15	
	Claims		16	20	
	Abstract		21	21	
	Drawings-only black and white line drawings		22	29	
Warnings:					
Information:					
2	Fee Worksheet (PTO-875)	fee-info.pdf	32954 a133803f618f7dbca12360f59936aa974395b1c2	no	2
Warnings:					
Information:					
Total Files Size (in bytes):			2257989		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
12/508,901	07/24/2009	D. Stephen Hoffman	4362-138IP

CONFIRMATION NO. 8901

FORMALITIES LETTER



OC000000037258131

20792
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

Date Mailed: 08/12/2009

NOTICE TO FILE MISSING PARTS OF NONPROVISIONAL APPLICATION

FILED UNDER 37 CFR 1.53(b)

Filing Date Granted

Items Required To Avoid Abandonment:

An application number and filing date have been accorded to this application. The item(s) indicated below, however, are missing. Applicant is given **TWO MONTHS** from the date of this Notice within which to file all required items and pay any fees required below to avoid abandonment. Extensions of time may be obtained by filing a petition accompanied by the extension fee under the provisions of 37 CFR 1.136(a).

- The oath or declaration is missing.

A properly signed oath or declaration in compliance with 37 CFR 1.63, identifying the application by the above Application Number and Filing Date, is required.

Note: If a petition under 37 CFR 1.47 is being filed, an oath or declaration in compliance with 37 CFR 1.63 signed by all available joint inventors, or if no inventor is available by a party with sufficient proprietary interest, is required.

The applicant needs to satisfy supplemental fees problems indicated below.

The required item(s) identified below must be timely submitted to avoid abandonment:

- To avoid abandonment, a surcharge (for late submission of filing fee, search fee, examination fee or oath or declaration) as set forth in 37 CFR 1.16(f) of **\$65** for a small entity in compliance with 37 CFR 1.27, must be submitted with the missing items identified in this notice.

SUMMARY OF FEES DUE:

Total additional fee(s) required for this application is **\$65** for a small entity

- **\$65** Surcharge.

Replies should be mailed to:

Mail Stop Missing Parts
Commissioner for Patents
P.O. Box 1450
Alexandria VA 22313-1450

Registered users of EFS-Web may alternatively submit their reply to this notice via EFS-Web.
<https://sportal.uspto.gov/authenticate/AuthenticateUserLocalEPF.html>

For more information about EFS-Web please call the USPTO Electronic Business Center at **1-866-217-9197** or visit our website at <http://www.uspto.gov/ebc>.

If you are not using EFS-Web to submit your reply, you must include a copy of this notice.

/aabranys/

Office of Data Management, Application Assistance Unit (571) 272-4000, or (571) 272-4200, or 1-888-786-0101



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
12/508,901	07/24/2009	3636	462	4362-138IP	15	2

CONFIRMATION NO. 8901

20792
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

FILING RECEIPT



OC000000037258130

Date Mailed: 08/12/2009

Receipt is acknowledged of this non-provisional patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Applicant(s)

D. Stephen Hoffman, Residence Not Provided;
Marcus L. Murphy, Residence Not Provided;

Power of Attorney: None

Domestic Priority data as claimed by applicant

This application is a CIP of 12/276,567 11/24/2008

Foreign Applications

If Required, Foreign Filing License Granted: 08/06/2009

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 12/508,901**

Projected Publication Date: To Be Determined - pending completion of Missing Parts

Non-Publication Request: No

Early Publication Request: No

**** SMALL ENTITY ****

Title

RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

Preliminary Class

297

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

LICENSE FOR FOREIGN FILING UNDER**Title 35, United States Code, Section 184****Title 37, Code of Federal Regulations, 5.11 & 5.15****GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as

set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

Filing Date: 07/24/09

Approved for use through 7/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.


PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875						Application or Docket Number 12/508,901	
APPLICATION AS FILED – PART I							
(Column 1)		(Column 2)		SMALL ENTITY		OR OTHER THAN SMALL ENTITY	
FOR	NUMBER FILED	NUMBER EXTRA		RATE (\$)	FEE (\$)	RATE (\$)	FEE (\$)
BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A		N/A	82	N/A	
SEARCH FEE (37 CFR 1.16(k), (i), or (m))	N/A	N/A		N/A	270	N/A	
EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A		N/A	110	N/A	
TOTAL CLAIMS (37 CFR 1.16(i))	15	minus 20 =		x\$26		OR x\$52	
INDEPENDENT CLAIMS (37 CFR 1.16(h))	2	minus 3 = *		x\$110		OR x\$220	
APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$260 (\$130 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR						
MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))				195		390	
* If the difference in column 1 is less than zero, enter "0" in column 2.				TOTAL	462	TOTAL	
APPLICATION AS AMENDED – PART II							
(Column 1)		(Column 2)		(Column 3)		SMALL ENTITY	
AMENDMENT A	CLAIMS REMAINING AFTER AMENDMENT	HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)	OR OTHER THAN SMALL ENTITY
Total (37 CFR 1.16(i))	*	Minus	**	=	X =		OR X =
Independent (37 CFR 1.16(h))	*	Minus	***	=	X =		OR X =
Application Size Fee (37 CFR 1.16(s))							OR N/A
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))					N/A		OR N/A
					TOTAL		OR TOTAL
					ADD'T FEE		OR ADD'T FEE
(Column 1)		(Column 2)		(Column 3)		SMALL ENTITY	
AMENDMENT B	CLAIMS REMAINING AFTER AMENDMENT	HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)	OR OTHER THAN SMALL ENTITY
Total (37 CFR 1.16(i))	*	Minus	**	=	X =		OR X =
Independent (37 CFR 1.16(h))	*	Minus	***	=	X =		OR X =
Application Size Fee (37 CFR 1.16(s))							OR N/A
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))					N/A		OR N/A
					TOTAL		OR TOTAL
					ADD'T FEE		OR ADD'T FEE
* If the entry in column 1 is less than the entry in column 2, write "0" in column 3. ** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20". *** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3". The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.							

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FORM (to be used for all correspondence after initial filing)	Application Number	12/508,901	
	Filing Date	July 24, 2009	
	First Named Inventor	D. Stephen Hoffman	
	Art Unit	3636	
	Examiner Name	TBA	
Total Number of Pages in This Submission	5	Attorney Docket Number	4362-1381P

ENCLOSURES (Check all that apply)		
☐ Fee Transmittal Form ☐ Fee Attached ☐ Amendment/Reply ☐ After Final ☐ Affidavits/declaration(s) ☐ Extension of Time Request ☐ Express Abandonment Request ☐ Information Disclosure Statement ☐ Certified Copy of Priority Document(s) ☐ Reply to Missing Parts/Incomplete Application ☒ Reply to Missing Parts under 37 CFR 1.52 or 1.53	☐ Drawing(s) ☐ Licensing-related Papers ☐ Petition ☐ Petition to Convert to a Provisional Application ☐ Power of Attorney, Revocation ☐ Change of Correspondence Address ☐ Terminal Disclaimer ☐ Request for Refund ☐ CD, Number of CD(s) _____ ☐ Landscape Table on CD	☐ After Allowance Communication to TC ☐ Appeal Communication to Board of Appeals and Interferences ☐ Appeal Communication to TC (Appeal Notice, Brief, Reply Brief) ☐ Proprietary Information ☐ Status Letter ☐ Other Enclosure(s) (please identify below):
Remarks		
SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT		
Firm Name	Myers Bigel Sibley & Sajovec	
Signature		
Printed name	James R. Cannon	
Date	September 1, 2009	Reg. No. 35,839

CERTIFICATION OF ELECTRONIC TRANSMISSION			
I hereby certify that this Fee(s) Transmittal is being transmitted via the Office electronic filing system in accordance with § 1.6(a)(4) to the U.S. Patent and Trademark Office, on the date indicated below.		I hereby certify that this c sufficient postage as first the date shown below:	
		Signature 	
Typed or printed name	Joyce Padli	Date	September 1, 2009

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **RECIPROCATING SEATING UNIT WITH POWER ACTUATOR**

the specification of which

☐ is attached hereto

OR

☒ was filed on July 24, 2009 as United States Application No. 12/508,901 or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

			☐ Yes ☐ No
Number	Country	MM/DD/YYYY Filed	Priority Claimed
			☐ Yes ☐ No
Number	Country	MM/DD/YYYY Filed	Priority Claimed

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following registered attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. I also appoint the following registered attorney(s) to represent me before all competent International Authorities in connection with any and all international applications filed by me with an appropriate receiving office claiming priority to the U.S. application. I also appoint the following registered attorney(s) to make or receive payment on my behalf in connection with the filing of such international applications.

Customer No. 20792
Myers Bigel Sibley & Sajovec, P.A.
P. O. Box 37428
Raleigh, North Carolina 27627
Telephone: (919) 854-1400
Facsimile: (919) 854-1401

Send correspondence to: **Customer No. 20792**
James R. Cannon
Myers Bigel Sibley & Sajovec, P.A.
P. O. Box 37428
Raleigh, North Carolina 27627
Telephone: (919) 854-1400
Facsimile: (919) 854-1401


Direct telephone calls to: James R. Cannon
(919) 854-1400

Facsimile: (919) 854-1401

Full name of first inventor: **D. Stephen Hoffman**

Inventor's

Signature:

 Date: 8.28.2009

Residence:

High Point, North Carolina

Citizenship:

the United States of America

Mailing Address:

222 Cascade Drive, High Point, North Carolina

Full name of second inventor: **Marcus L. Murphy**

Inventor's

Signature: Marcus L. Murphy Date: 8.28.2009

Residence: Lexington, North Carolina

Citizenship: the United States of America

Mailing Address: 230 Lowe Drive, Lexington, North Carolina

Electronic Patent Application Fee Transmittal

Application Number:	12508901			
Filing Date:	24-Jul-2009			
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR			
First Named Inventor/Applicant Name:	D. Stephen Hoffman			
Filer:	James R. Cannon/Joyce Paoli			
Attorney Docket Number:	4362-138IP			
Filed as Small Entity				
Utility under 35 USC 111(a) Filing Fees				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Pages:				
Claims:				
Miscellaneous-Filing:				
Late filing fee for oath or declaration	2051	1	65	65
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Total in USD (\$)				65

Electronic Acknowledgement Receipt

EFS ID:	5992311
Application Number:	12508901
International Application Number:	
Confirmation Number:	8901
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR
First Named Inventor/Applicant Name:	D. Stephen Hoffman
Customer Number:	20792
Filer:	James R. Cannon/Joyce Paoli
Filer Authorized By:	James R. Cannon
Attorney Docket Number:	4362-138IP
Receipt Date:	01-SEP-2009
Filing Date:	24-JUL-2009
Time Stamp:	13:59:51
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$65
RAM confirmation Number	142
Deposit Account	500220
Authorized User	

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Oath or Declaration filed	4362-139IPdeclaration.pdf	336712 5169f0fb3ee327ff8d975c362015a7037752db1d	no	5

Warnings:**Information:**

2	Fee Worksheet (PTO-875)	fee-info.pdf	30177 e8db4654b854dc630566011ed10c09f898ae223f	no	2
---	-------------------------	--------------	---	----	---

Warnings:**Information:**

Total Files Size (in bytes):			366889
------------------------------	--	--	--------

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
12/508,901	07/24/2009	3636	527	4362-138IP	15	2

CONFIRMATION NO. 8901

UPDATED FILING RECEIPT

20792
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627



Date Mailed: 09/10/2009

Receipt is acknowledged of this non-provisional patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Applicant(s)

D. Stephen Hoffman, High Point, NC;
Marcus L. Murphy, Lexington, NC;

Power of Attorney: The patent practitioners associated with Customer Number 20792

Domestic Priority data as claimed by applicant

This application is a CIP of 12/276,567 11/24/2008

Foreign Applications

If Required, Foreign Filing License Granted: 08/06/2009

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 12/508,901**

Projected Publication Date: 05/27/2010

Non-Publication Request: No

Early Publication Request: No

**** SMALL ENTITY ****

Title

RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

Preliminary Class

297

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

LICENSE FOR FOREIGN FILING UNDER**Title 35, United States Code, Section 184****Title 37, Code of Federal Regulations, 5.11 & 5.15****GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as

set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

11/10/2009		Complete if Known	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT		Application Number	12/508,901
		Filing Date	July 24, 2009
		First Named Inventor	D. Stephen Hoffman
		Art Unit	3636
		Examiner Name	TBA
(use as many sheets as necessary)		Attorney Docket Number	4362-138IP
Sheet	A1	of	A2

U.S. PATENT DOCUMENTS AND APPLICATIONS					
Examiner Initials*	Cite No.	Document Number Number-Kind Code (if known)	Publication Date MM-DD- YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
	1.	US- 7,311,359 B2	12-25-2007	Smith	
	2.	US- 7,293,834 B2	11-13-2007	Riach et al.	
	3.	US- 7,188,904 B2	03-13-2007	Bruck et al.	
	4.	US- 7,083,235 B2	08-01-2006	Grimm et al.	
	5.	US- 7,040,692 B1	05-2006	Pine, James J.	
	6.	US- 7,021,711 B1	04-04-2006	Hoffman et al.	
	7.	US- 6,948,777 B2	09-27-2005	Marshall et al.	
	8.	US- 6,945,599	09-2005	May	
	9.	US- 6,733,071	05-2004	Guillot	
	10.	US- 6,634,706	10-2003	May	
	11.	US- 6,612,650 B1	09-02-2003	Ambrosio et al.	
	12.	US- 6,540,291	04-01-2003	Hoffman et al.	
	13.	US- 6,491,342 B1	12-10-2002	Smith	
	14.	US- 6,231,120	05-2001	Wiecek	
	15.	US- 6,135,559	10-2000	Kowaiski	
	16.	US- 6,000,754	12-14-1999	Lawson	
	17.	US- 5,954,392	09-1999	Liss et al.	
	18.	US- 5,931,535 A	08-03-1999	Sweet	
	19.	US- 5,884,970 A	03-23-1999	Howard	
	20.	US- 5,876,094	03-1999	Hoffman	
	21.	US- 5,775,775	07-1998	Hoffman, D. Stephen	
	22.	US- 5,564,781	10-1996	Pine	
	23.	US- 5,294,177	03-1994	Rasnick et al.	
	24.	US- 5,086,769	02-11-1992	Vianello et al.	
	25.	US- 5,007,679	04-16-1991	Mizelle	
	26.	US- 4,915,444	04-10-1990	Rogers Jr.	
	27.	US- 4,813,743	03-21-1989	Mizelle	
	28.	US- 4,722,566	02-02-1988	Castellini	
	29.	US- 4,707,025	11-1987	Rogers, Jr.	
	30.	US- 4,696,512	09-29-1987	Burnett et al.	
	31.	US- 4,691,964	09-08-1987	Morgan	
	32.	US- 4,682,815 A	07-28-1987	Steifensand	
	33.	US- 4,681,365	07-21-1987	Pine	
	34.	US- 4,674,794	06-23-1987	Pine	
	35.	US- 4,519,647	05-28-1985	Rogers	
	36.	US- 4,386,803	06-07-1983	Gilderbloom	
	37.	US- 4,307,912	12-29-1981	Watt et al.	
	38.	US- 3,863,980	02-04-1975	Ciner	

Examiner Signature	Date Considered
-----------------------	--------------------

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

11/10/2009		Complete if Known			
INFORMATION DISCLOSURE STATEMENT BY APPLICANT (use as many sheets as necessary)		Application Number	12/508,901		
		Filing Date	July 24, 2009		
		First Named Inventor	D. Stephen Hoffman		
		Art Unit	3636		
		Examiner Name	TBA		
Sheet	A2	of	A2	Attorney Docket Number	4362-138IP

	39.	US-	3,637,255	01-1972	Re, Frank M.	
	40.	US-	3,622,202	11-23-1971	Brown	
	41.	US-	3,622,198	11-1971	Re, Frank M.	
	42.	US-	3,493,264	02-1970	Re, Frank M.	
	43.	US-	3,383,135	05-14-1968	Posh	
	44.	US-	3,352,601	11-1967	Izchak Cycowicz	
	45.	US-	3,279,847	10-1966	Re	
	46.	US-	3,163,464	12-1964	Martin Leonard L.	
	47.	US-	3,147,038	09-01-1964	Barabas	
	48.	US-	2,714,922	08-09-1955	McKibban et al.	
	49.	US-	2,526,623 A	10-24-1950	Maurer	
	50.	US-	0,507,270 A	10-24-1893	Name Not Available	
	51.	US-	2006/0082195 A1	04-20-2006	Jiang	

FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No.	Foreign Patent Document Country Code, Number, Kind Code (if known)	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T
	52.	GB 2 106 777 A	04-20-1983	Stella-Mobelwerk GmbH (DE)		Abstract

NON PATENT LITERATURE DOCUMENTS			
Examiner Initials*	Cite No.	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published	T
	53.	Lusch Brochure: "Functional Fitting and Tubular steel frames for Relaxing Chairs (11 pages), Functional Fittings for Sofabeds and Beds (10 pages), Bed Fitting (5 pages) and Upholstery joints and accessories for furniture (9 pages)", (available before April 7, 2006).	Yes
	54.	"Stawett Functional Bed Mechanisms Brochure", pp. 3-93 (2001).	Yes

Examiner Signature		Date Considered	
--------------------	--	-----------------	--

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 809. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

A doubly extensible bed or reclining chair having an extended foot member


Patent number: GB2106777 (A)
Publication date: 1983-04-20
Inventor(s): BOLTE JOSEPH [DE]
Applicant(s): STELLA MOEBELWERK GMBH [DE]
Classification:
- international: **A47C17/13; A47C17/00;** (IPC1-7): A47C17/13
- european: A47C17/13B2
Application number: GB19820018409 19820625
Priority number(s): DE19810028830U 19811002

Also published as:

DE8128830 (U1)
DD203821 (A5)
BE893021 (A1)

Abstract of GB 2106777 (A)

A doubly extensible bed or reclining chair, including a basic frame (10), a seat frame (20) capable of being extended from the basic frame with a back member (11) hingedly connected to the seat frame, and a front box member (30) capable of being extended from the seat frame, characterised in that a foot frame (36) is inserted in the front box member (30) and is hingedly connected on either side to the side panels (32) of the front box member (30) by means of two control levers (33, 34) and the foot frame (36) is outwardly pivotable from the front box member (30) beyond the end panel (30a) of the front box member (30) by the control levers (33, 34) to further extend the reclining surface.

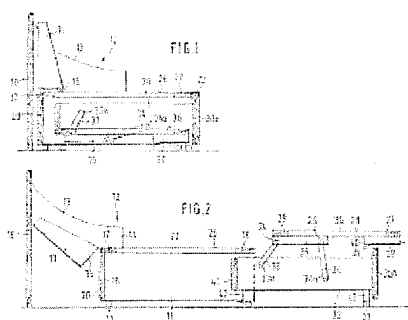


Data supplied from the esp@cenet database — Worldwide

LUSCH

**Funktionsbeschläge
für Polstermöbel**

**Functions for
upholstered furniture**

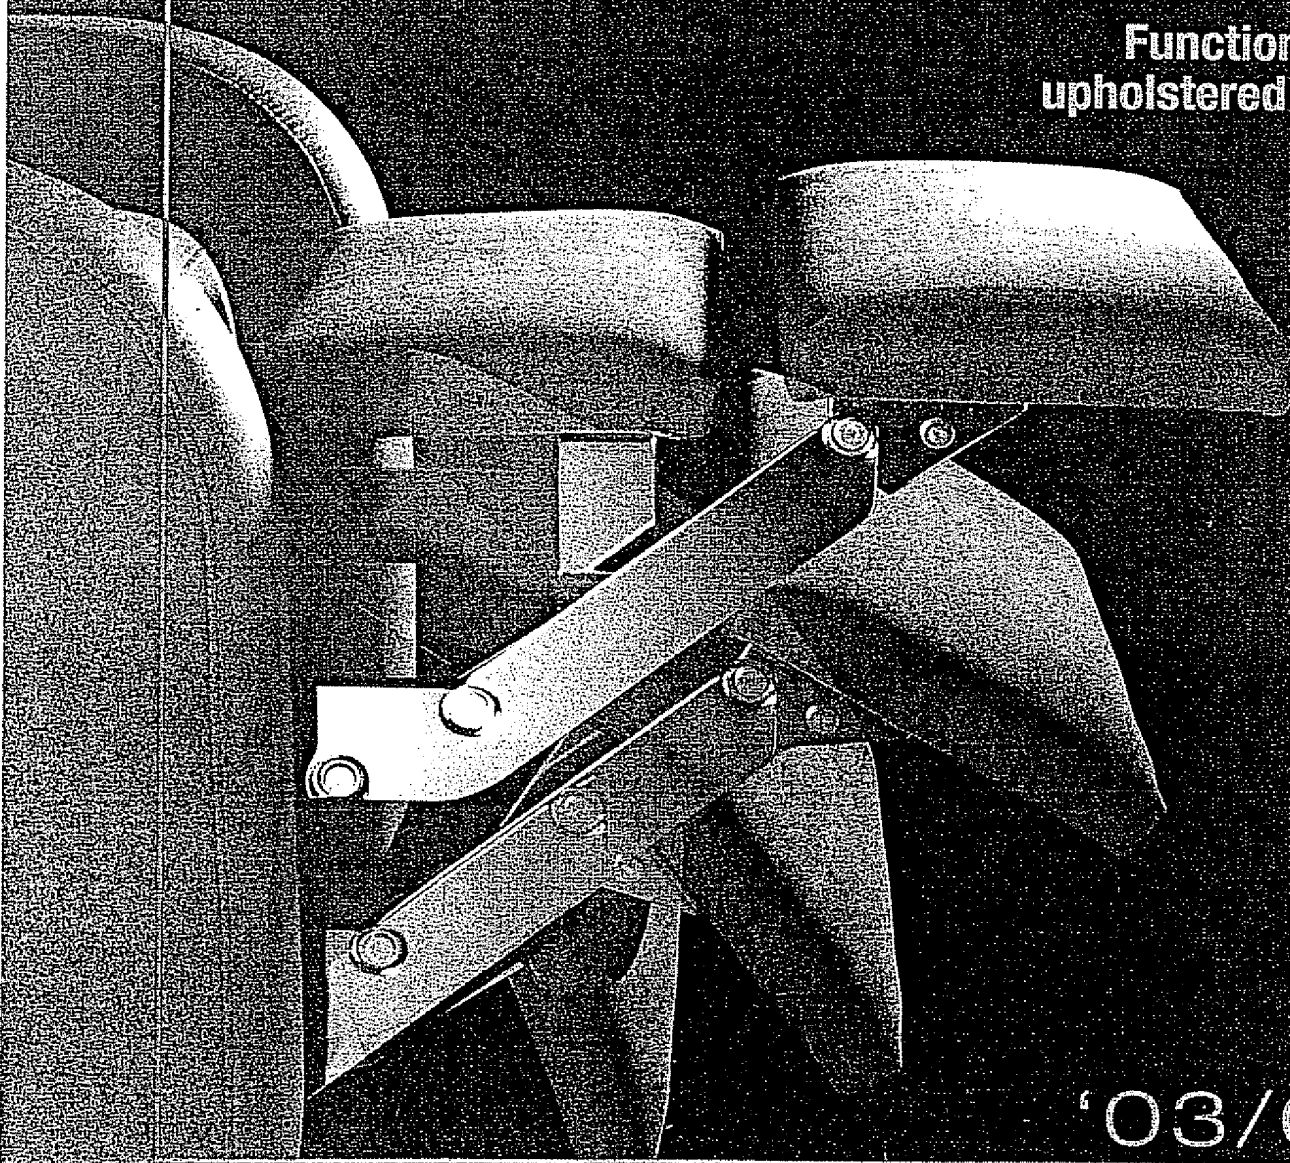

'03/04

**Funktionsbeschläge und
Stahlrohrgestelle für**






Ruhesessel

in allen gängigen Varianten.
Millionenfach bewährt und in-Top-Qualität.

Zur weiteren Information schicken wir Ihnen
gern **Sonderprospekte und Zeichnungen**
mit Maßen und Bohr Bildern.

Holzgestelle mit montierten Beschlägen
liefern wir zum Selbstkostenpreis auf Anfrage.

Gepolsterte Prototypen finden Sie in unserer
Ausstellung. Herzlich willkommen.

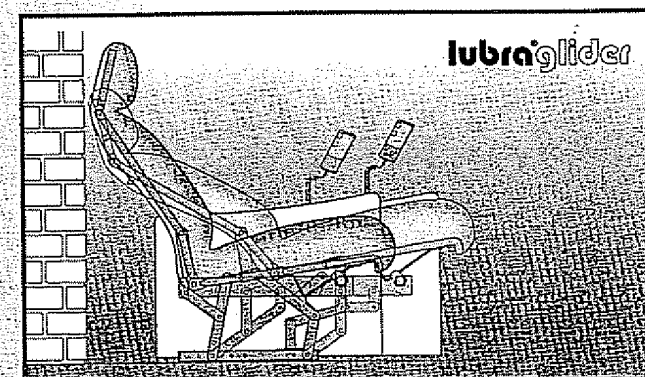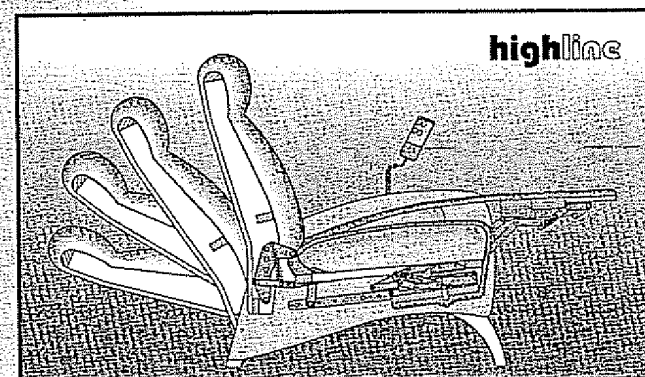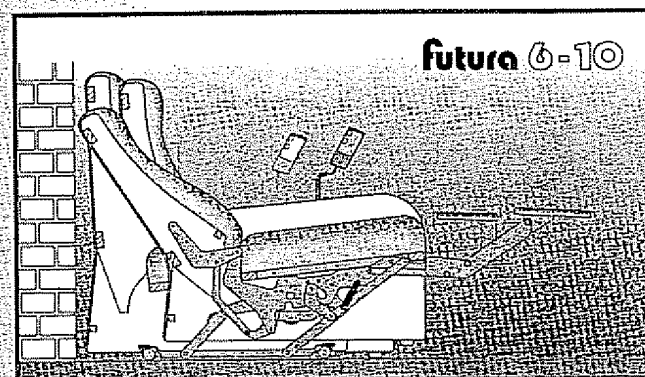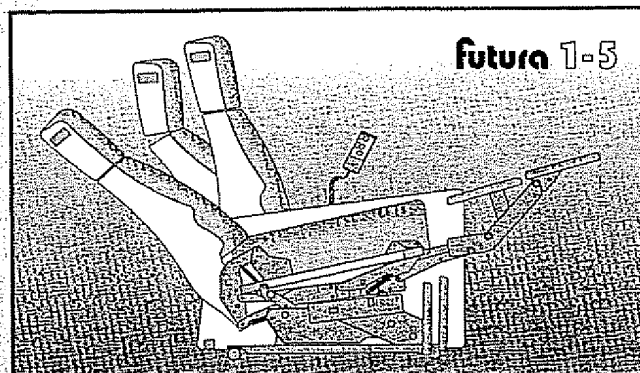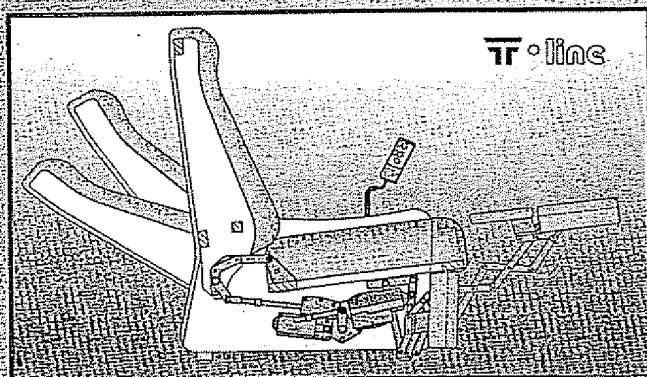

**Functional fittings and
Tubular steel frames for**

Relaxing Chairs

in all common variations. Proven to be of top
quality over a million times.

For further information we will be pleased
to send you **detailed leaflets** showing
measurements and drill patterns.

Timber frames with mounted fittings can be
supplied on request at cost.

Upholstered prototypes you will find in our
showroom. We would be glad to welcome you.

Ruhesessel

futura

Funktionsbeschläge für
Einzelsessel

Fußteil verchromt

kombinierte oder getrennte
Verstellung von Rücken und Sitz-/Fußteil

Verstellung wahlweise


- ⊗ manuell
- ⊗ motorisch (1 oder 2 Motoren)

auf Wunsch mit

- ⊗ Aufstehhilfe
- ⊗ automatischer Kopfteilverstellung
- ⊗ abnehmbarem Rücken für leichteren Transport
- ⊗ Metallrahmen (s. S. 39)

Weitere Informationen
bitte anfordern unter **AF 16**

futura 1-5

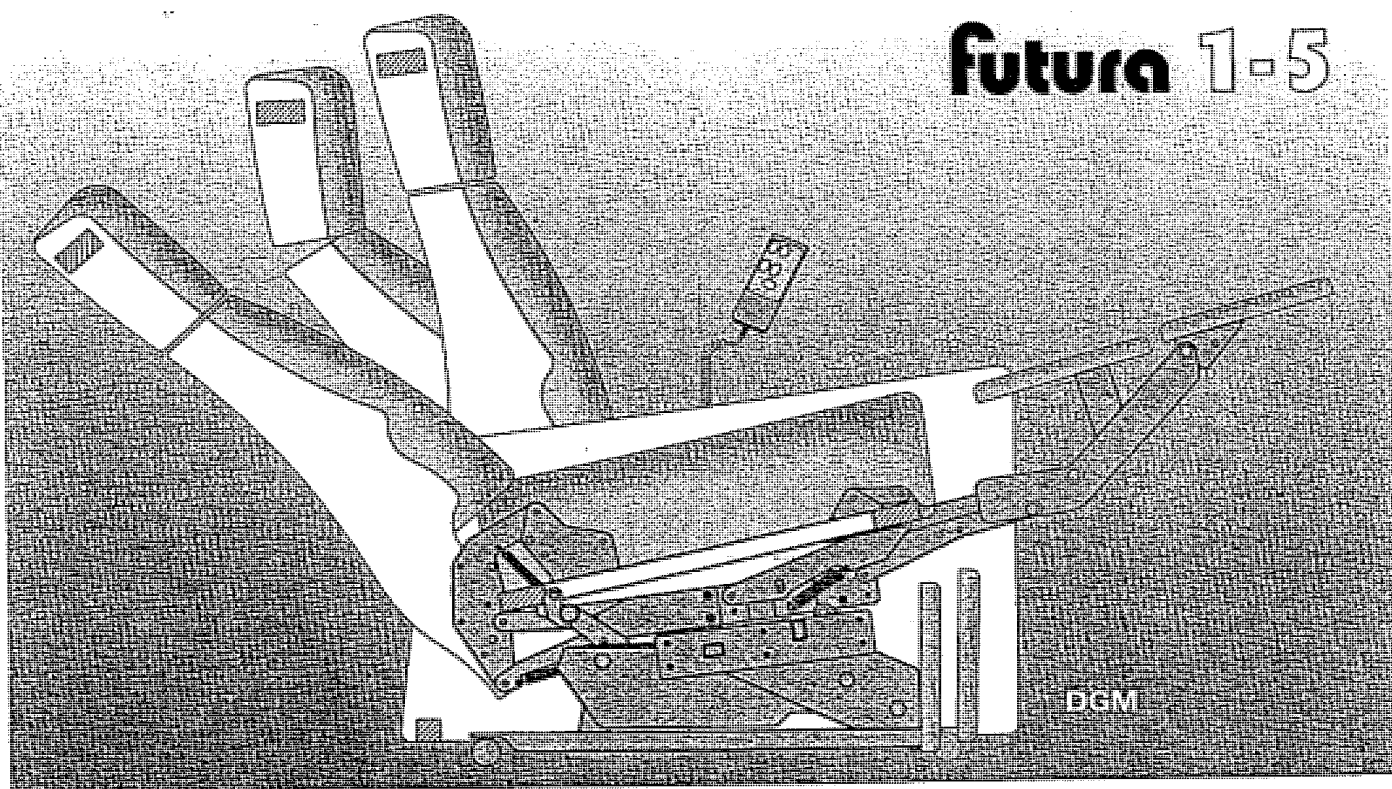

Relaxing Chairs

futura

Functional fittings for
single seaters

chrome plated footpart

combined or separate
adjustment of back and seat-/footpart

adjustment optional

- ⊗ manual
- ⊗ motorised (1 or 2 motors)

on request with

- ⊗ motor lift
- ⊗ automatic headrest adjustment
- ⊗ K.D.back for easy transport
- ⊗ metal frames (s. p. 39)

For further information
please request under **AF 16**

Ruhesessel

futura

Funktionsbeschläge für
Einzelsessel und Garnituren

Fußteil verchromt


wandfreie
kombinierte oder getrennte
Verstellung von Rücken und Sitz- / Fußteil

- ☉ manuell mit
Außenhebel
Griffschale
Schlaufe
- ☉ motorisch (1 oder 2 Motoren)

auf Wunsch mit

- ☉ Metallrahmen (s. S. 39)

Weitere Informationen
bitte anfordern unter **AF 24**

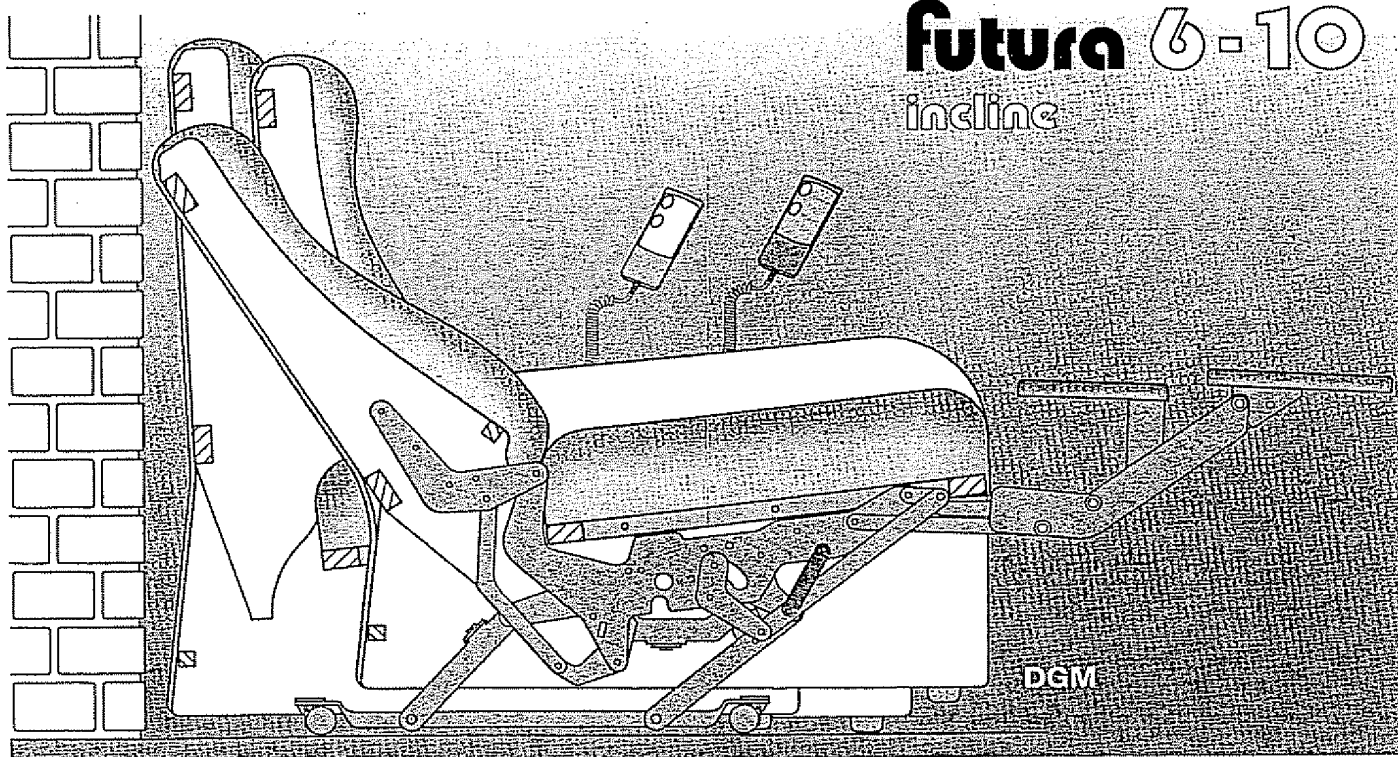

Relaxing Chairs

futura

Functional fittings for
single and multi seaters

chrome plated footpart

wall-away
combined or separate
adjustment of back and seat- / footpart

- ☉ manual by
ext. handle
shell handle (lever actuator)
loop
- ☉ motorised (1 or 2 motors)

on request with

- ☉ metal frames (s. p. 39)

For further information
please request under **AF 24**

Ruhesessel

highline

Funktionsbeschläge für
bodenfreie
Einzelsessel und Garnituren

Fußteil schwenkt waagrecht unter den Sitz

kombinierte oder getrennte

Verstellung von Rücken und Sitz- / Fußteil
bis in die Herz-Waage-Position


Verstellung wahlweise

- ⊗ manuell
- ⊗ per Schlaufe (mittels Gasfeder)
- ⊗ motorisch (1 oder 2 Motoren)

auf Wunsch mit

- ⊗ Fußteilverlängerung (+ 9 cm), s. Abb.

Weitere Informationen
bitte anfordern unter **AF 10**

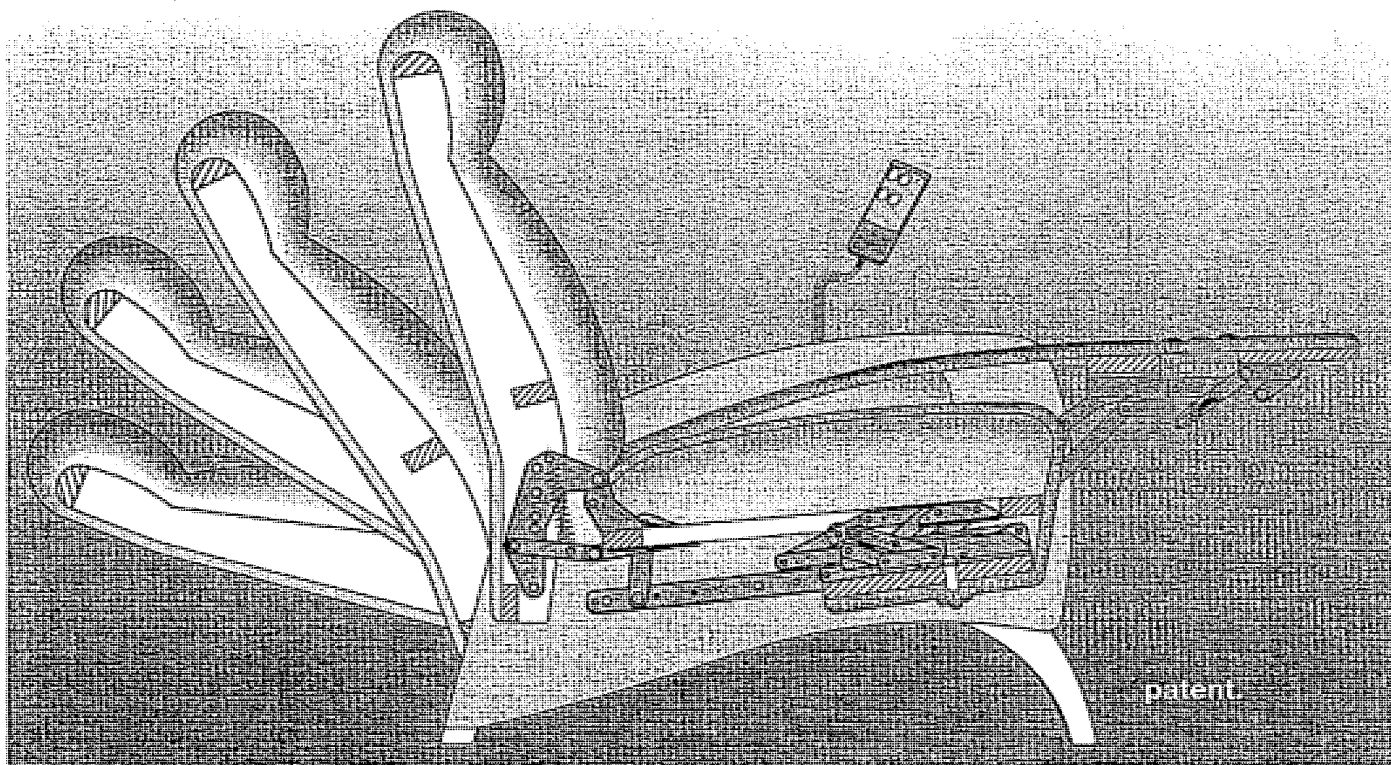

Relaxing Chairs

highline

Functional fittings for
high leg
single and multi seaters

the footpart folds horizontally under the seat

combined or separate
adjustment of back and seat- / footpart
into the horizontal footrest position

adjustment optional

- ⊗ manual
- ⊗ by loop (per gas spring)
- ⊗ motorised (by 1 or 2 motors)

on request with

- ⊗ extended footrest (+ 9 cm) see picture

For further information
please request under **AF 10**

Ruhesessel

highline

Funktionsbeschläge für
bodenfreie

Einzelstessel auf Drehgestell

Fußteil schwenkt waagrecht unter den Sitz

kombinierte oder getrennte
Verstellung von Rücken und Sitz- / Fußteil
bis in die Herz-Waage-Position

Verstellung wahlweise


- ☉ manuell
- ☉ per Schlaufe (mittels Gasfeder)
- ☉ motorisch (1 oder 2 Motoren)

auf Wunsch mit

- ☉ Fußteilverlängerung (+ 9 cm), s. Abb.
- ☉ Drehgestell-Unterteilen in unterschiedlichen Ausführungen

Weitere Informationen
bitte anfordern unter

AF 11

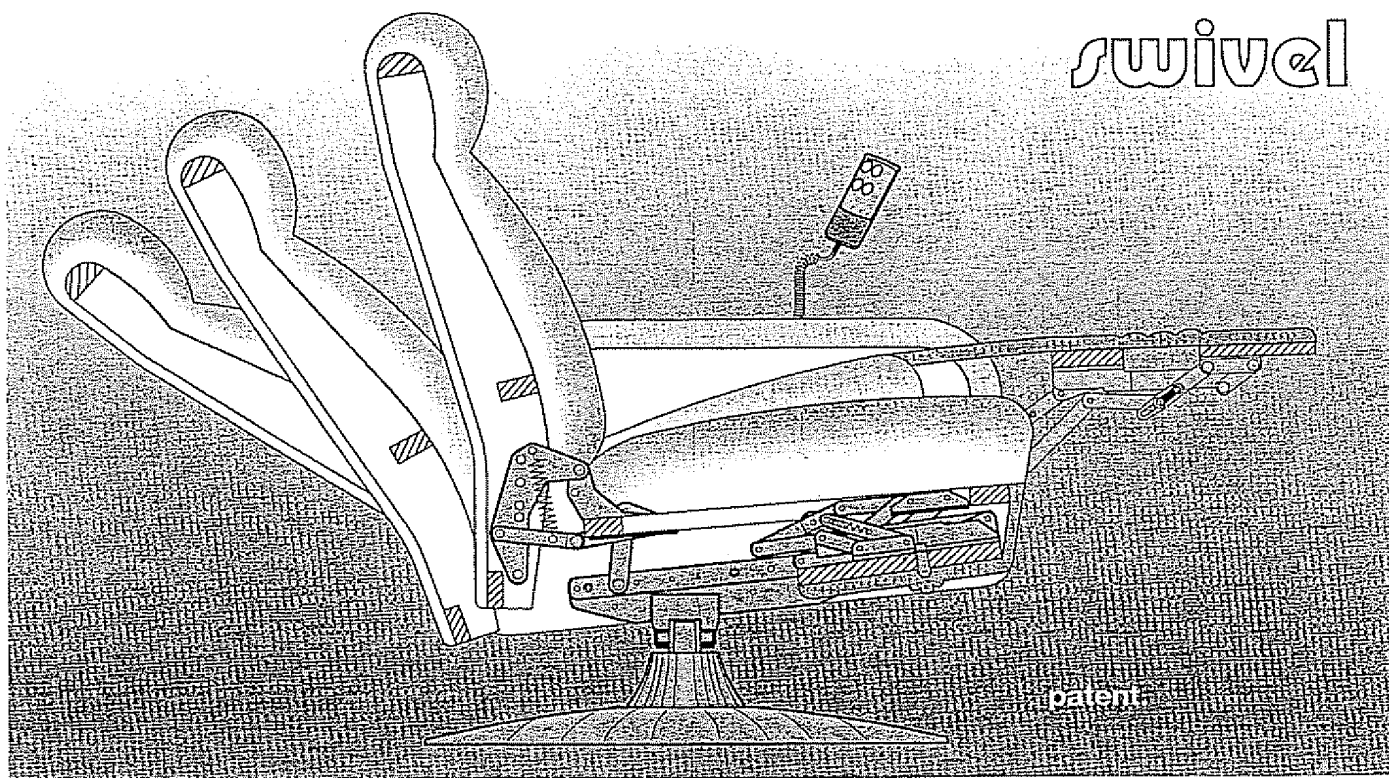

Relaxing Chairs

highline

Functional fittings for
high leg

single seaters
with swivel base

the footpart folds horizontally under the seat

combined or separate
adjustment of back and seat- / footpart
into the horizontal footrest position

adjustment optional

- ☉ manual
- ☉ by loop (per gas spring)
- ☉ motorised (by 1 or 2 motors)

on request with

- ☉ extended footrest (+ 9 cm) see picture
- ☉ disc bases in different versions

For further information
please request under

AF 11

Ruhesessel

highline

Funktionsbeschläge für
bodenfreie
Einzelsessel und Garnituren

Fußteil schwenkt waagrecht unter den Sitz

kombinierte

Verstellung von Rücken und Sitz-/Fußteil
in jede gewünschte Position
mit zusätzlicher **Wellness-Position**


Verstellung wahlweise

- ⊗ manuell
- ⊗ motorisch (1 Motor)

auf Wunsch mit

- ⊗ Fußteilverlängerung (+ 9 cm), s. Abb.

Weitere Informationen
bitte anfordern unter **AF 11**

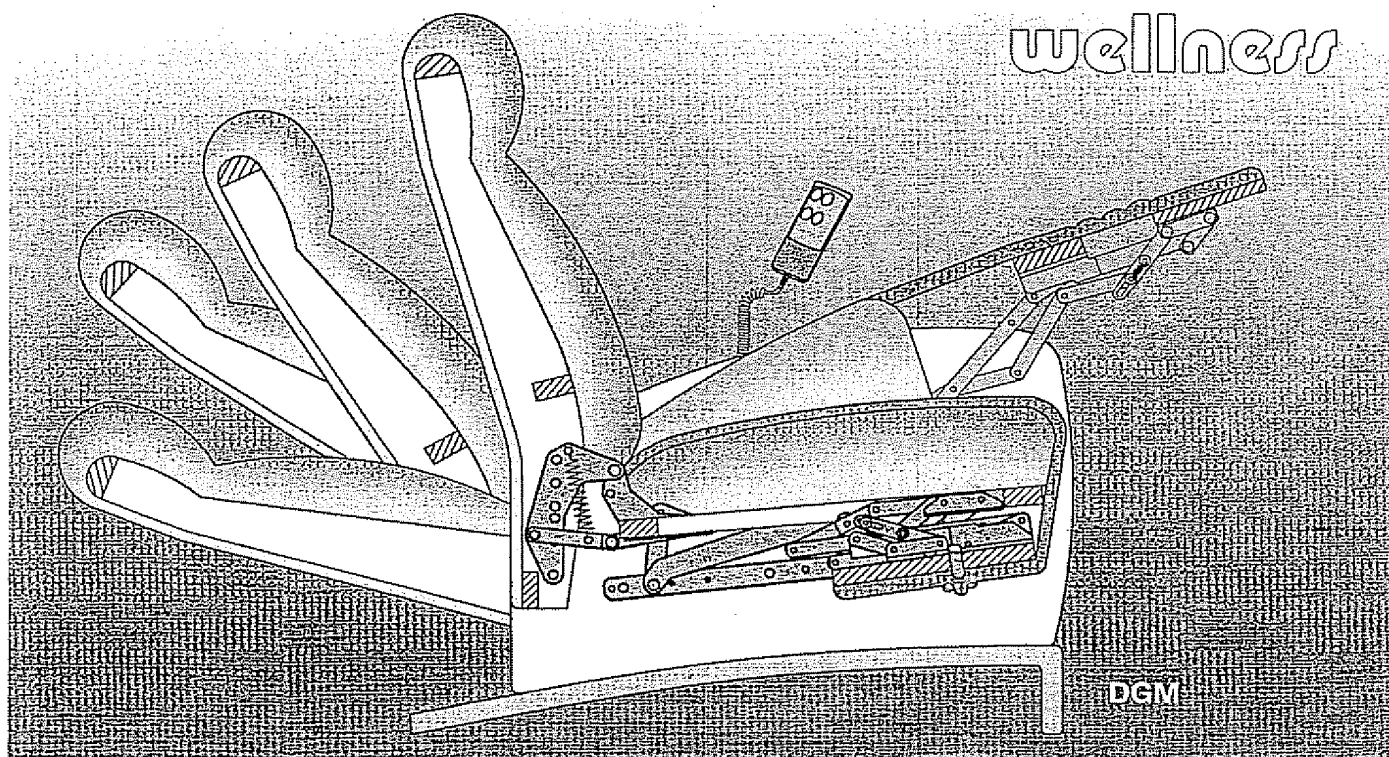

Relaxing Chairs

highline

Functional fittings for
high leg
single and multi seaters

the footpart folds horizontally under the seat

combined

adjustment of back and seat-/footpart
into every position required
with additional **wellness position**

adjustment optional

- ⊗ manual
- ⊗ motorised (by 1 motor)

on request with

- ⊗ extended footrest (+ 9 cm) see picture

For further information
please request under **AF 11**

Ruhesessel

TR-line

**Funktionsbeschläge für
Einzelsessel und Garnituren**

mit T-(Hammerkopf-) Kissen

Sitz / Seitenteile **fest verbunden**
Rücken / Fußteil **getrennt verstellbar**

Verstellung wahlweise


- ⊗ manuell: per Schlaufe, Innen- oder Außenhebel
- ⊗ motorisch (mit 2 Motoren)

auf Wunsch mit

- ⊗ Aufstehhilfe
- ⊗ Fußteilklappe (mit / ohne Massagemotor)
- ⊗ Fußteilverlängerung
- ⊗ abnehmbarem Rücken für leichteren Transport

Weitere Informationen
bitte anfordern unter

AF 12

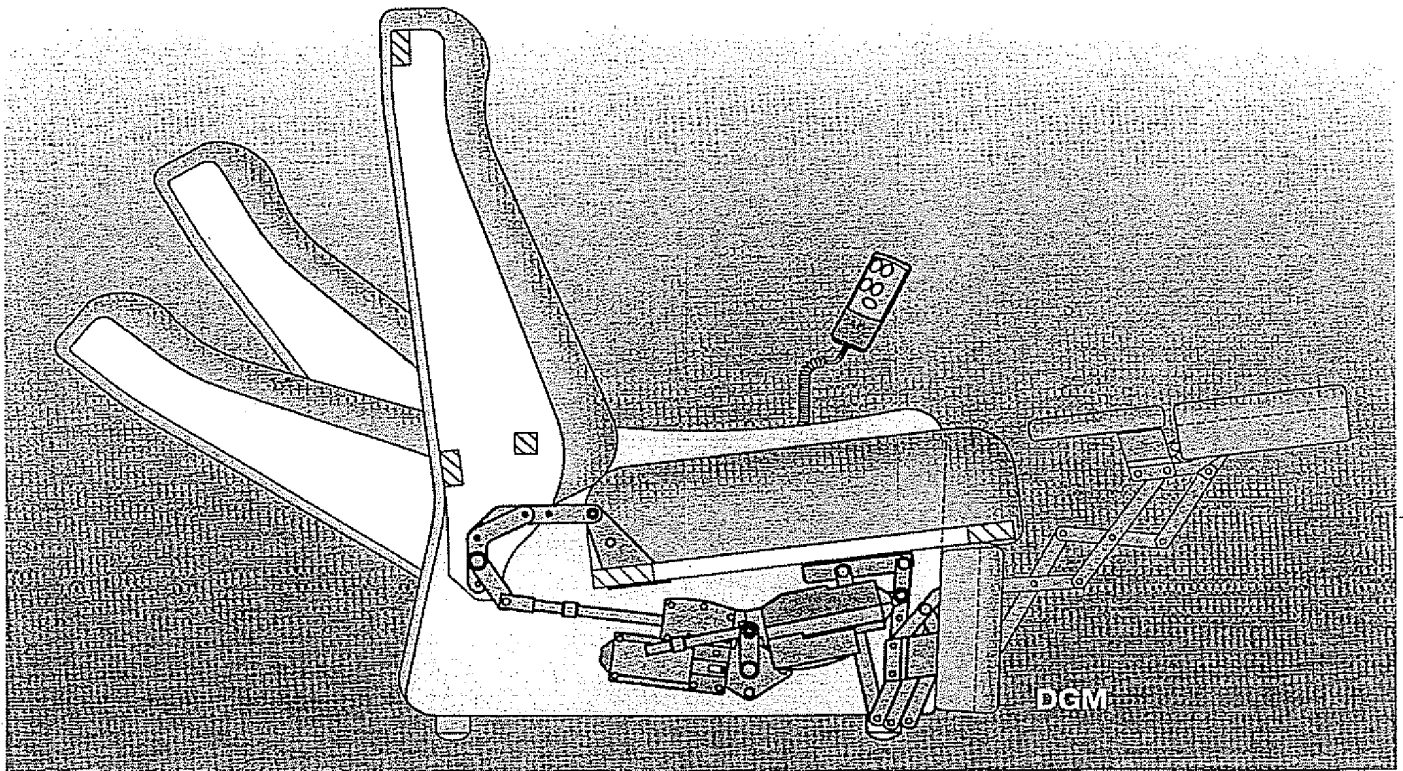

Relaxing Chairs

TR-line

**Functional fittings for
single and multi seaters**

with T-cushion

seat / armrests **connected solidly**
back / footrest are **adjusted separately**

adjustment optional

- ⊗ manual: by loop, int. or ext. handle
- ⊗ motorised (by 2 motors)

on request with

- ⊗ motor lift
- ⊗ built-in foot stool (with / without massage motor)
- ⊗ extended footrest
- ⊗ K.D. back for easy transport

For further information
please request under

AF 12

Ruhesessel

vario set

Funktionsbeschläge für Einzelsessel

kombinierte oder getrennte
Verstellung von Rücken- und Sitz-/Fußteil

Verstellung wahlweise


- ⊗ manuell
- ⊗ per Gasfeder (Hebel oder Schlaufe)
- ⊗ motorisch (1 oder 2 Motoren)

auf Wunsch mit

- ⊗ Starthilfe
- ⊗ Aufstehhilfe
- ⊗ Schutzabdeckung (für Fußteilschere)
- ⊗ Fußteilklappe (mit/ohne Massagemotor)

Weitere Informationen
bitte anfordern unter **AF 14**

basic
combi
multi

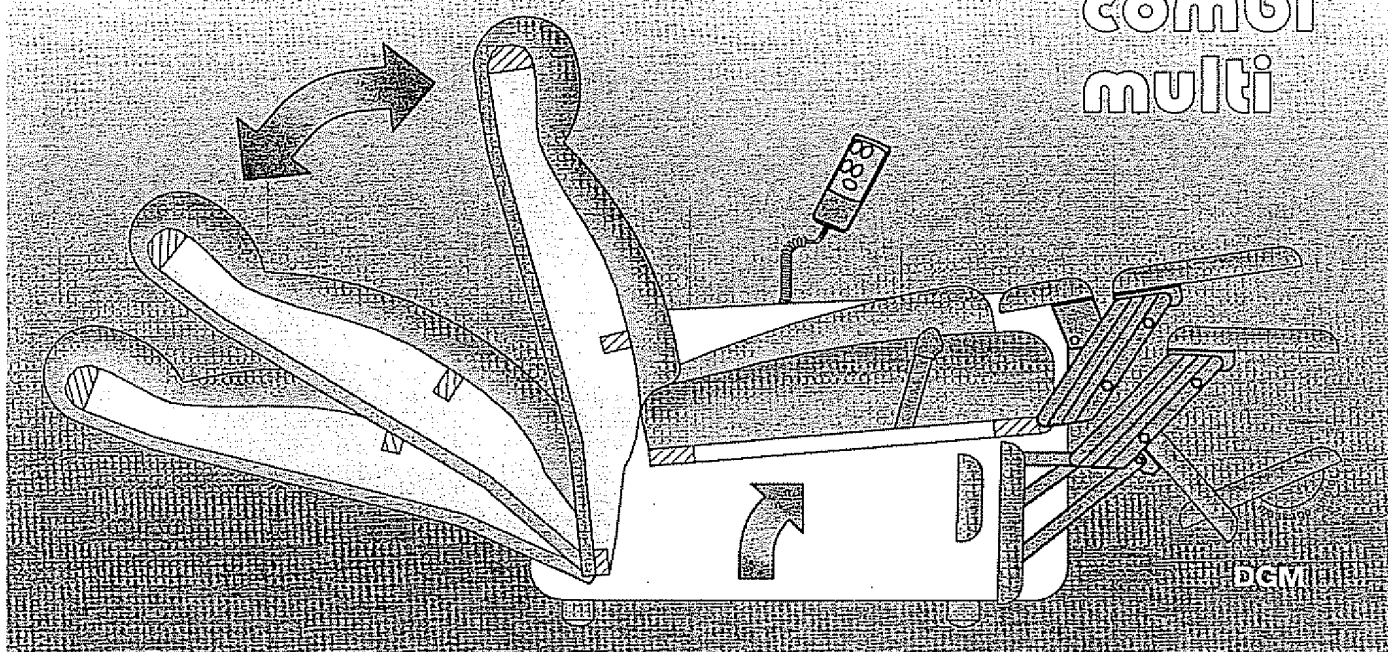

Relaxing Chairs

vario set

Functional fittings for single seaters

combined or separate
adjustment of back and seat-/footpart

adjustment optional

- ⊗ manual
- ⊗ by gas spring (lever or loop)
- ⊗ motorised (1 or 2 motors)

on request with

- ⊗ assisted start
- ⊗ motor lift
- ⊗ safety guard (for footrest scissors)
- ⊗ built-in foot stool (with/without massage motor)

For further information
please request under **AF 14**

Ruhesessel

vario set

Zusatzfunktionen

Fußauflage

- ⊗ zur Entlastung der Oberschenkel

Schutzabdeckung

- ⊗ sicher und formschön




Starthilfe

- ⊗ bequeme Auslösung des Fußteils mittels Hebel zwischen Sitz und Armlehne – für alle manuellen **vario**-Ausführungen

Fußteilverlängerung

- ⊗ um 8 cm, für maximale Liegefläche (nur in Verbindung mit doppeltem Fußteil)

Weitere Informationen
bitte anfordern unter **AF 14**

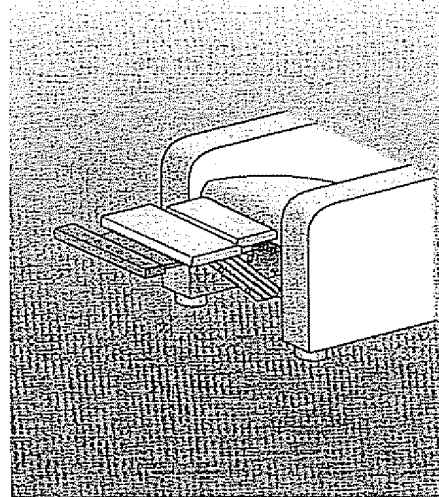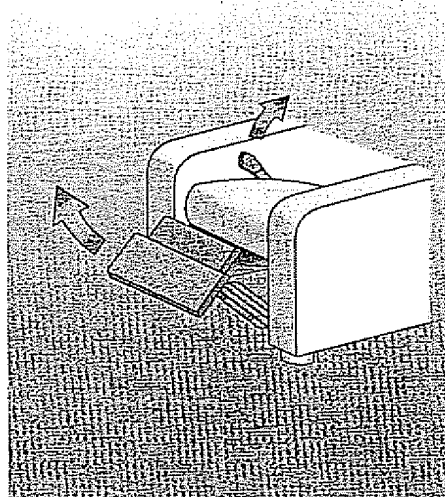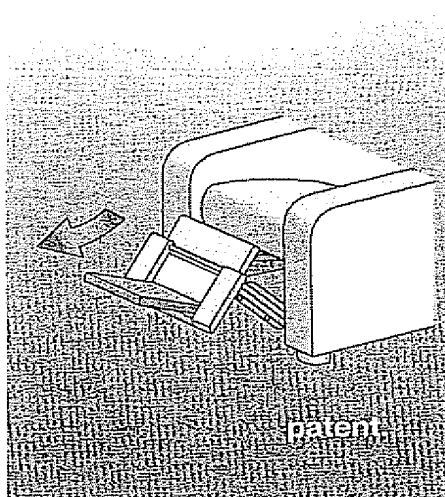

Relaxing Chairs

vario set

additional functions

separate footrest

- ⊗ to relieve the thighs

safety guard

- ⊗ safe and stylish

assisted start

- ⊗ comfortable footrest release with the lever between seat and armrest – for all manual **vario**-versions

footrest extension

- ⊗ 8 cm, for maximum horizontal length (only with double footrest)

For further information
please request under **AF 14**

Ruhesessel

lubra®glider

Stahlrohrgestelle für
1-2-3-Sitzer

- ⊗ 3 verschiedene Rückenformen
- ⊗ 3 verschiedene Breiten
- ⊗ auf Wunsch mit montierten Sitz-Wellenfedern


Sitz und Rücken wahlweise

- ⊗ fest verbunden
- ⊗ mit **easy-glider** Sitzwinkel-Verstellung
- ⊗ mit stufenlos arretierbarer Sitzwinkel-Verstellung
- ⊗ mit **incliner**-Funktion – wandfrei –
manuelle oder motorische Verstellung

Alle Ausführungen sind untereinander
kombinierbar.

Weitere Informationen
bitte anfordern unter

AF 01

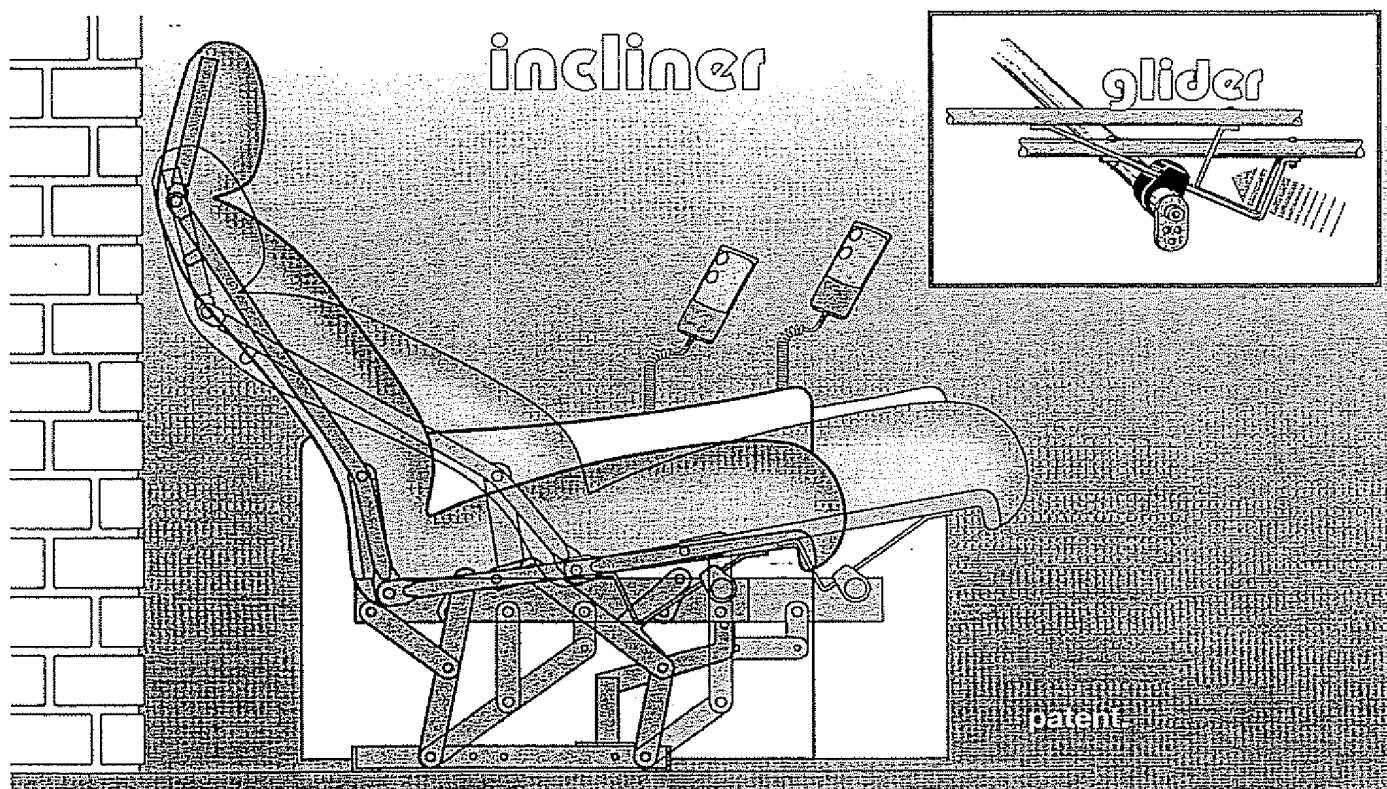

Relaxing Chairs

lubra®glider

Tubular steel frames for
1-2-3-Seaters

- ⊗ 3 different back shapes
- ⊗ 3 different sizes
- ⊗ seat springs fitted on request

seat and back optional

- ⊗ as fixed connection
- ⊗ with **easy-glider** seat angle adjustment
- ⊗ seat angle adjustment with variable locking
- ⊗ with **incliner**-function – wall-away –
manual adjustment or by motor

Among the versions all combinations
are possible.

For further information
please request under

AF 01


Ruhesessel

mit **Einzelfunktionen**

Zusatzfunktionen für Ruhesessel

- ⊗ Sitzverstellung
(mit 6 Rastungen)

Weitere Informationen
bitte anfordern unter **AS 22**

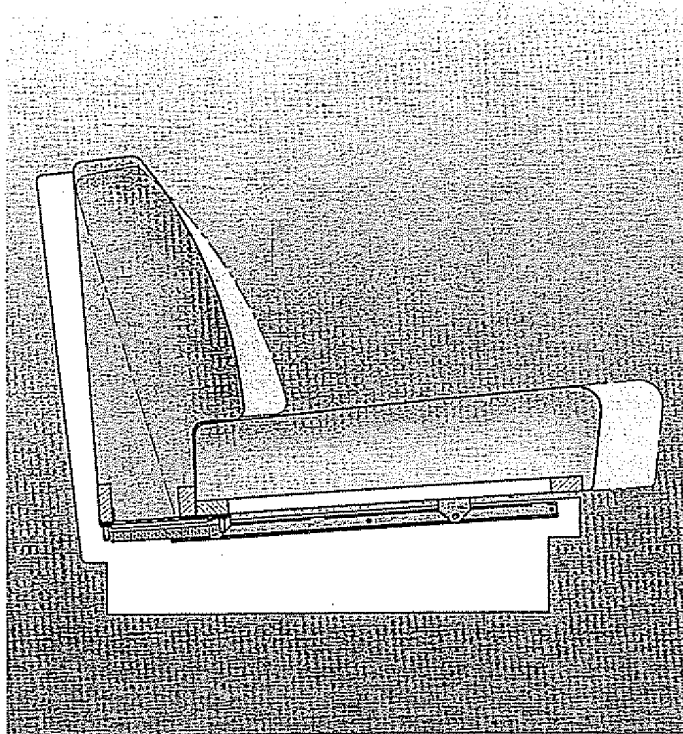


Rückenlehnen-Beschlag

Verstellung mittels Gasfeder

Auslösung

- ⊗ per Handschalter
oder
- ⊗ rechter bzw. linker Schlaufe

Weitere Informationen
bitte anfordern unter **AV 38**

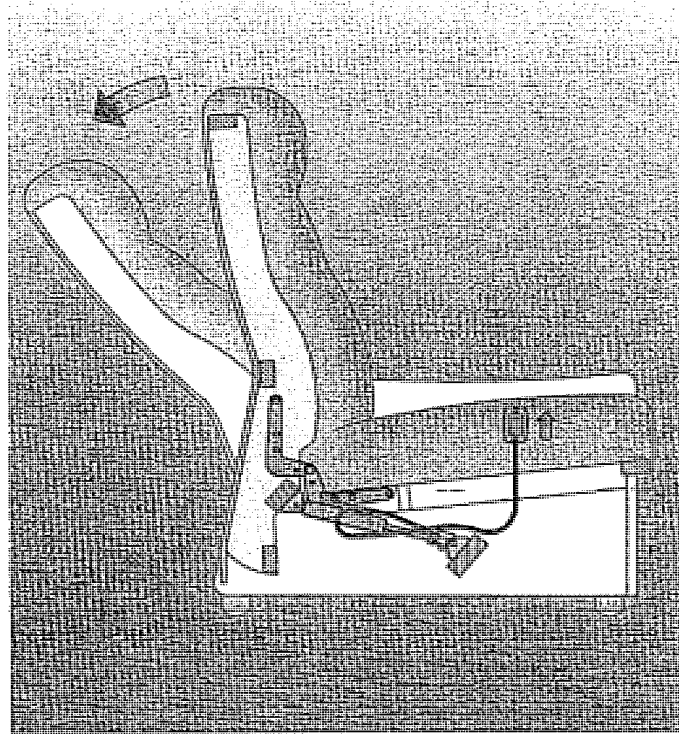

Relaxing chairs

with **single operations**

additional functions for relaxing chairs

- ⊗ seat adjustment
(with 6 positions)

For further information
please request under **AS 22**

backrest fitting

adjustment by gas spring

operation

- ⊗ by hand switch
or
- ⊗ right hand / left hand loop

For further information
please request under **AV 38**

Funktionsbeschläge für


Sofabetten und Betten

In allen gängigen Varianten,
Millionenfach bewährt und in Top-Qualität.

Zur weiteren Information schicken wir Ihnen
gern **Sonderprospekte und Zeichnungen**
mit Maßen und Bohrbildern.

Holzgestelle mit montierten Beschlägen
liefern wir zum Selbstkostenpreis auf Anfrage.

Gepolsterte Prototypen finden Sie in unserer
Ausstellung. Herzlich willkommen!

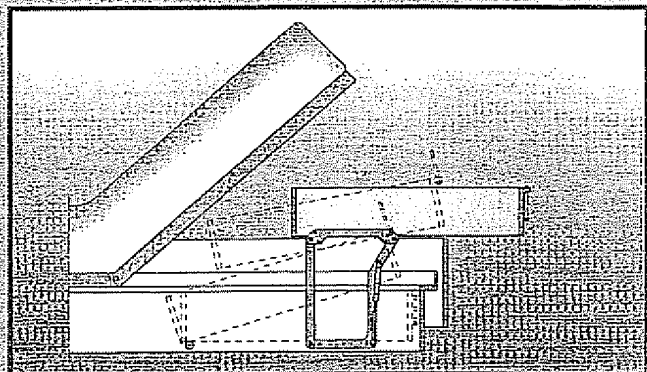

Functional fittings for





Sofabeds and Beds

In all common variations. Proven to be of top
quality over a million times.

For further information we will be pleased
to send you **detailed leaflets** showing
measurements and drill patterns.

Timber frames with mounted fittings can be
supplied on request at cost.

Upholstered prototypes you will find in our
showroom. We would be glad to welcome you.

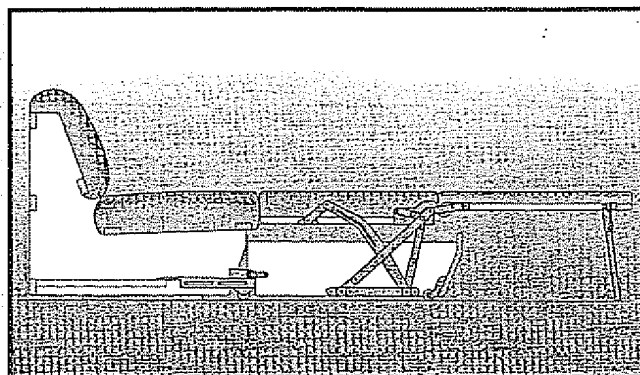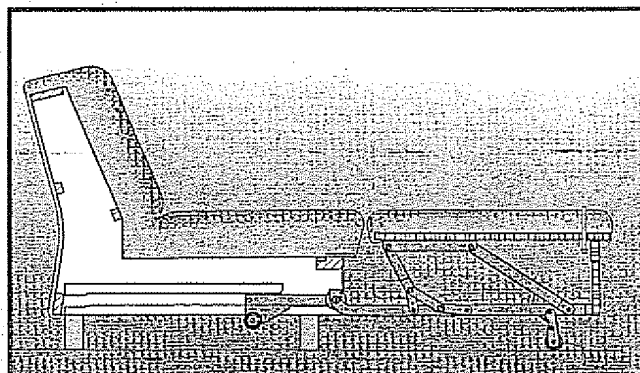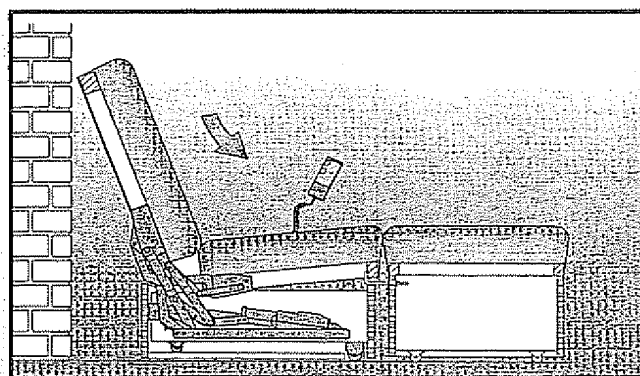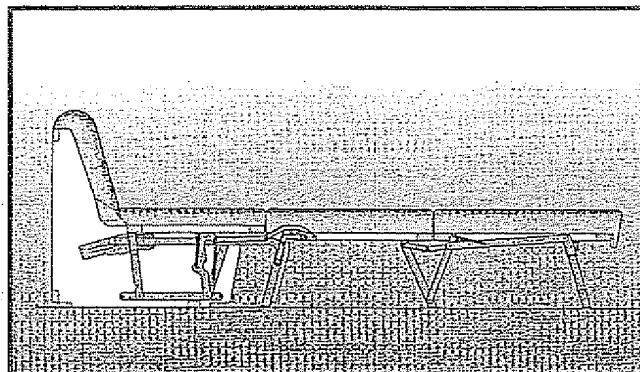

Sofabetten


Funktionsbeschläge für
bodenfreie
Polstereckgruppen

- ⊗ Querschläfer
- ⊗ schlafen in Sitzhöhe
- ⊗ feststehender Sitz und Rücken
- ⊗ Sitzhöhe ca. 42 cm
- ⊗ Bautiefe ca. 75 – 85 cm
- ⊗ große Liegebreite
- ⊗ Bodenrollen mit weicher Lauffläche

bodenfrei wahlweise

- ⊗ 10 cm
- ⊗ 12 cm
- ⊗ fester oder schwenkbarer Fuß

Weitere Informationen
bitte anfordern unter **BC 06**

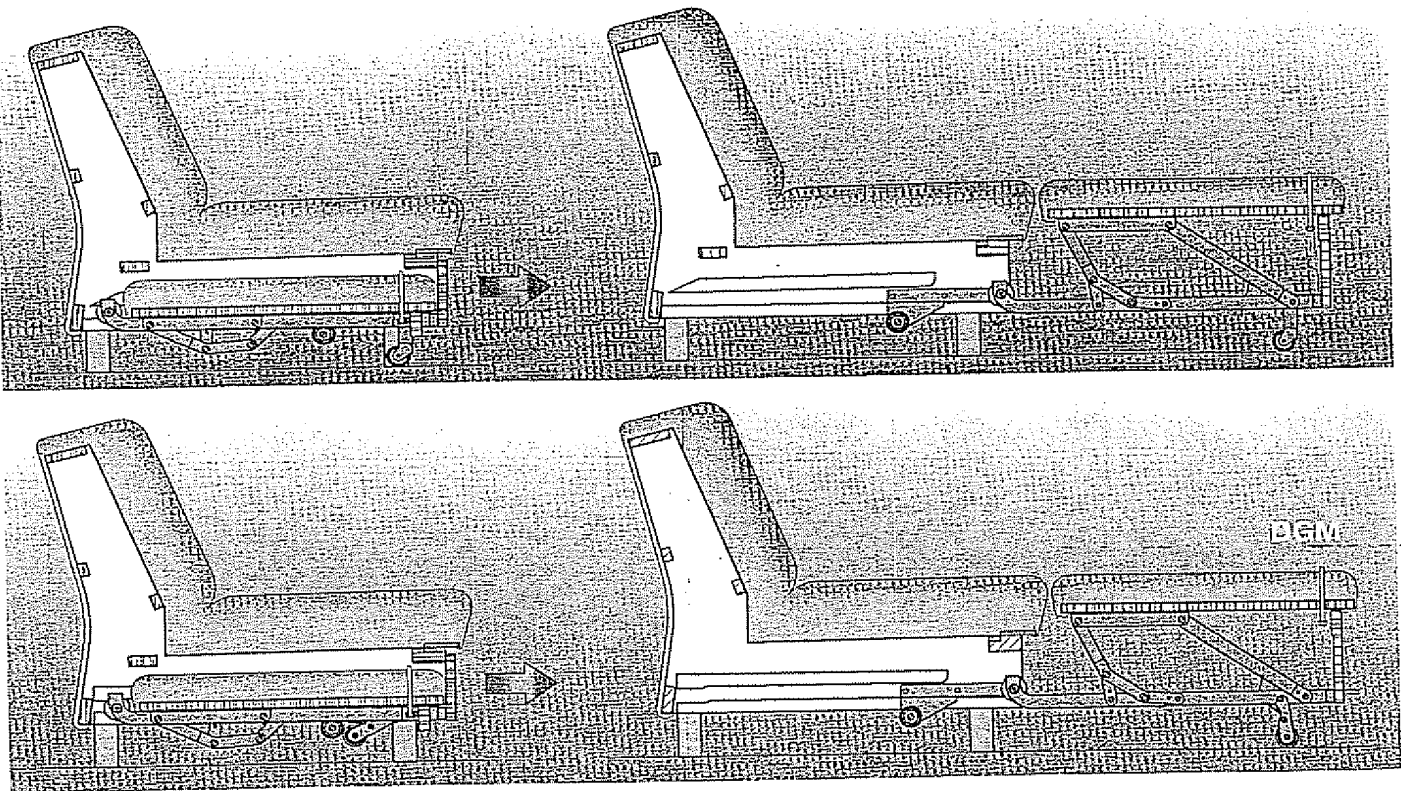

Sofabeds

Functional fittings for
high leg
corner unit ranges

- ⊗ cross sleeper
- ⊗ sleeping at seat height
- ⊗ fixed seat and back
- ⊗ height of seat approx. 42 cm
- ⊗ frame depth approx. 75 – 85 cm
- ⊗ large sleeping area
- ⊗ smooth running floor castors

high leg version optional

- ⊗ 10 cm
- ⊗ 12 cm
- ⊗ fixed or fold – away leg

For further information
please request under **BC 06**

Sofabetten

Funktionsbeschläge für
bodenfreie Zweisitzer
oder Polstergruppen

feststehender Rücken


- ⊗ Rollenfüße schwenken ein
- ⊗ Blendenabstützung schwenkt ein
- ⊗ schlafen in Sitzhöhe – ca. 42 cm
- ⊗ Bautiefe ca. 85 cm
- ⊗ Liegefläche ca. 190 cm
- ⊗ Bodenrollen mit weicher Lauffläche

bodenfrei wahlweise

- ⊗ 10 cm
- ⊗ 12 cm

Weitere Informationen
bitte anfordern unter

BC 07

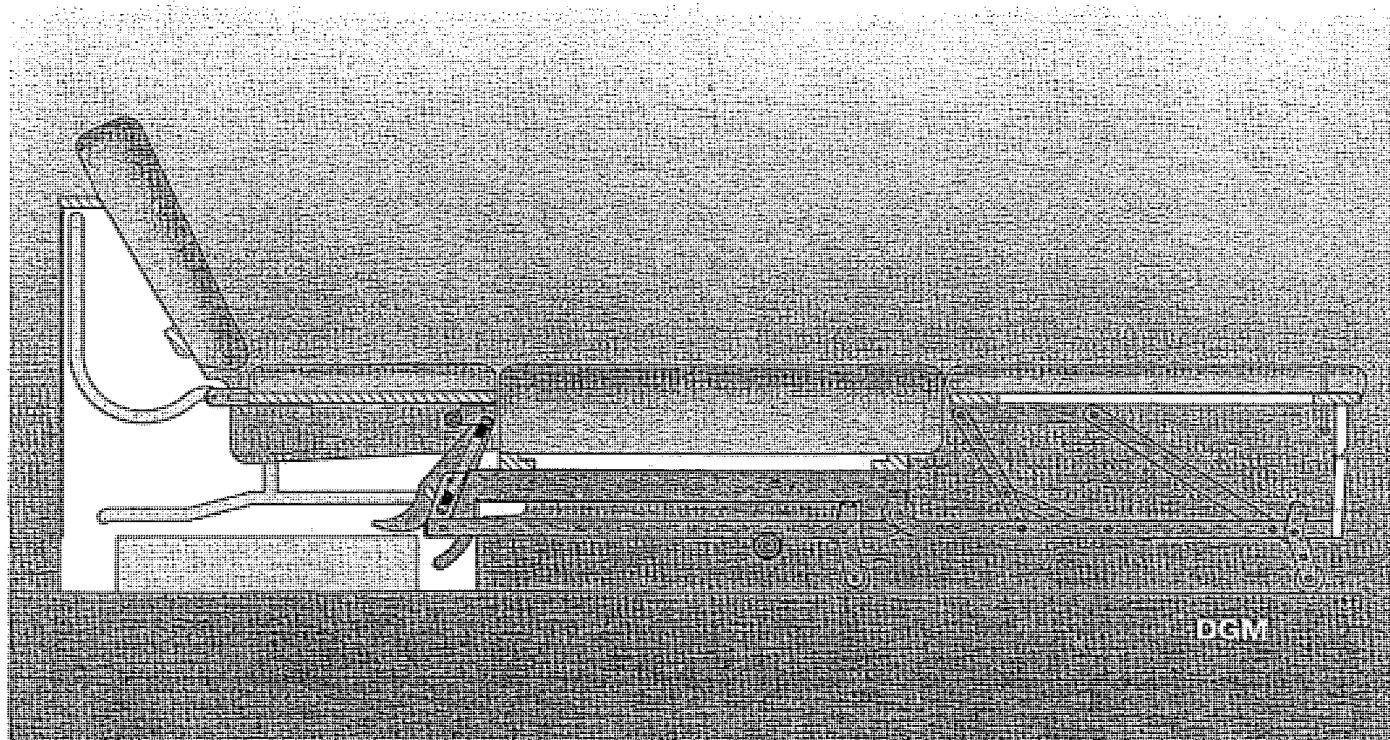

Sofabeds

Functional fittings for
high leg bed settees
or unit ranges

fixed back

- ⊗ castor legs to fold away
- ⊗ support on front panel to fold away
- ⊗ sleeping at seat height – approx. 42 cm
- ⊗ frame depth approx. 85 cm
- ⊗ sleeping length approx. 190 cm
- ⊗ smooth running floor castors

high leg version optional

- ⊗ 10 cm
- ⊗ 12 cm

For further information
please request under

BC 07

Sofabetten

Funktionsbeschläge für
bodenfreie Zweisitzer
oder Polstergruppen



schwenkbarer Rücken oder Schlepprücken

- ⊗ Rollenfüße schwenken ein
- ⊗ Blendenabstützung schwenkt ein
- ⊗ schlafen in Sitzhöhe – ca. 42 cm
- ⊗ Bautiefe ca. 85 cm
- ⊗ Liegefläche ca. 190/200 cm
- ⊗ Bodenrollen mit weicher Lauffläche

bodenfrei wahlweise

- ⊗ 10 cm
- ⊗ 12 cm

Weitere Informationen
bitte anfordern unter **BC 07**

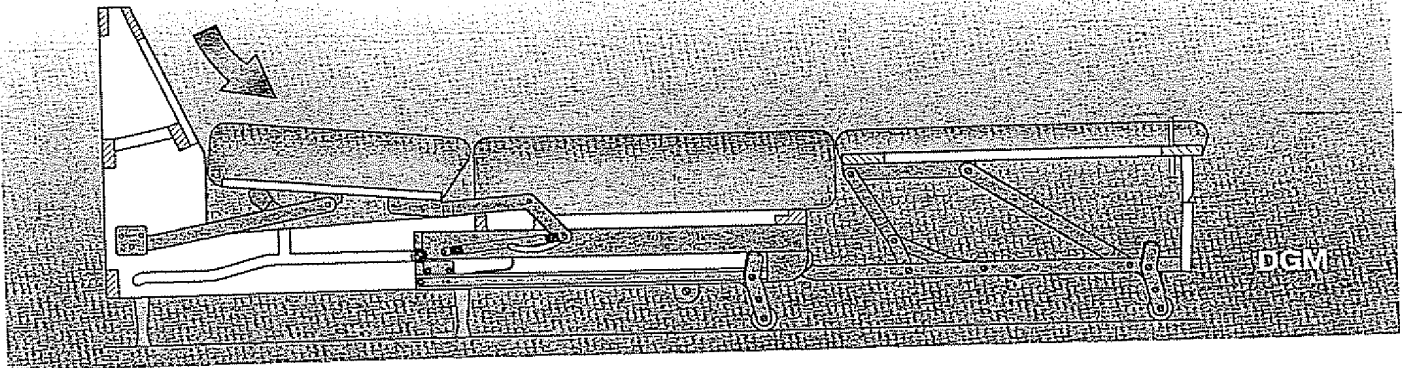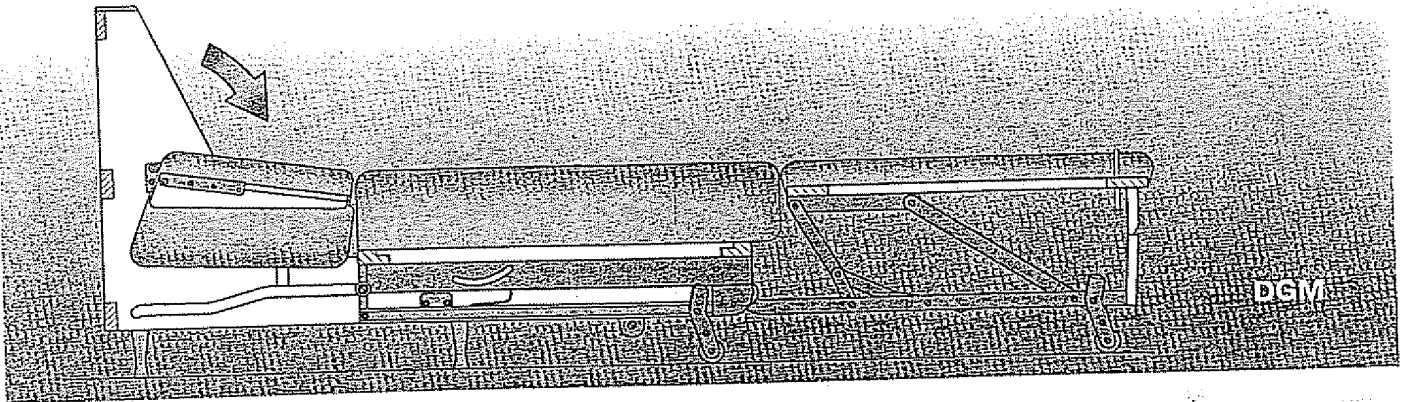

Sofabeds

Functional fittings for
high leg bed settees
or unit ranges

turnable back or trucking back

- ⊗ castor legs to fold away
- ⊗ support on front panel to fold away
- ⊗ sleeping at seat height – approx. 42 cm
- ⊗ frame depth approx. 85 cm
- ⊗ sleeping length approx. 190/200 cm
- ⊗ smooth running floor castors

high leg version optional

- ⊗ 10 cm
- ⊗ 12 cm

For further information
please request under **BC 07**

Sofabetten

Funktionsbeschlag für

Zweisitzer oder
Polstergruppen

- ⊗ schlafen auf Drell
- ⊗ keine Rollen am Boden
- ⊗ schlafen in Sitzhöhe
- ⊗ feststehender Rücken
- ⊗ Sitzhöhe 42 – 45 cm
- ⊗ Bautiefe ca. 76 cm, Liegelänge ca. 200 cm


auf Wunsch mit

- ⊗ Metallsitzrahmen inkl. Federn
- ⊗ Metallzargen für Holzsitzrahmen

Zwischenstreben

sind – je nach Breite des Sofas – separat
zu bestellen

Weitere Informationen
bitte anfordern unter **BC 04**

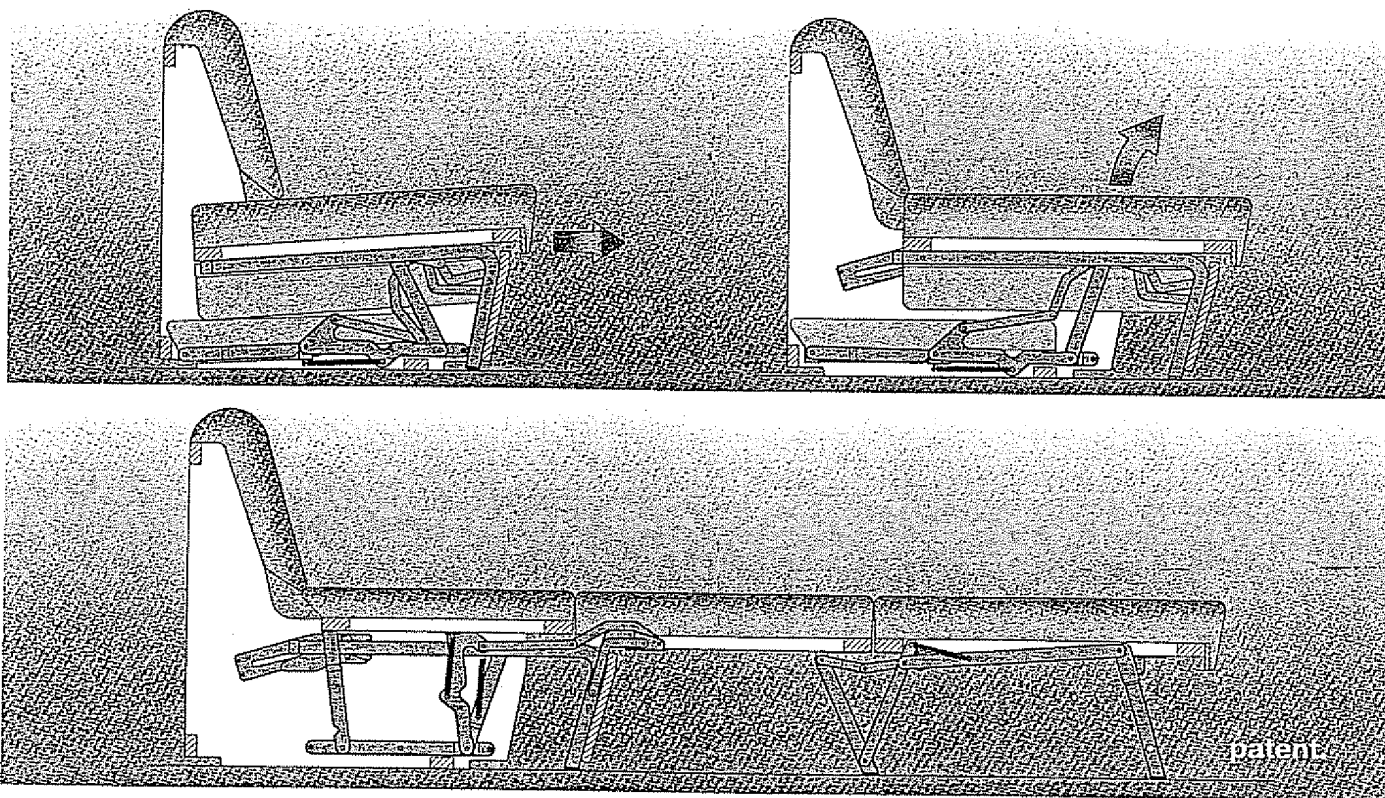

Sofabeds

Functional fitting for
bed settees or
unit ranges

- ⊗ sleeping on ticking
- ⊗ no castors on the ground
- ⊗ sleeping at seat height
- ⊗ fixed back
- ⊗ height of seat 42 – 45 cm
- ⊗ frame depth approx. 76 cm,
bed length approx. 200 cm

on request with

- ⊗ metal seat frame incl. springs
- ⊗ construction bars for wooden seat frame

intermediate rail

to be ordered separately – for sizes –

For further information
please request under **BC 04**

Sofabetten

Funktionsbeschlag für


Zweisitzer oder
Polstergruppen

- schlafen in Sitzhöhe
- feststehender Sitz und Rücken
- Sitzhöhe 42 – 45 cm
- Bautiefe 80 – 85 cm
- Liegelänge ca. 200 cm

Fußteillbügel

sind – je nach Größe – separat zu bestellen

Weitere Informationen
bitte anfordern unter **BC 02**

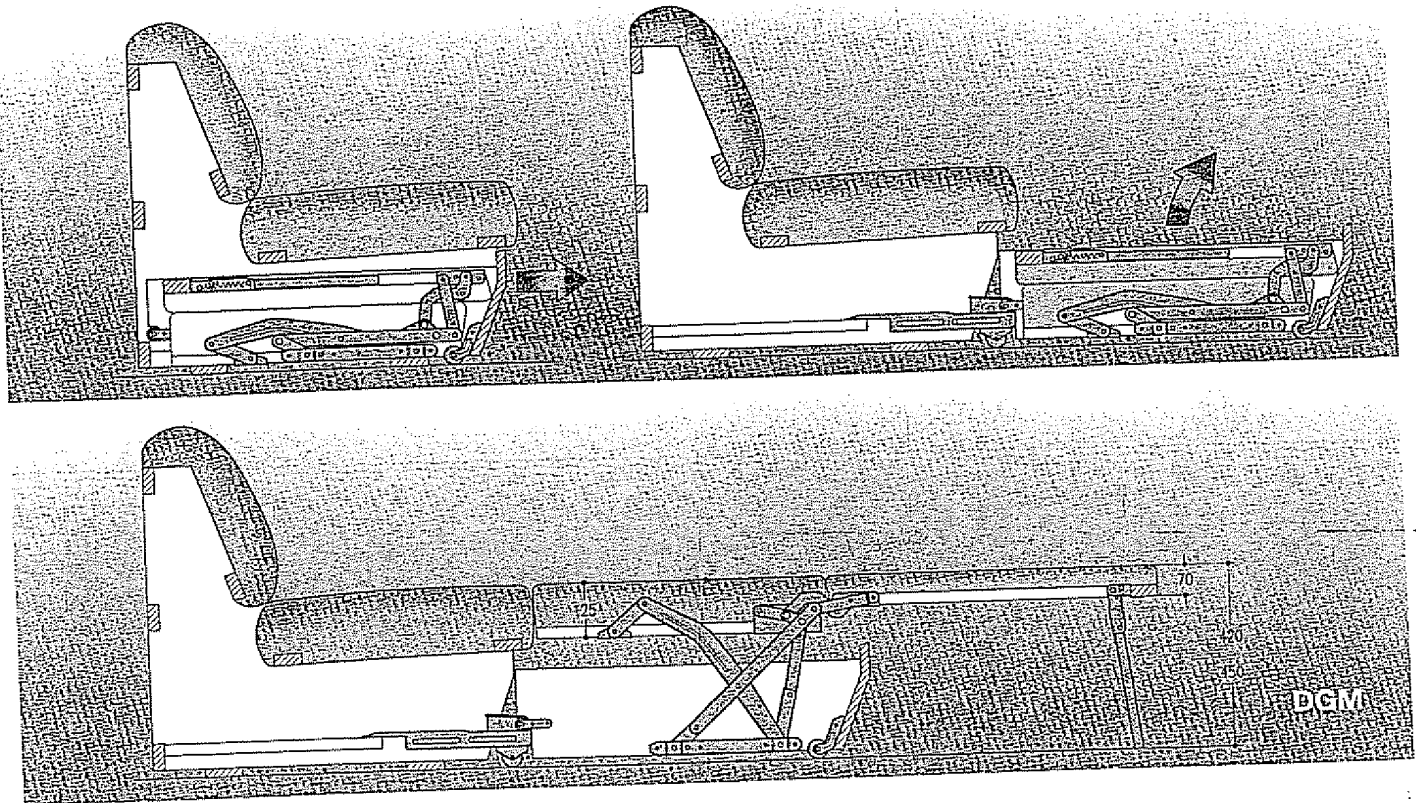

Sofabeds

Functional fitting for
bed settees or
unit ranges

- sleeping at seat height
- fixed seat and back
- height of seat 42 – 45 cm
- frame depth 80 – 85 cm
- bed length approx. 200 cm

footrest bar

to be ordered separately – for sizes –

For further information
please request under **BC 02**

Sofabetten

Funktionsbeschläge für

Kippcouches

in allen gängigen Varianten

normale Polsterung

- Festpolster ca. 12 cm

hohe Polsterung

- Festpolster ca. 14 – 16 cm

universal Polsterung


- mit theoretischem Drehpunkt
lose Kissen oder Festpolster
mit oder ohne Armlehnen

auf Wunsch mit

- Bettkastenhebebeschlag zum bequemen Erreichen des Bettkastens

Weitere Informationen
bitte anfordern unter

CD 11

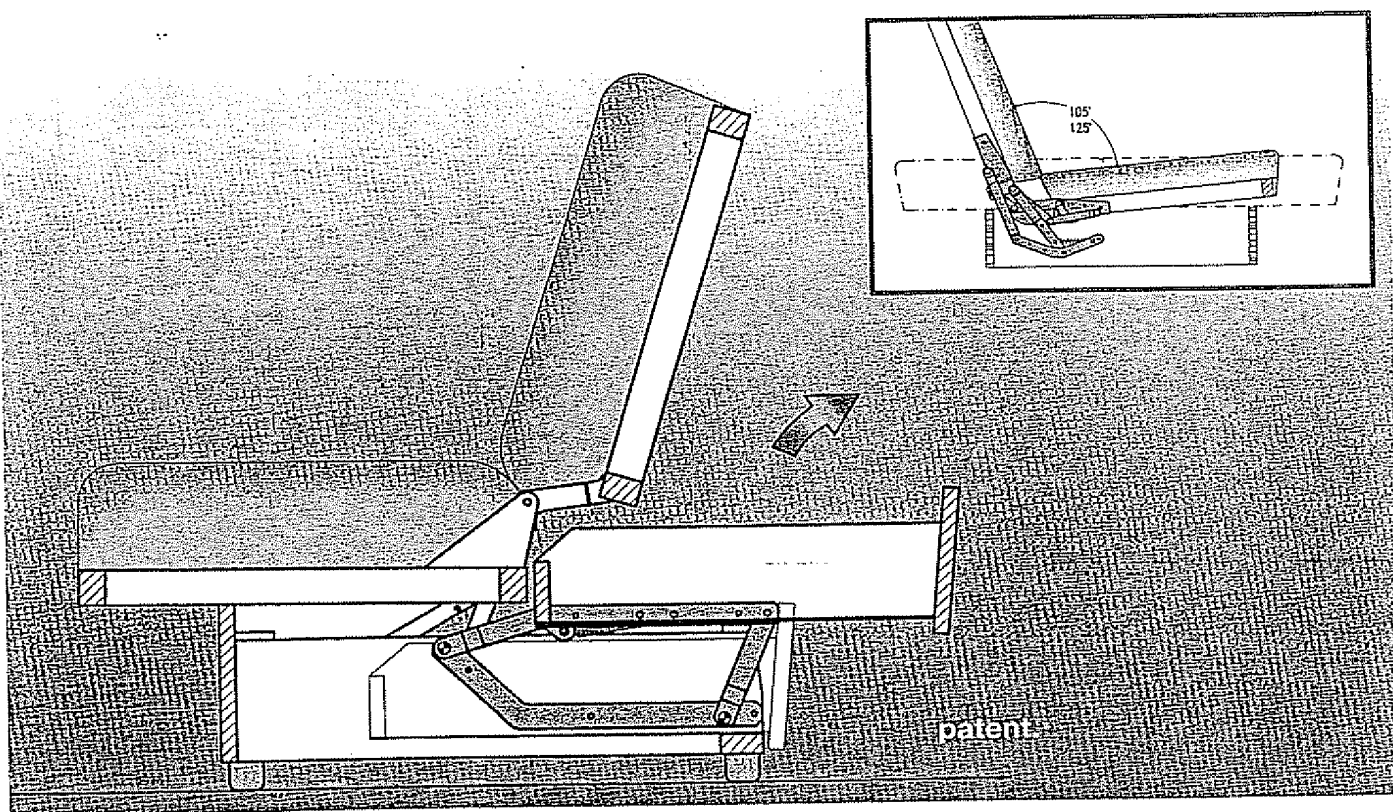

Sofabeds

Functional fittings for

click-clack couches

in all common variations

normal upholstery

- fixed upholstery approx. 12 cm

thick upholstery

- fixed upholstery approx. 14 – 16 cm

universal upholstery

- with theoretical pivot point
loose cushions or fixed upholstery
with or without armrests

on request with

- lift fitting for bedding stores for convenient access to bedding store

For further information
please request under

CD 11


Sofabetten

Funktionsbeschläge für
Sofas mit Ottomane

in Kombination
mit Kippcouches

- ⊗ extrem hoher Rücken schwenkt wandfrei
- ⊗ große Liegefläche, hohe Standfestigkeit
- ⊗ leicht zugänglicher Bettkasten
- ⊗ keine überstehenden Beschlagteile am Rahmen, d.h. wahlweise mit oder ohne Armlehnen

Weitere Informationen
bitte anfordern unter **CD 17**

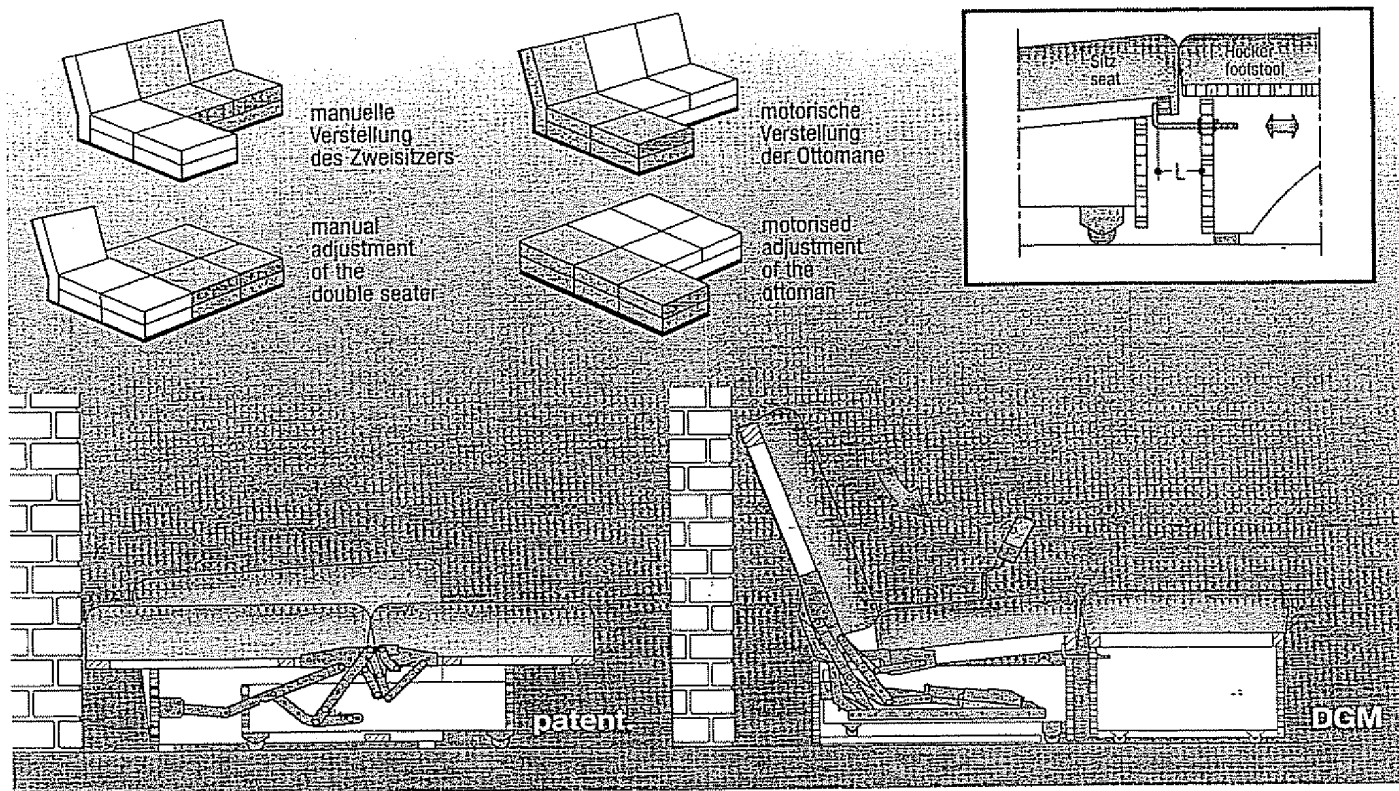

Sofabeds

Functional fittings for
sofas with ottoman

in combination
with click-clack couches

- ⊗ exaggerated back height, wall-away motion
- ⊗ large sleeping area, excellent stability
- ⊗ bedding store easily accessible
- ⊗ no projecting parts above the frame, that means, choice of style, options: with or without armrests

For further information
please request under **CD 17**

Sofabetten

Funktionsbeschläge für

Zweisitzer oder
Polstergruppen

mit schwenkbarem oder
feststehendem Rücken


- ⊗ schlafen in Sitzhöhe
- ⊗ Bautiefe ca. 82 cm, Liegelänge ca. 200 cm
- ⊗ leichtgängiger und dauerhaft präziser Funktionsablauf durch kombinierte Holz-Stahlrohr-Konstruktion

auf Wunsch mit




- ⊗ Metallrahmen mit montierten Federholz-
leisten für Sitz- und Fußteil lieferbar

Weitere Informationen
bitte anfordern unter

BC 12

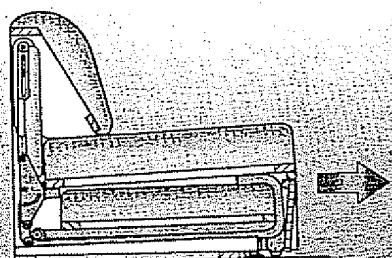

lubraflex

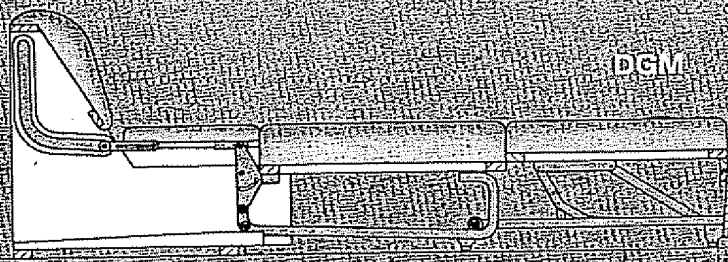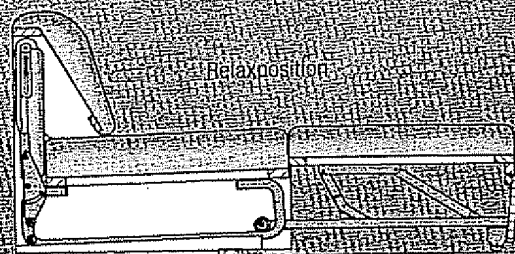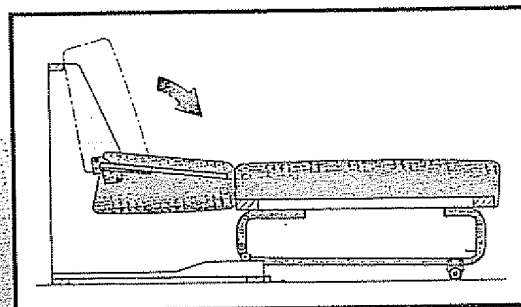

Sofabeds

Functional fittings for
bed settees or
unit ranges

with turnable or
fixed back

- ⊗ sleeping at seat height
- ⊗ frame depth approx. 82 cm,
bed length approx. 200 cm
- ⊗ smooth and lasting precise operation
due to combined wood and steel frame
construction

on request with

- ⊗ metal frames with wooden slats mounted
for seat and footrest

For further information
please request under

BC 12

Sofabetten

mit **Einzelfunktionen**


Funktionsbeschläge zur Vergrößerung der Liegefläche

manuell oder motorisch

- feststehender Rücken
- geräumiger Bettkasten

* Falls erforderlich, ist ein Stützbügel einzusetzen.


Weitere Informationen
bitte anfordern unter **BH 10**

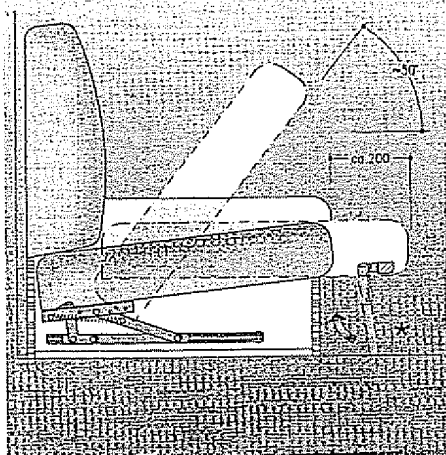

Funktionsbeschlag zum Verstellen des Rückens

- 4 Verstellpositionen zum Sitzen, Liegen und Entspannen

Weitere Informationen
bitte anfordern unter **BC 01**

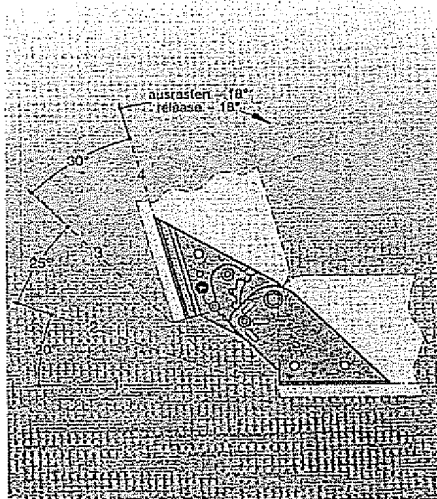


Schwenkbeschläge

Auszug aus unserem Lieferprogramm

- leichtgängige Funktion
- max. Polsterung des Auszugteils (in Ecksofas) möglich
- schlafen in Sitzhöhe
- Polsterhöhe bis ca. 12 cm

Weitere Informationen
bitte anfordern unter **KE 17**

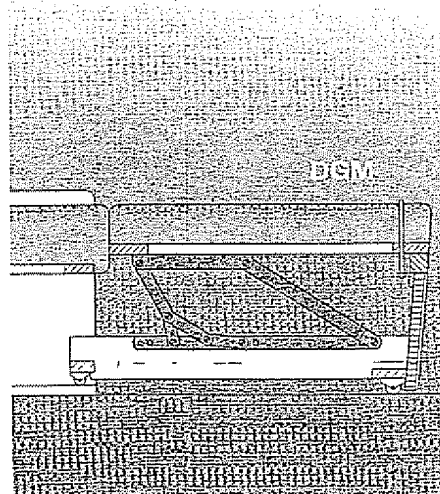

Sofabeds

with **single operations**

functional fittings to enlarge the sleeping area

manual or motorised

- fixed back
- ample bedding store

* If necessary, a support is to be used.

For further information
please request under **BH 10**

functional fitting to adjust the back

- 4-way adjustment for sitting, lying and relaxing

For further information
please request under **BC 01**

lift mechanisms

extract of our manufacturing range

- smooth operation
- allows max. upholstery height for pull-out section (for corner units)
- sleeping at seat height
- height of upholstery up to ~12 cm


For further information
please request under **KE 17**

Bettbeschlag

zur Höhenverstellung
von Einlegerahmen

- zum Ausgleich unterschiedlicher Matratzenstärken bei Doppelbetten
- für individuell einstellbare Liegehöhe bei Einzelbetten
- für geschlossene und belüftete Bettkästen
- Höhenverstellung bis 96 mm möglich
- Rastermaß 16 mm

Weitere Informationen
bitte anfordern unter **BH 16**

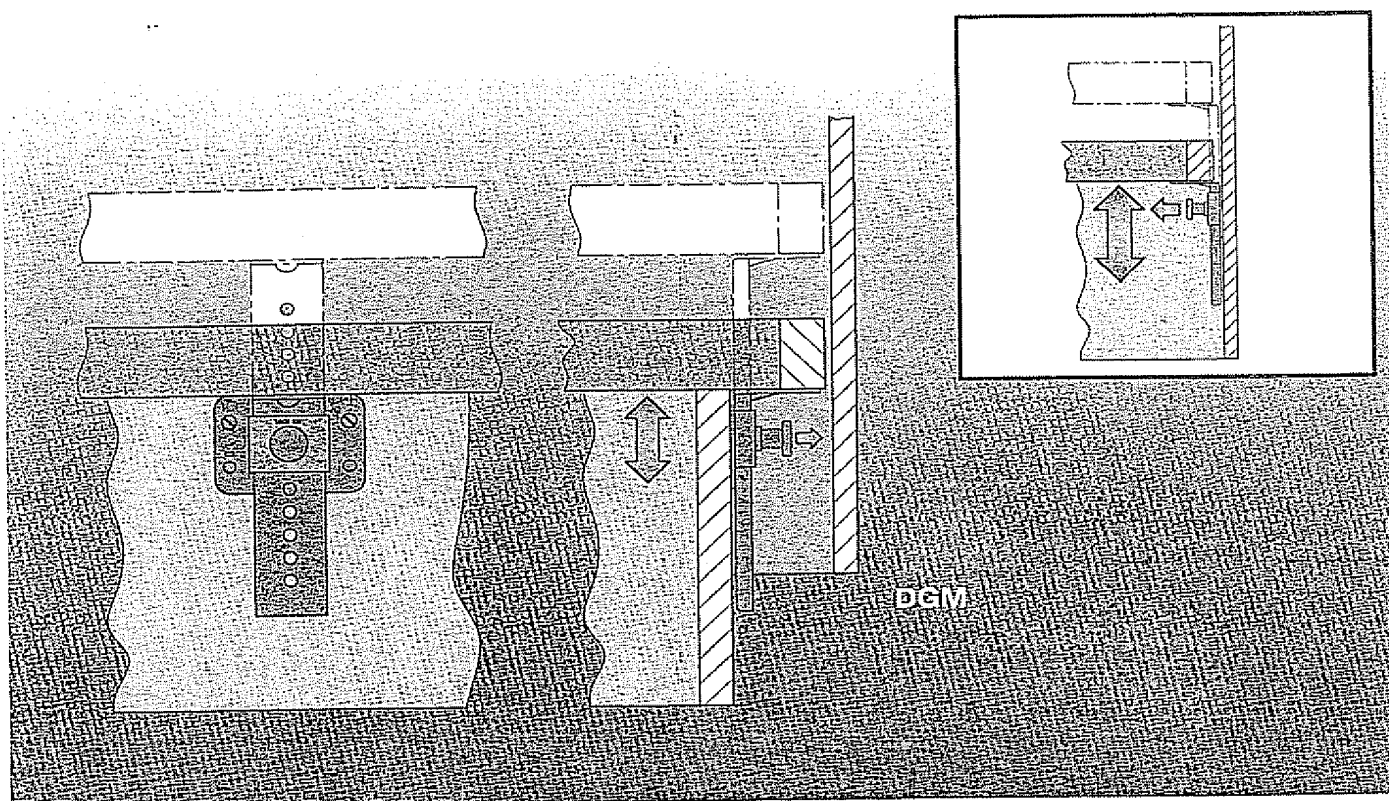

Bed Fitting

level adjustment
for insert frames

- for levelling different mattress heights in double beds
- for individual adjustable sleeping height in single beds
- for closed and ventilated bedding stores
- level adjustment up to 96 mm possible
- structural module 16 mm


For further information
please request under **BH 16**

Bettbeschlag

zum Anheben des
Bettkastens

- bequeme Entnahme des Bettzeugs
- Anheben des Bettkastens um ca. 40 cm
- gasfederunterstützte Funktion
- für geschlossene und belüftete Bettkästen
- Beladung max. 5 kg

Weitere Informationen
bitte anfordern unter **BH 16**

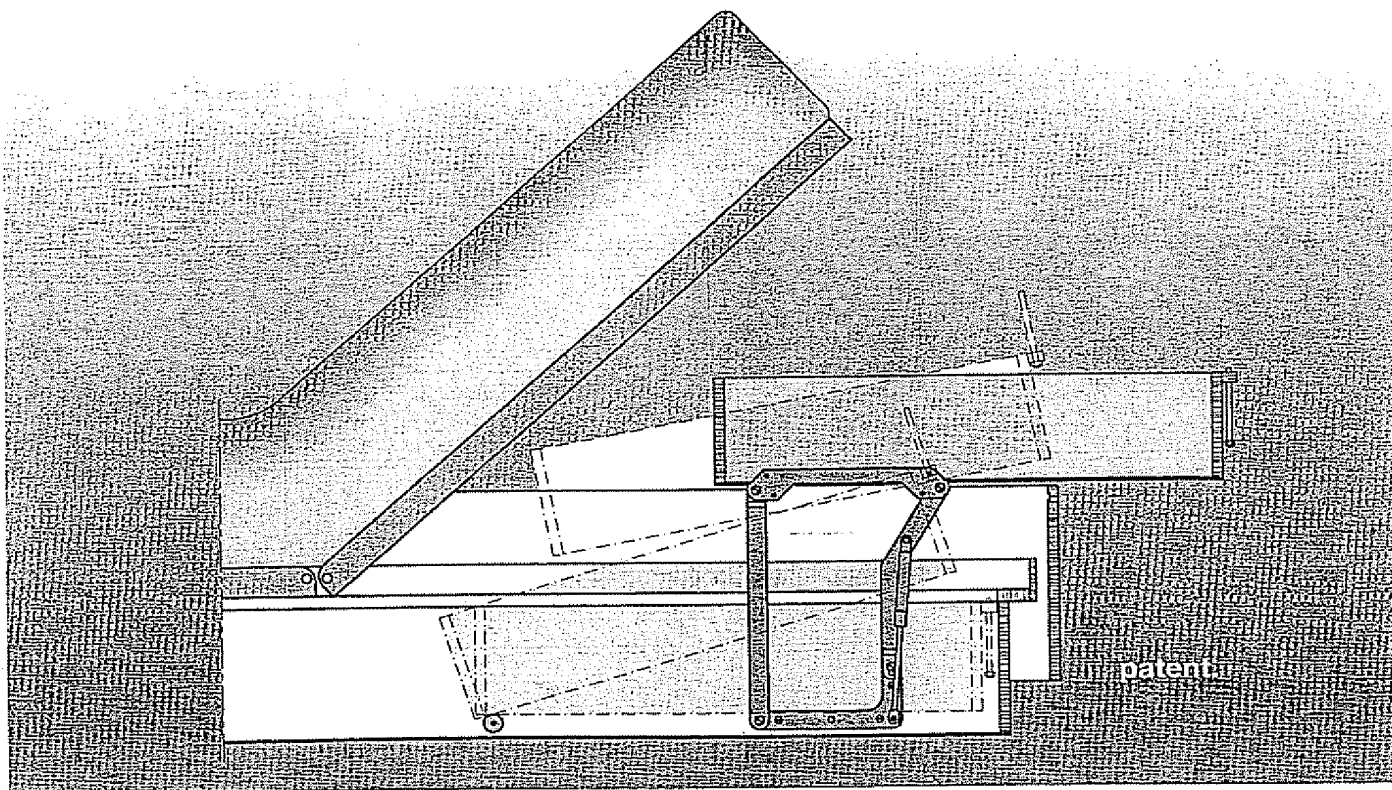

Bed Fitting

to lift the
bedding store

- convenient access of bed linen
- lifting the bedding store approx. 40 cm
- gas spring supported function
- for closed and ventilated bedding stores
- max. load: 5 kg

For further information
please request under **BH 16**


Bettbeschläge

zum Öffnen des Bettkastens
in allen gängigen Varianten

- ⊗ mit Zug- oder Gasfeder
- ⊗ für leichte oder schwere Polsterung
- ⊗ mit verschiedenen Öffnungswinkeln

Die Federn sind – je nach Polsterart –
separat zu bestellen.

Weitere Informationen
bitte anfordern unter **BH 09**

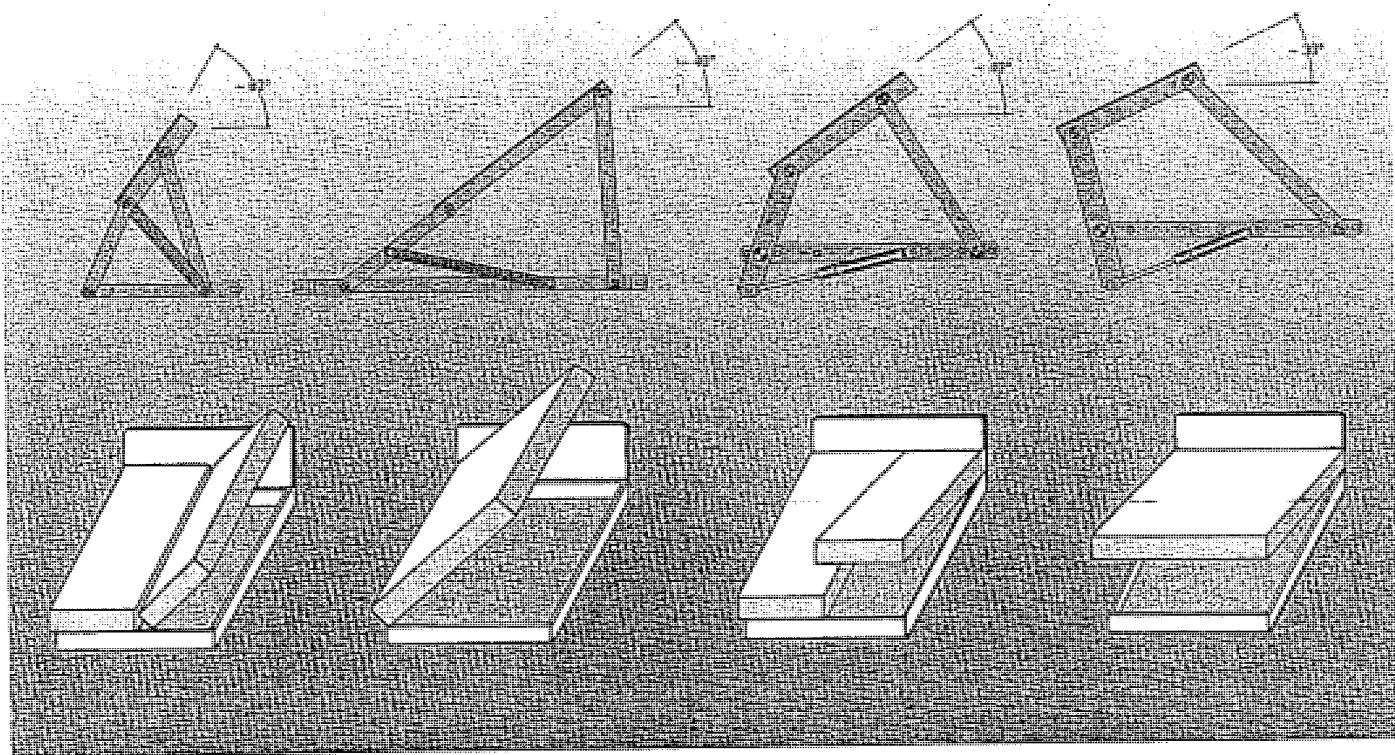

Bed Fittings

for opening the bedding store
in all common variations

- ⊗ by tension or gas spring
- ⊗ for light or heavy mattress
- ⊗ with different opening angles

The springs are to be ordered separately,
depending on method of upholstery.

For further information
please request under **BH 09**

Bettbeschlge


fr Kopfteilverstellungen und Bettkastenffnung

in allen gngigen Varianten

- ⊗ mit Zug- oder Gasfeder
- ⊗ fr mittlere und hohe Belastung
- ⊗ Variante fr abschlagbare Betten lieferbar

Die Federn sind – je nach Belastung –
separat zu bestellen.

Weitere Informationen
bitte anfordern unter **BH 08**

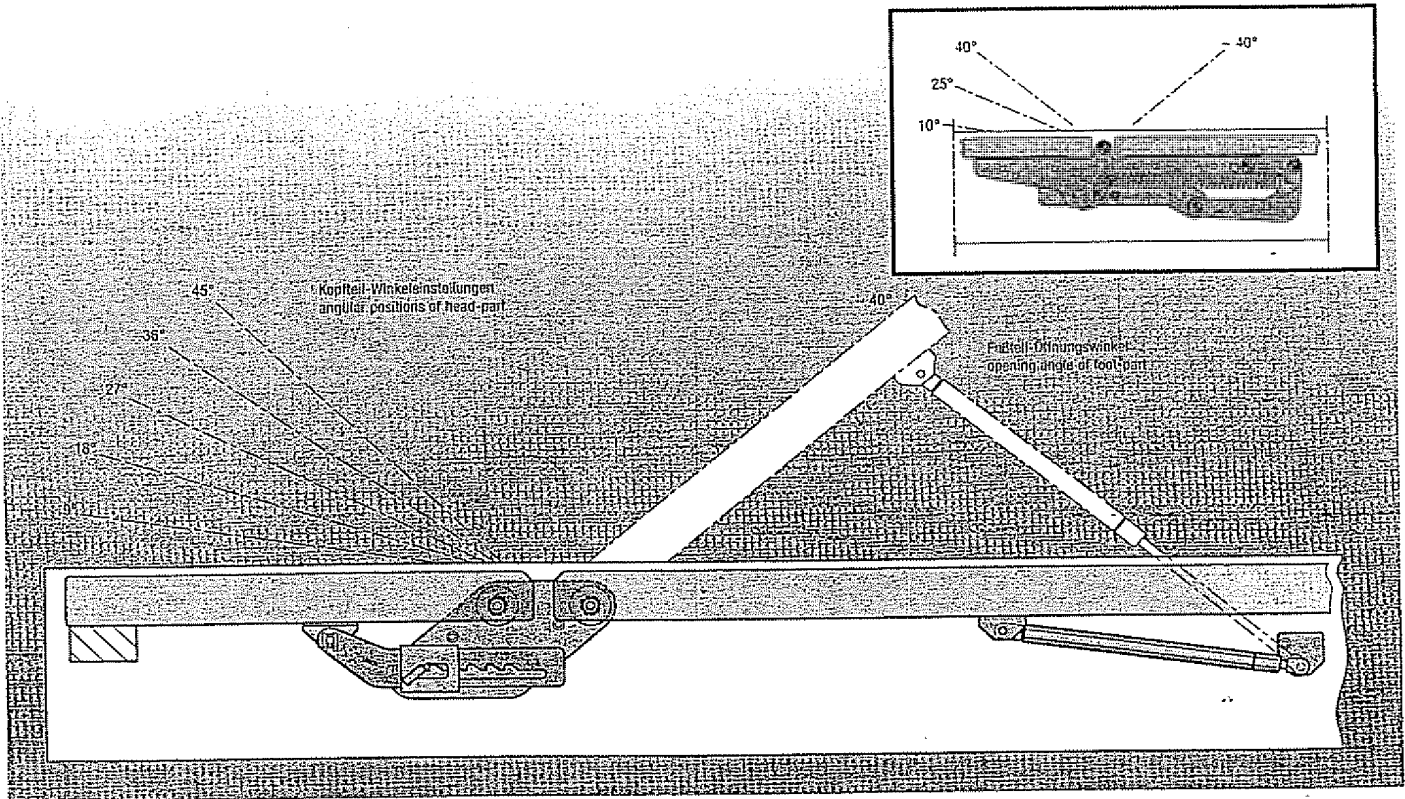

Bed Fittings

for headrest adjustments and opening of the bedding store

in all common variations

- ⊗ by tension or gas spring
- ⊗ for medium and heavy load
- ⊗ variation for K.D. beds available

The springs are to be ordered separately
– matching the load.

For further information
please request under **BH 08**

Bettbeschläge

mit **Einzelfunktionen**

Befestigungswinkel
Rastbeschläge
Liftbeschläge




Steckverbinder
mit Einrastung und Anschlag
auf Wunsch mit
• angenieteten Winkeln

Betthaupt- / Rückenverstellung
• 6 Raststufen
• zugfederunterstützte Funktion

Weitere Informationen
bitte anfordern unter **DA 14**

Weitere Informationen
bitte anfordern unter **DA 12**

Weitere Informationen
bitte anfordern unter **CB 11**

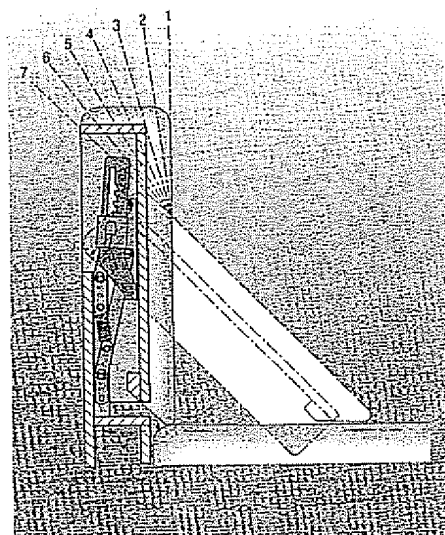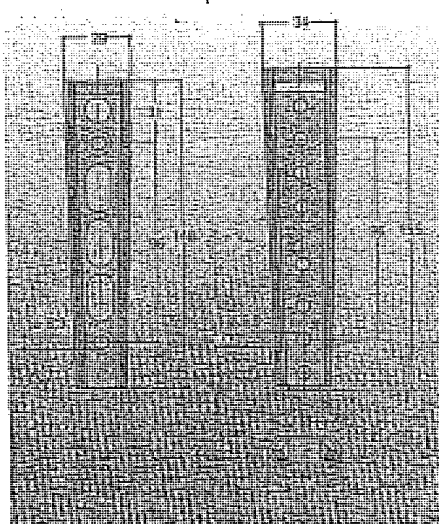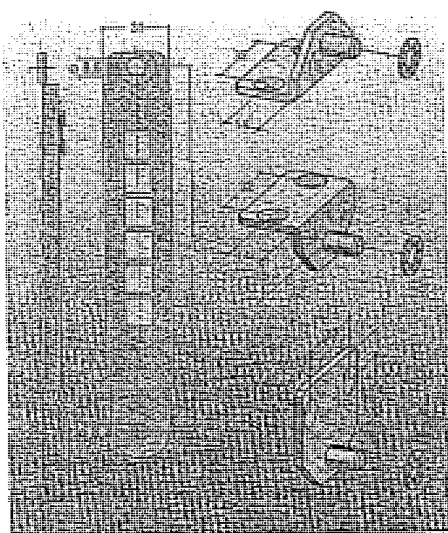

Bed Fittings

with **single operations**

fastening angles
tooth catch fittings
lift fittings

rack connectors
with lock and catch
on request with
• angles riveted on

bed head- / backrest adjustment
• 6 positions
• function supported by tension spring

For further information
please request under **DA 14**

For further information
please request under **DA 12**

For further information
please request under **CB 11**






Polstergelenke und sonstiges Möbelzubehör

in allen gängigen Varianten.
Millionenfach bewährt und in Top-Qualität.

Zur weiteren Information schicken wir Ihnen
gern **Sonderprospekte und Zeichnungen**
mit Maßen und Bohrildern.

Holzgestelle mit montierten Beschlägen
liefern wir zum Selbstkostenpreis auf Anfrage.

Gepolsterte Prototypen finden Sie in unserer
Ausstellung. Herzlich willkommen.

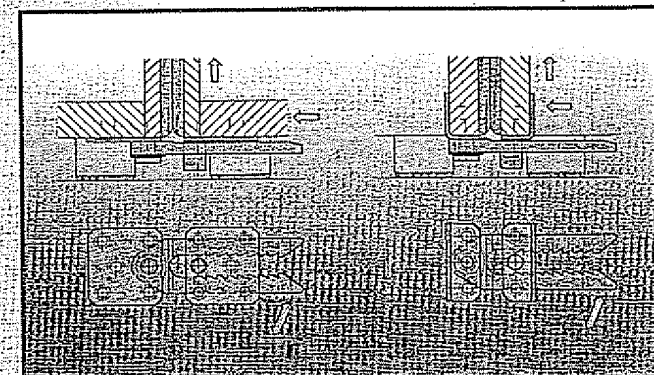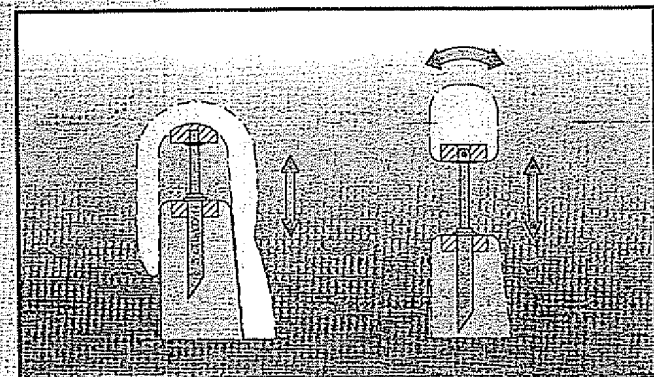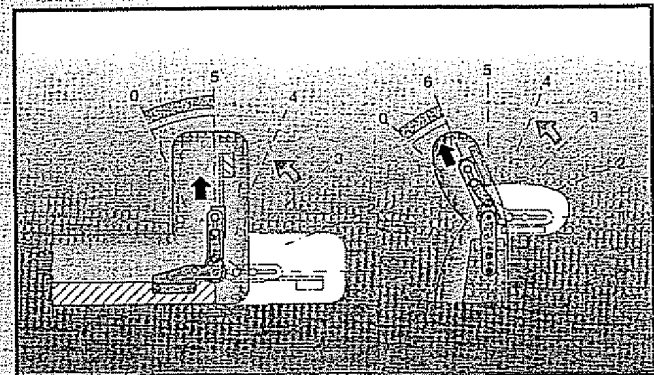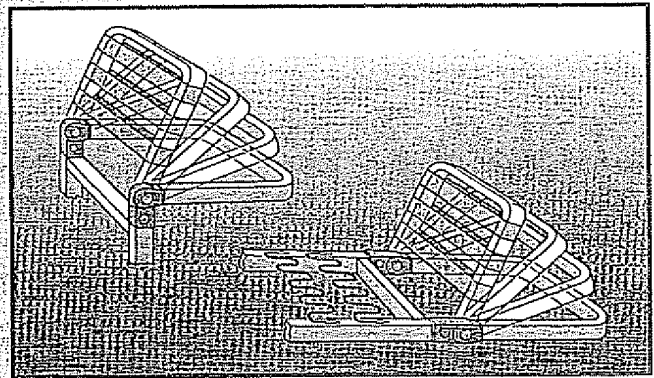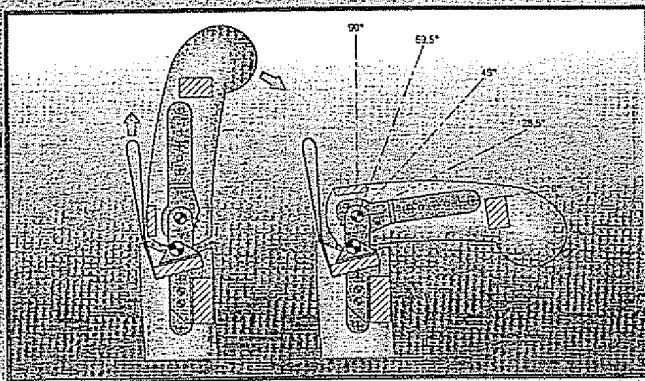

Upholstery joints and accessories for furniture

In all common variations. Proven to be of top
quality over a million times.

For further information we will be pleased
to send you **detailed leaflets** showing
measurements and drill patterns.

Timber frames with mounted fittings can be
supplied on request at cost.

Upholstered prototypes you will find in our
showroom. We would be glad to welcome you.

Polstergelenke

mit **Zahnrastung 22,5°**
für Armlehnen- und
Kopfstützenverstellungen

Mit automatischer Schenkelverlängerung.

Dadurch

keine Faltenbildung

bei Kopfstützen- und Armlehnenverstellungen

für Armlehnen wahlweise mit

⊗ 4 oder 5 Raststufen




für Kopfstützen wahlweise mit

⊗ 5 oder 6 Raststufen

max. 350 N auf 30 cm vom
Drehpunkt p. Stck.

Weitere Informationen
bitte anfordern unter

CA 18

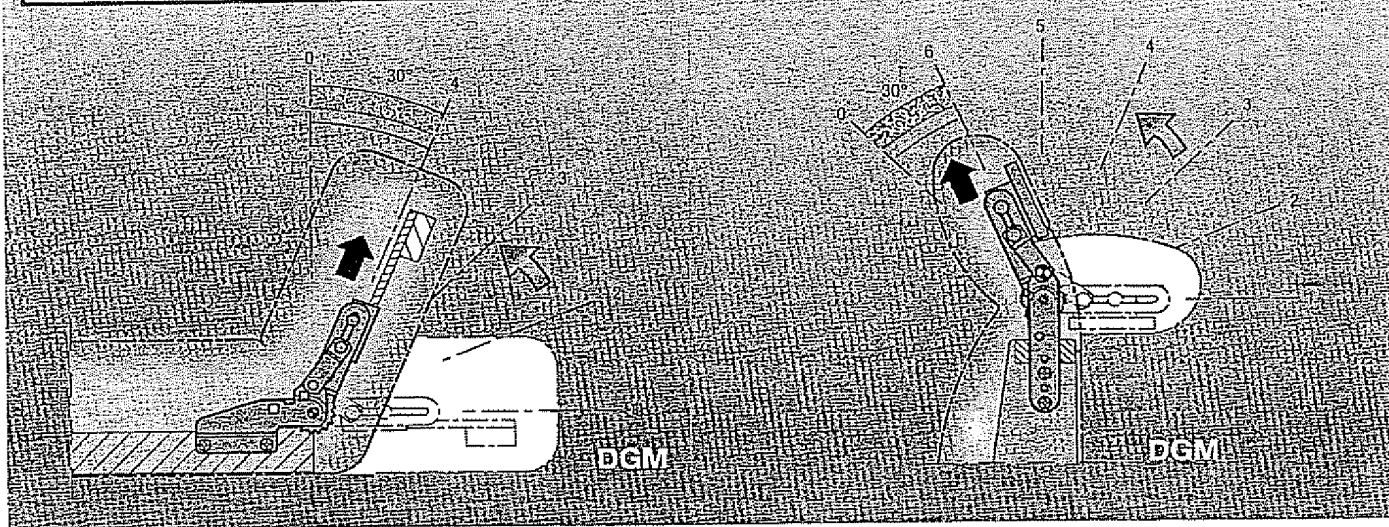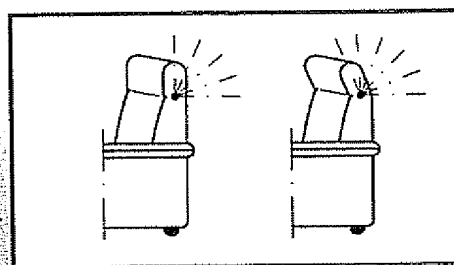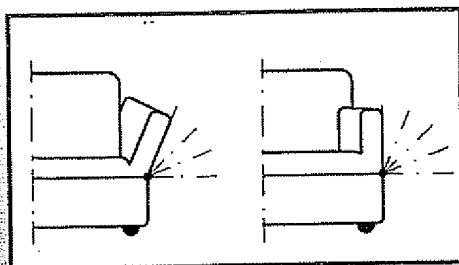

Upholstery Joints

with **tooth catch 22,5°**
for armrest and
headrest adjustments

With integrated lever extension.

Result:

no creases

on headrest and armrest adjustments

for armrests to choose

⊗ 4 or 5 positions

for headrests to choose

⊗ 5 or 6 positions

max. 350 N at 30 cm distance
off swivel point p. pce.

For further information
please request under

CA 18

Polstergelenke



mit **Zahnrastung 22,5°**
für Armlehnenverstellungen

komplett verkapselt
geeignet für die gelenkige Verbindung von
Rechteckrohr 30 x 20 x 1,5 mm oder
Holzzargen

- ⊗ leichtgängige Verstellung
- ⊗ geräuscharm
- ⊗ ohne Abdeckung zu polstern

max. 350 N auf 30 cm vom
Drehpunkt p. Stck.

Weitere Informationen
bitte anfordern unter **CA 47**

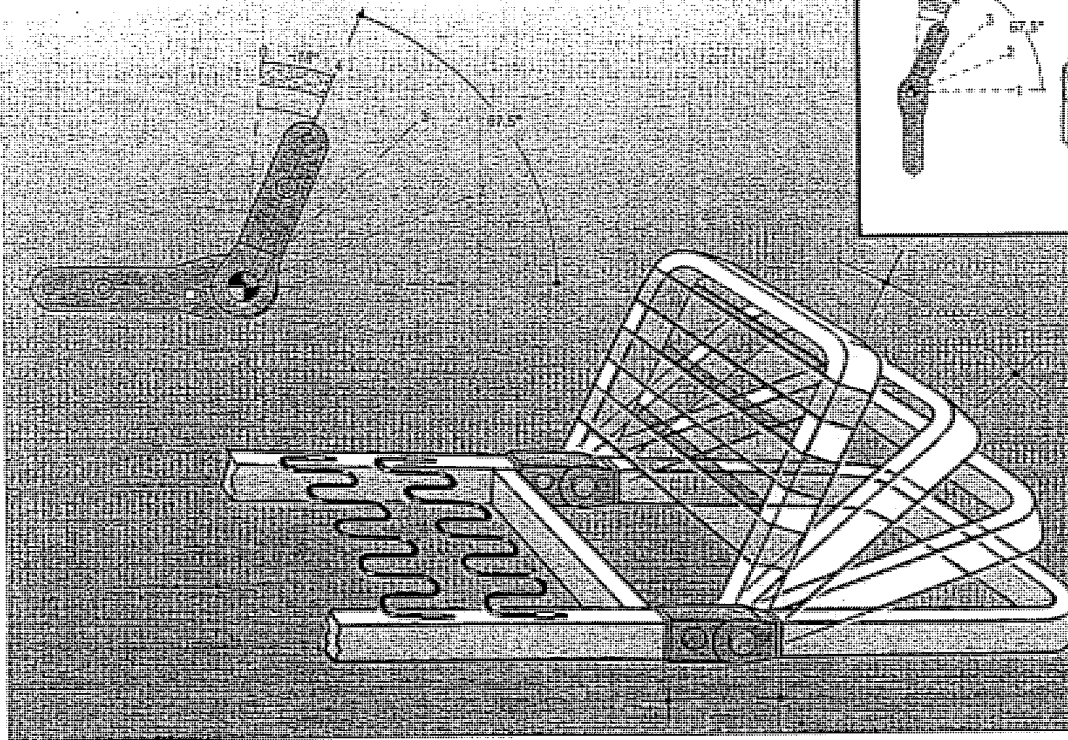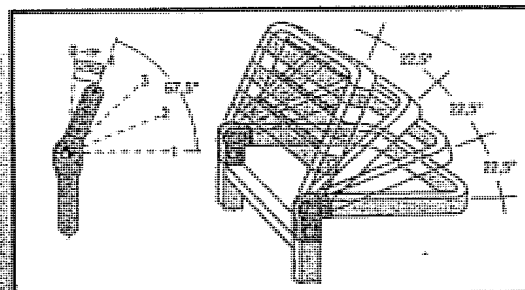

DGM

Upholstery Joints

with **tooth catch 22,5°**
for armrest adjustments

completely encapsulated
suitable for the jointed connection of
rectangular tube 30 x 20 x 1,5 mm or
wooden frames

- ⊗ smooth adjustment
- ⊗ quiet function
- ⊗ to upholster without extra protection

max. 350 N at 30 cm distance
off swivel point p. pce.

For further information
please request under **CA 47**

Polstergelenke


für Armlehnen- und / oder
Kopfstützenverstellungen

mit stufenloser Klemmung

für die gelenkige Verbindung von
Holzzargen oder Stahlrohr 22 Ø x 1,8

- ⊗ für Armlehnen- und
Kopfstützenverstellungen
- ⊗ Klemmstärken und Schenkel
in verschiedenen Ausführungen

Weitere Informationen
bitte anfordern unter **CA 10**

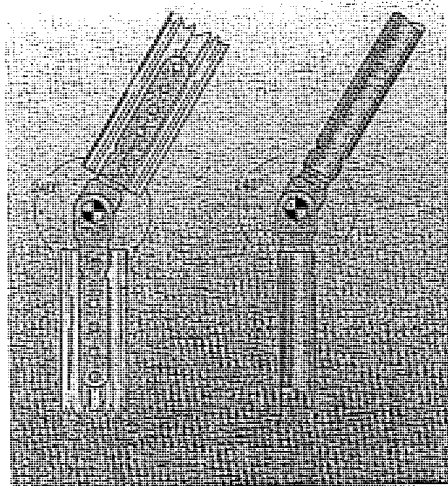

mit Klemmrastung 45°

für normale Belastung


oder

mit Klemmrastung 18°

für besonders hohe Belastung

- ⊗ für Armlehnen- und
Kopfstützenverstellungen
- ⊗ Klemmstärken und Schenkel
in verschiedenen Ausführungen

Weitere Informationen
bitte anfordern unter **CA 12**

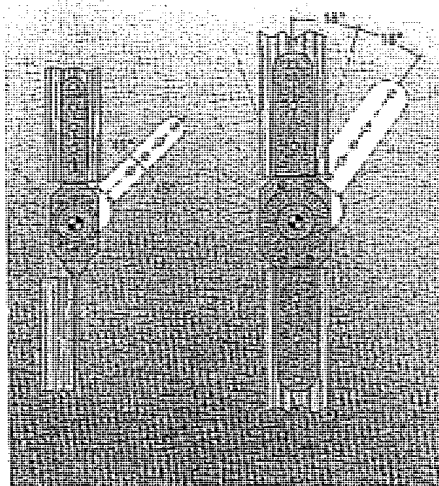


mit Zahnrastung 22,5°

leichte Ausführung

für geringe Belastung

- ⊗ für Kopfstützenverstellungen
- ⊗ Winkelverstellungen, Rastpositionen
und Schenkel in verschiedenen
Ausführungen
- ⊗ Schenkel auch mit angenieteten
Winkeln lieferbar

Weitere Informationen
bitte anfordern unter **CA 14**

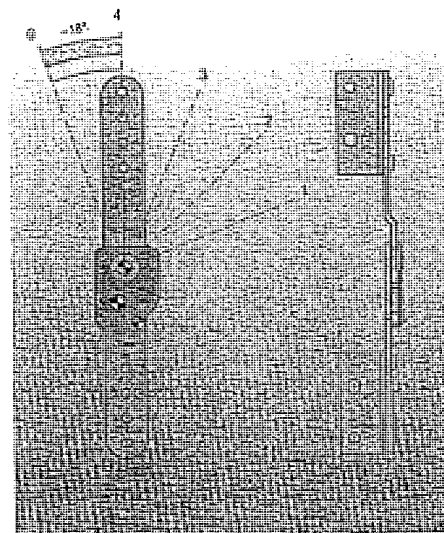

Upholstery Joints

für armrest and / or
headrest adjustments

with infinitely variable friction

für a jointed connection of
wooden frames or steel tubes 22 Ø x 1,8

- ⊗ for armrest and headrest
adjustments
- ⊗ frictions and levers
in different types

For further information
please request under **CA 10**

with friction catch 45°

für normal strain

or

with friction catch 18°

für special high strain

- ⊗ for armrest and headrest
adjustments
- ⊗ frictions and levers
in different types

For further information
please request under **CA 12**

with tooth catch 22,5°

light weight version

für low strain

- ⊗ for headrest adjustments
- ⊗ adjustments of both levers, their
positions and levers in different types
- ⊗ versions with extra brackets riveted on
are also available

For further information
please request under **CA 14**

Polstergelenke


mit **Zahnrastung 22,5°**
für Armlehnen- und/oder
Kopfstützenverstellungen

schwere Ausführung

für höhere Belastung;
z.B. für Armlehnenverstellung
(max. 350 N auf 30 cm vom Drehpunkt p. Stck.)

- ☉ Winkelverstellung der Schenkel und Anzahl der Rastungen in verschiedenen Ausführungen
- ☉ Schenkel auch mit angenieteten Winkeln lieferbar


Weitere Informationen
bitte anfordern unter **CA 17**

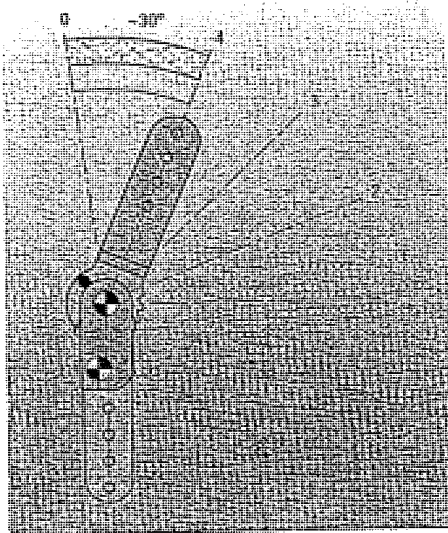

verbunden mit
Stahldrahtbügel
für Kopfstützenverstellungen

- ☉ in vielen Varianten und Breiten lieferbar


Weitere Informationen
bitte anfordern unter **CA 20**

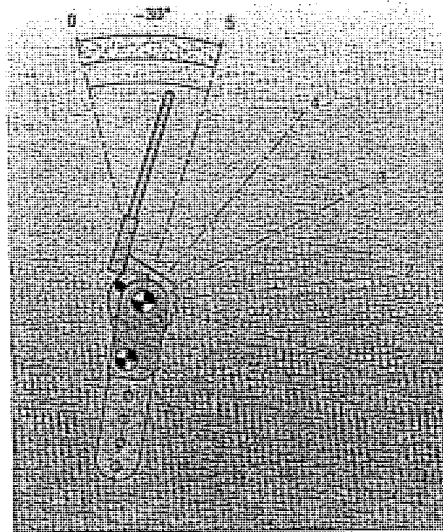

Sonderanfertigungen

Bitte teilen Sie uns Ihre Wünsche mit.
Vielleicht fertigen wir Ihre Idee schon in Serie.

Weitere Informationen
bitte anfordern unter **CA 40**

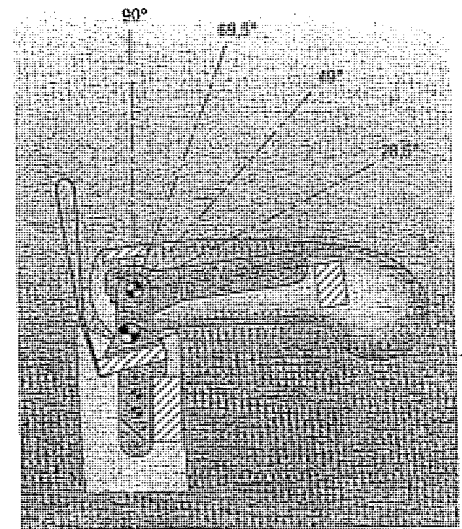

Upholstery Joints

with **tooth catch 22,5°**
for armrest and/or
headrest adjustments

heavy duty version

for high strain;
e.g. for armrest adjustment
(max. 350 N at 30 cm distance off
swivel point p. pce.)

- ☉ the adjustment of both levers and their positions can be supplied in different types
- ☉ versions with extra brackets riveted on are also available

For further information
please request under **CA 17**

connected with
steel wire
for headrest adjustments

- ☉ available in various versions and different widths

For further information
please request under **CA 20**

special fabrications

Please let us know your needs.
Your idea might be in our production already.

For further information
please request under **CA 40**

sonstiges Möbelzubehör

für Polstermöbel

Verbinder für Polster Elemente


Die Rastgabel wird ausgeschwenkt und die Polster Elemente zusammengeschoben. Durch Anheben wird die Verbindung wieder gelöst.

wahlweise mit

- ⊗ Plattenbefestigung
- ⊗ Winkelbefestigung

Weitere Informationen
bitte anfordern unter

DA 13

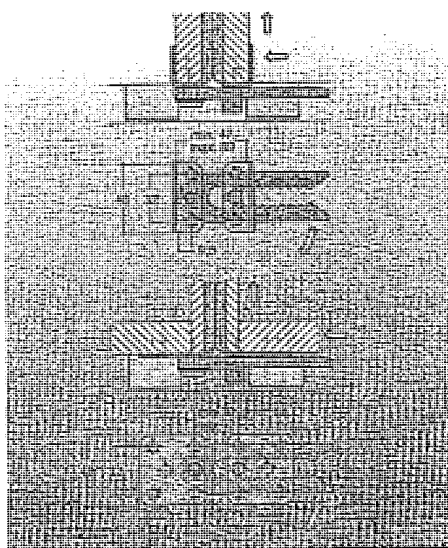

Höhenverstellung für Kopf- und Armteile

Verchromtes Ovalrohr mit eingebauter Verstelltechnik.


- ⊗ stufenlose Ausführung, $H_{\max} = 170 \text{ mm}$
- ⊗ Zahnrastung 6-fach, $H_{\max} = 120 \text{ mm}$

wahlweise mit

- ⊗ festem Kopfteil
- ⊗ schwenkbarem Kopfteil

Weitere Informationen
bitte anfordern unter

DA 15

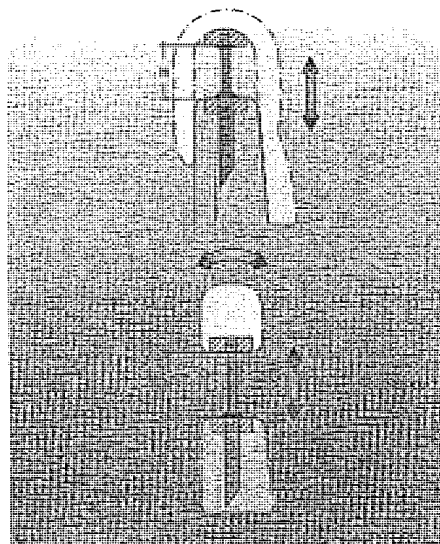


Möbelrollen

Auszug aus unserem Lieferprogramm

- ⊗ alle gängigen Varianten passend zu unseren Sofabett ausführungen

Weitere Informationen
bitte anfordern unter

KU 05

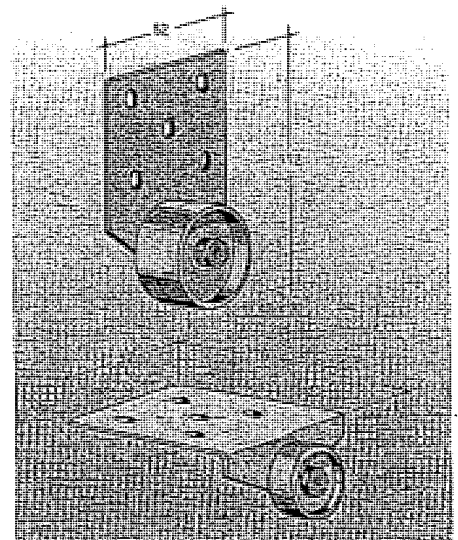

Accessories

für upholstered furniture

connectors for upholstered units

The catch fork is turned and the upholstered pieces are pushed together. The connection is released by lifting.

please choose

- ⊗ fastening with flat plate
- ⊗ fastening with angle bracket

For further information
please request under

DA 13

height adjustment for head- and armrests

Chrome plated oval tube incorporating adjustment technique.

- ⊗ infinitely variable, $H_{\max} = 170 \text{ mm}$
- ⊗ tooth catch (6 pos.), $H_{\max} = 120 \text{ mm}$

please choose

- ⊗ fixed headrest
- ⊗ rotational headrest

For further information
please request under

DA 15

furniture castors

extract of our manufacturing range

- ⊗ all common variations matching our ranges of sofas

For further information
please request under

KU 05

sonstiges Möbelzubehör

für Polstermöbel

Metallrahmen für Sofabetten


inklusive

Wellenfedern

kunststoffgelagert, d.h. geräuschfrei
Abstand der Federn variabel
(Norm ca. 90 mm)

- ⊗ Stahlrohr 20 x 30 mm hochkant, pulverbeschichtet
- ⊗ hohe Tragfähigkeit bei geringer Bauhöhe
- ⊗ inkl. Bohrungen für verschiedene Funktionsbeschläge
- ⊗ dauerhafte Maßgenauigkeit

Weitere Informationen
bitte anfordern unter **DM 18**

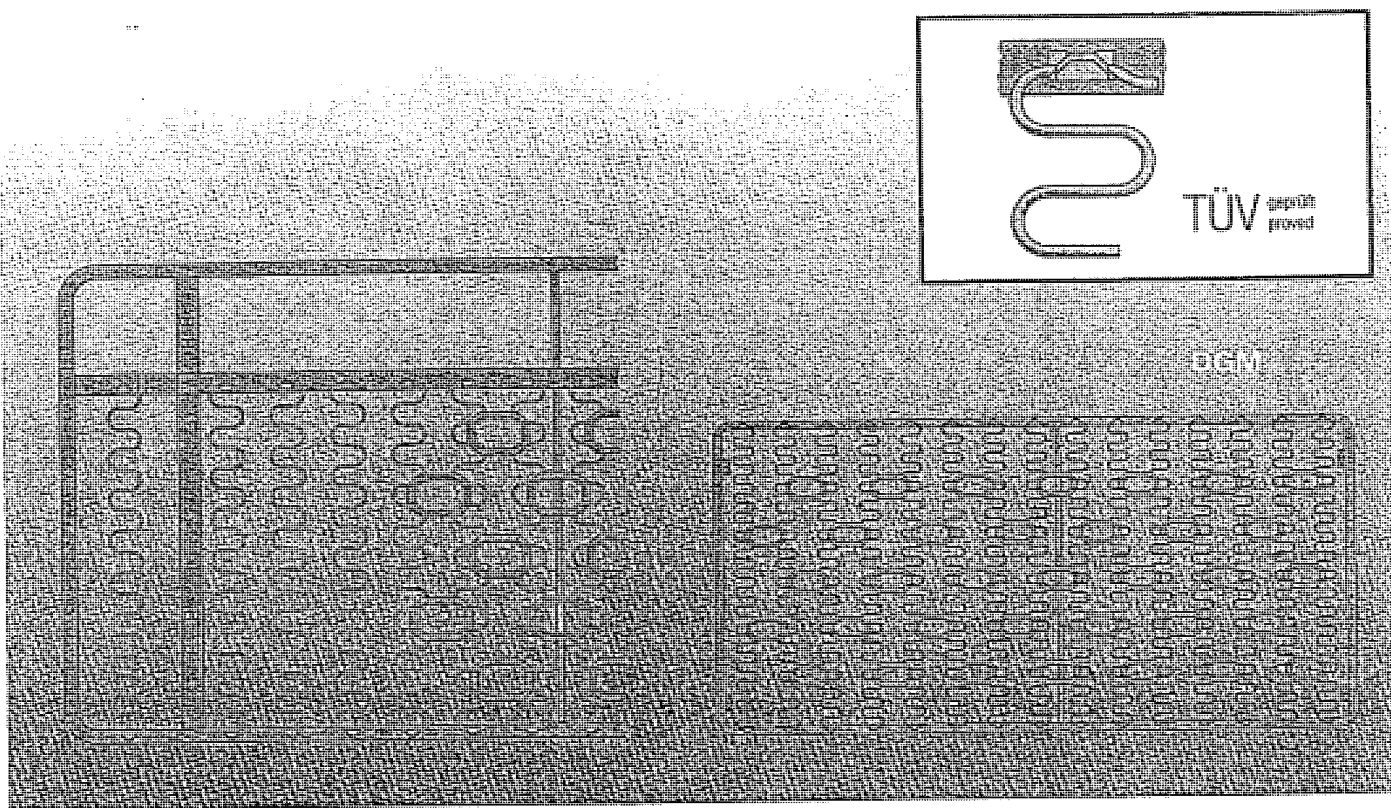

Accessories

für upholstered furniture

metal frames for sofas

inclusive

sinuous springs

attached with plastic noise-free mountings
variable spacing of the springs
(stand. approx. 90 mm)

- ⊗ steel tube 20 x 30 mm cross section, powder-coated
- ⊗ high strength from low profile sections
- ⊗ incl. pre-drilled holes for various function fittings
- ⊗ consistently accurate dimensions

For further information
please request under **DM 18**

sonstiges Möbelzubehör

für Polstermöbel

Metallrahmen für Ruhesessel

inklusive

Wellenfedern

kunststoffgelagert, d.h. geräuschfrei
Abstand der Federn variabel
(Norm ca. 90 mm)


- ⊗ Stahlrohr 20 x 30 mm, pulverbeschichtet
- ⊗ hohe Tragfähigkeit bei geringer Bauhöhe
- ⊗ inkl. Bohrungen für verschiedene Funktionsbeschläge
- ⊗ dauerhafte Maßgenauigkeit

auf Wunsch mit

- ⊗ manueller Kopfteilverstellung
- ⊗ automatischer Kopfteilverstellung

Weitere Informationen
bitte anfordern unter

DM 18

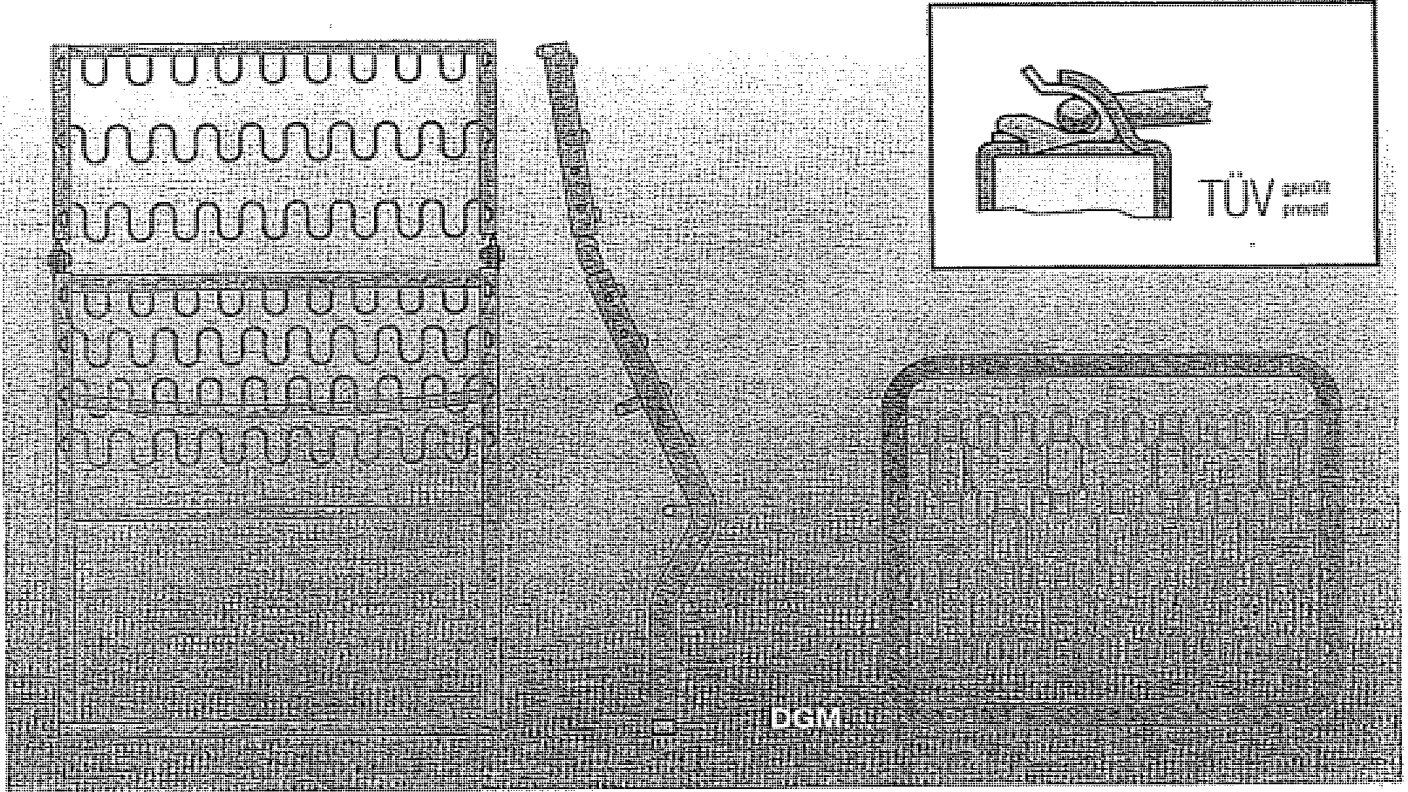

Accessories

für upholstered furniture

metal frames for relaxing chairs

inclusive

sinuous springs

attached with plastic noise-free mountings
variable spacing of the springs
(stand. approx. 90 mm)

- ⊗ steel tube 20 x 30 mm, powder-coated
- ⊗ high strength from low profile sections
- ⊗ incl. pre-drilled holes for various function fittings
- ⊗ consistently accurate dimensions

on request with

- ⊗ manual headrest adjustment
- ⊗ automatic headrest adjustment

For further information
please request under

DM 18

Stanzwerk Wetter
Scheischmidt GmbH & Co. KG



FUNKTIONS - BESCHLÄGE

stawett

FUNCTIONAL FITTINGS FERRURES FONCTIONNELLES

Perfektion in der Funktion

2003
2004

Unser Unternehmen

STAWETT – unter diesem Namen kennt man das Stanzwerk Wetter, Sichelschmidt GmbH & Co. KG.

Gegründet wurde unser Unternehmen 1923 in Wetter an der Ruhr. Seit dieser Zeit entwickeln und produzieren wir Stanzteile und Funktionsbeschläge für die Möbelindustrie.

In den vergangenen Jahren haben wir uns zunehmend auf Konzeptlösungen für die Polstermöbel- und Möbelindustrie spezialisiert.

Deshalb messen wir der Marktforschung hohe Bedeutung zu, greifen die Trends des Marktes auf und entwickeln in unserer Konstruktionsabteilung kreative, zukunftsweisende Beschlagstechniken. Darüber hinaus setzen wir spezielle Kundenwünsche in praxisbezogene Lösungen um.

1991 wurde die Firma Stanzwerk Salzwedel GmbH & Co. KG in Sachsen-Anhalt gegründet. Durch diese Kapazitätserweiterung sind wir in der Lage, auch künftigen Marktanforderungen gerecht zu werden.

Qualität ist für uns seit langem selbstverständlich. Um dies nach außen hin zu dokumentieren, leben wir dieses Qualitätsbewußtsein seit 1997 unter DIN ISO 9001.

Jahrzehntelange Erfahrung, intensiver Kundenkontakt und moderne Fertigungsmöglichkeiten in Verbindung mit kreativen, geschützten Beschlagslösungen machen uns auch künftig zu einem leistungsfähigen Partner der Polstermöbel- und Möbelindustrie.

Ob Standardbeschläge oder Spezialkonzepte - fordern Sie uns !

Our company

STAWETT - this is the name that Stanzwerk Wetter, Sichelschmidt GmbH & Co. KG is known as.

Our company was founded in Wetter Ruhr in 1923. Since then we have been developing and producing pressed and punched fittings for the furniture industry, specialising in producing solutions for the manufacture of adjustable furniture.

We place a high importance on market research, picking up on the market trends and developing markets with innovative mechanism technology in our large development department. Furthermore we can convert specialist customer requirements into solutions.

In 1991 the company Stanzwerk Salzwedel GmbH & Co. KG in Saxony Anhalt was founded. This increase in our capacity ensures that market requirements for the future will be met.

Quality is not a privilege, but a right for the customer to us. Our certification of DIN ISO 9001 since 1997 demonstrates our commitment to this.

Decades of experience, continual customer contact and modern facilities combined with creative patented mechanism solutions enable us to be an efficient partner to your furniture business for the future.

Either standard mechanisms or specialised projects - challenge STAWETT !

Notre Entreprise

STAWETT - c'est sous ce nom que l'on connaît la Sté. Stanzwerk Wetter, Sichelschmidt GmbH & Co. KG.

Notre entreprise a été fondée en 1923 à Wetter dans la vallée de la Ruhr. Depuis nous produisons des pièces découpées et des ferrures fonctionnelles pour l'industrie du meuble.

Durant les années passées, nous nous sommes spécialisés de plus en plus sur des solutions conceptuelles pour l'industrie du meuble.

C'est pourquoi nous donnons une grande importance aux analyses du marché et évaluons ses tendances, développons avec créativité des idées innovantes et transformons les souhaits spécifiques de nos clients en solutions tangibles et fonctionnelles.

En 1991 fut fondée la Sté Stanzwerk Salzwedel GmbH & Co. KG en Saxe-Anhalt. Grâce à cet accroissement de capacité, nous sommes en mesure de répondre aux exigences futures imposées par le marché.

Qualité n'est pas un privilège mais un devoir envers nos clients. Notre certification DIN ISO 9001 depuis 1997 témoigne de notre engagement.

Grâce à son expérience acquise durant des décennies, aux contacts intenses entretenus avec sa clientèle et à ses possibilités de fabrication modernes accompagnées de solutions innovantes et protégées, la Sté Stawett restera un partenaire hautement performant au soin de l'industrie du meuble.

Qu'il s'agisse de ferrures standards ou de concepts spéciaux - n'hésitez pas à nous solliciter !

Perfektion in der Funktion

Produktgruppen Product groups Groupes de produits

Polsterliegen, Französische Betten,
Lattenroste


Seite 02-20

*Upholstered beds, Double beds,
Bed frames*

page 02-20

*Lits avec garnissage, Lits doubles,
Cadres de sommiers*

page 02-20

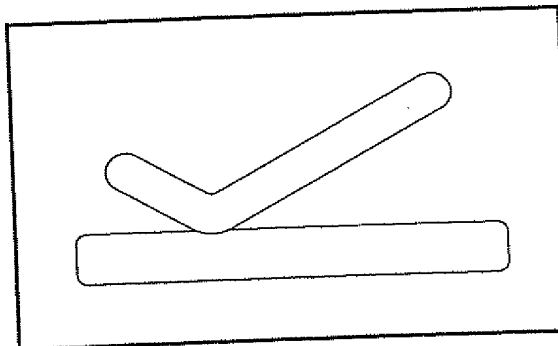

Wandklappbetten


Seite 21-33

Cupboard beds

page 21-33

Armoires-lits

page 21-33

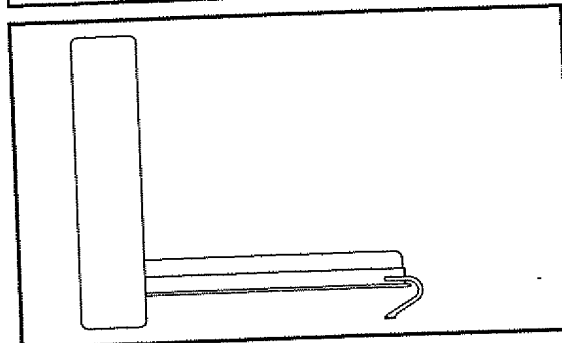

Doppelbettcouches, Ottomanen,
Klappcouches


Seite 34-57

*Double bed-settees, Ottomans,
Bed-settees*

page 34-57

*Canapés-lits, Récamières,
Divans-lits*

page 34-57

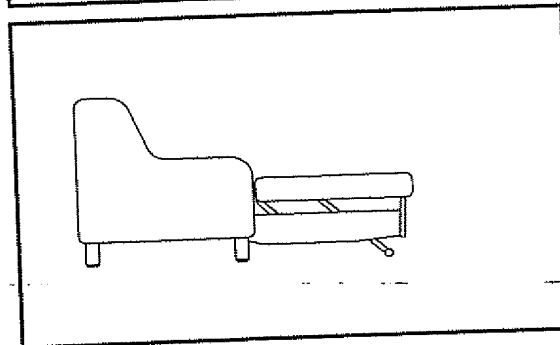

Fernsehsessel


Seite 58-87

Recliner chairs

page 58-87

Fauteuils de relaxation

page 58-87

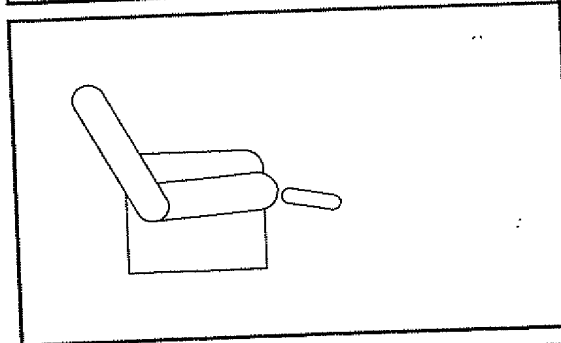

Stanzwerk exklusiv


Seite 88-93

Stanzwerk exclusive

page 88-93

Stanzwerk exclusif

page 88-93

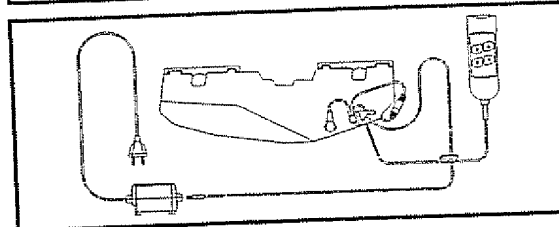

Perfektion in der Funktion

Polsterliegen, Französische Betten, Lattenroste Upholstered beds, Double beds, Bed frames Lits avec garnissage, Lits doubles, Cadres de sommiers

Liftbeschläge Seite 03-05
Bed mechanisms page 03-05
Mécanismes de lit page 03-05

Springaufbeschläge Seite 06-10
Bed mechanisms for storage areas page 06-10
Mécanismes de lits coffre page 06-10

Motorbeschläge für Lattenroste Seite 11-20
Mechanisms for motorised bed frames page 11-20
Mécanismes à moteurs pour cadres de sommiers page 11-20

Bitte beachten Sie


Die meisten Produkte sind **patentrechtlich** geschützt.
Änderungen, die dem technischen **Fortschritt** oder der
Sicherheit dienen, behalten wir uns vor.

Please note


Most of the products are protected by **patent**.
We reserve the right to alterations to the mechanisms in
the interest of **safety** and technical **progress**.

Remarques

La plupart de nos produits sont **brevetés**.
Sous réserve de toutes modifications allant dans le sens
du **progrès technique** et d'une plus grande **sécurité**.

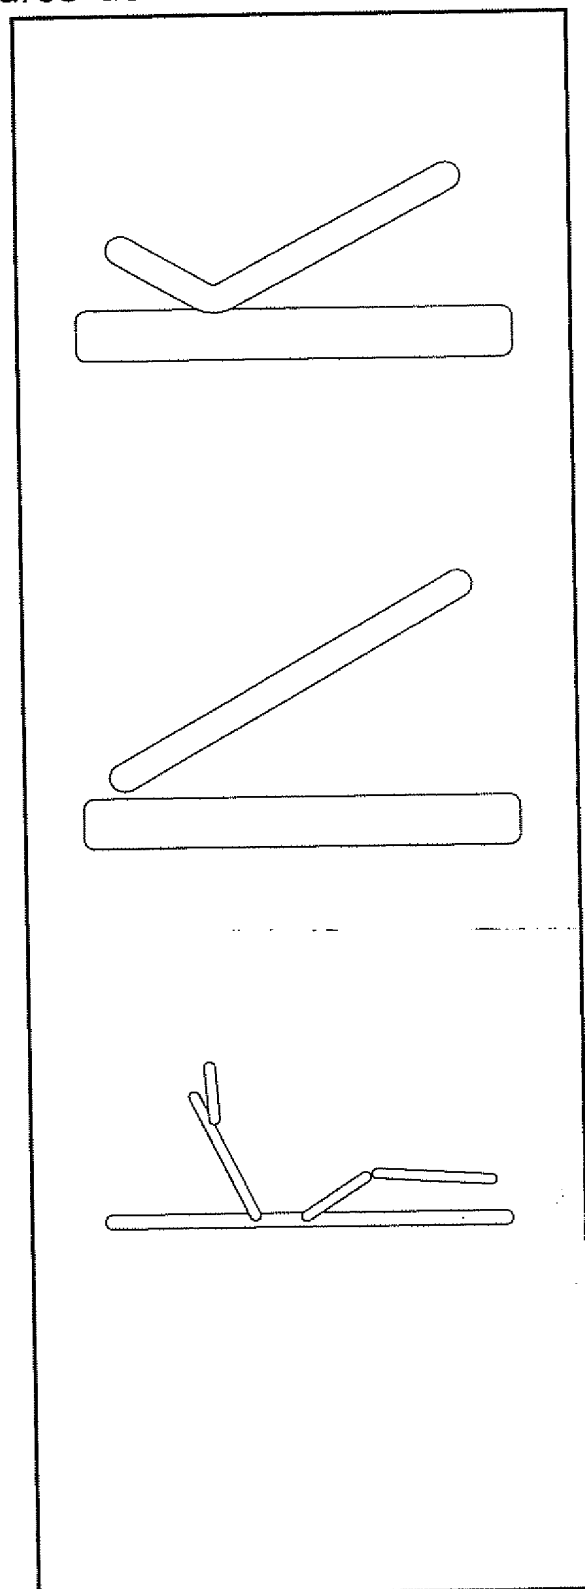

Liftbeschläge Bed mechanisms Mécanismes de lit

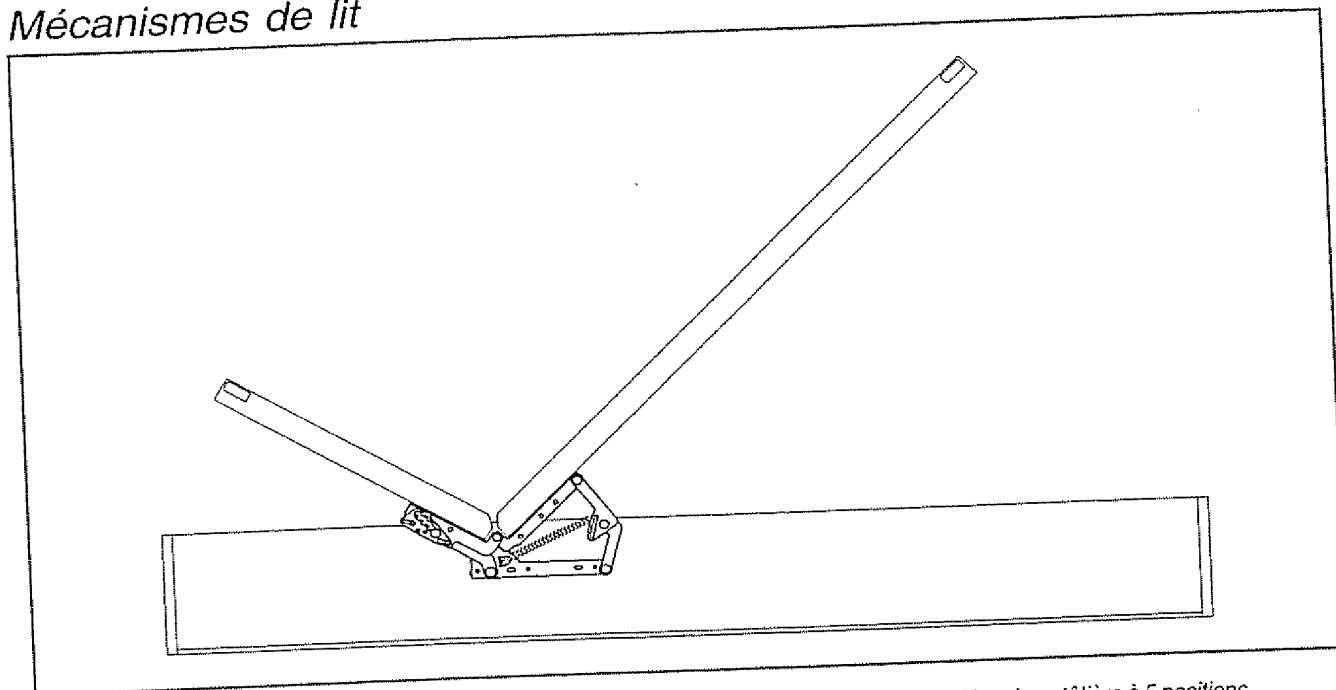

- Kopfteilmechanik mit 5fach Rasterung.
- Leichtere Endmontage durch Steckbeschläge zur Rahmenbefestigung.
- Beschläge mit Gewindetüllen zur leichteren Rahmenpositionierung und kostengünstigeren Montage.
- Patentierte Federeinhängung, Erleichterung der Montage.
- Transport des Bettkastens mit ungespannter Feder möglich.
- Beschlagsoberflächen in verzinkt oder weiß einbrennlackiert.
- Qualitätsüberprüfung durch Dauertests.
- Gasfedern TÜV geprüft.
- Beschlagsbemusterung komplett eingebaut im Kundenmodell möglich.
- CAD-Einbauzeichnungen vorhanden.
- Head mechanism with 5 pos. ratchet.
- Ease of final mounting by use of connectors.
- Mechanisms with threaded nozzles for easier assembly of frame and lower production costs.
- Patented power-saving mounting of springs.
- Unstressed springs during transport of bed.
- Surface galvanised or in white lacquered finish.
- Quality assured by continuous testing.
- Gas springs are tested by the legal security institution TÜV.
- Samples can be delivered mounted in customers' model.
- CAD-mounting drawings are available.
- Mécanique tête à 5 positions.
- Montage aisé par utilisation de connecteurs.
- Ferrures avec douilles filetées pour positionnement facile et montage rapide.
- Accrochage breveté des ressorts, se fait sans efforts.
- Possibilité d'acheminer les lits montés avec les ressorts non tendus.
- Surfaces des ferrures zinguées ou laquées au four-blanc.
- Contrôle qualité par tests permanents.
- Vérins à gaz certifiés TÜV.
- Possibilité de monter des échantillons dans les modèles de nos clients.
- Plans de montage CAD disponibles.



Neuheiten seit der interzum 2001.
New developments since interzum 2001.
Nouveautés depuis interzum 2001.


Gew.
ca. kg

Beschlagsgewicht ohne Zug- oder Gasfeder.
Weight of mech. without tension or gas spring.
Poids de la ferrure sans ressort ou vérin à gaz.

Liftbeschl ge Bed mechanisms M canismes de lit

19730

Gew.
2,4 kg

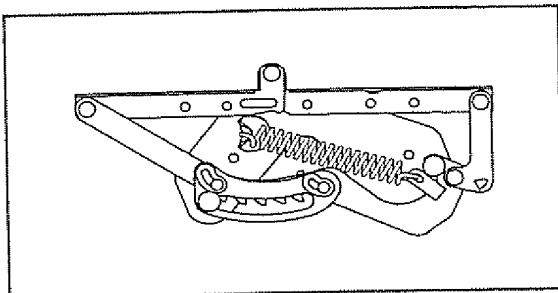


Rastmechanik im Kopfteil, Fu mechanik f r eine Zugfeder F_n 640N oder 1100N.

Head mechanism with click-stop, foot mechanism for one tension spring F_n 640N or 1100N.

Ferrure t ti re crant e, ferrure pieds pour un ressort-traction de F_n 640N ou 1100N.

19734

Gew.
2,4 kg

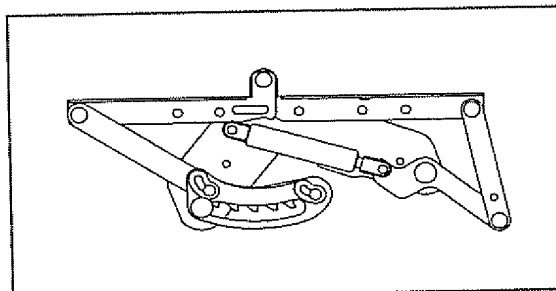


Rastmechanik im Kopfteil, Fu mechanik f r eine Gasfeder F_n 450N-1000N.

Head mechanism with click-stop, foot mechanism for one gas spring F_n 450N-1000N.

Ferrure t ti re crant e, ferrure pieds pour un v rin   gaz de F_n 450N-1000N.

19750

Gew.
2,7 kg

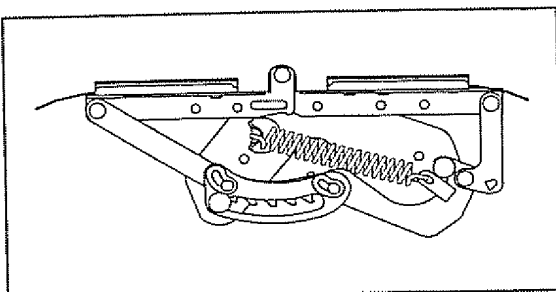


Rastmechanik im Kopfteil, Fu mechanik f r eine Zugfeder F_n 640N oder 1100N. - mit Steckbeschl. -

Head mechanism with click-stop, foot mechanism for one tension spring F_n 640N or 1100N. - with connectors -

Ferrure t ti re crant e, ferrure pieds pour un ressort-traction de F_n 640N ou 1100N. - avec connecteurs de montage -

19754

Gew.
2,7 kg

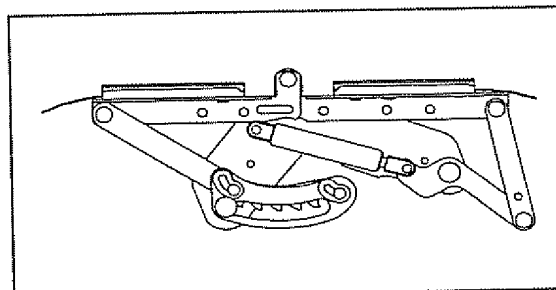


Rastmechanik im Kopfteil, Fu mechanik f r eine Gasfeder F_n 450N-1000N. - mit Steckbeschl. -

Head mechanism with click-stop, foot mechanism for one gas spring F_n 450N-1000N. - with connectors -

Ferrure t ti re crant e, ferrure pieds pour un v rin   gaz de F_n 450N-1000N. - avec connecteurs de montage -

19810

Gew.
2,4 kg

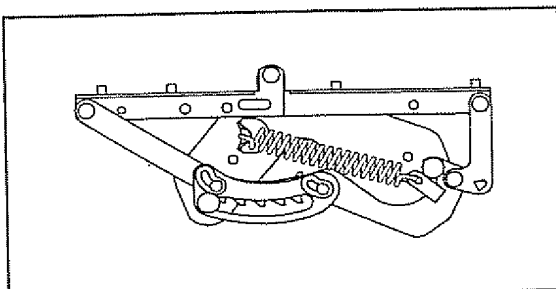


Rastmechanik im Kopfteil, Fu mechanik f r eine Zugfeder F_n 640N o. 1100N. - mit Gewindet llen -

Head mechanism with click-stop, foot mechanism for one tension spring F_n 640N or 1100N. - with threaded nozzles -

Ferrure t ti re crant e, ferrure pieds pour un ressort-traction de F_n 640N ou 1100N. - avec douilles filet es -

19814

Gew.
2,4 kg

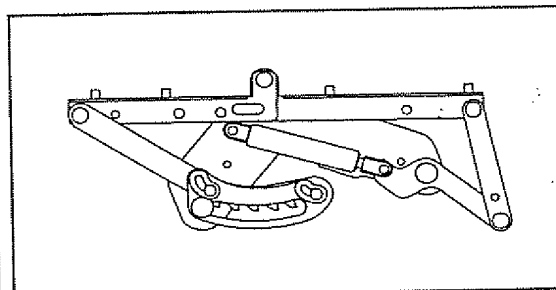

Rastmechanik im Kopfteil, Fu mechanik f r eine Gasfeder F_n 450N-1000N. - mit Gewindet llen -


Head mechanism with click-stop, foot mechanism for one gas spring F_n 450N-1000N. - with threaded nozzles -

Ferrure t ti re crant e, ferrure pieds pour un v rin   gaz de F_n 450N-1000N. - avec douilles filet es -

Liftbeschläge Bed mechanisms Mécanismes de lit

18810

Gew.
2,3 kg

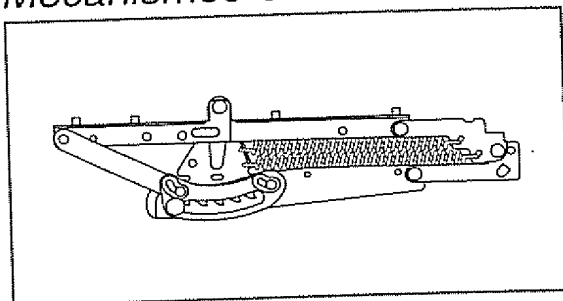


Rastmechanik im Kopfteil, Fußmechanik für eine, oder zwei Zugfedern F_n 680N oder 700N.
- mit Gewindetüllen -

Head mechanism with **click-stop**, foot mechanism for one or two tension springs F_n 680N or 700N. - w. threaded nozzles -

Ferrure tête crantée, ferrure pieds pour un ou deux ressorts-traction de F_n 680N ou 700N. - avec douilles filetés -

18814

Gew.
2,3 kg

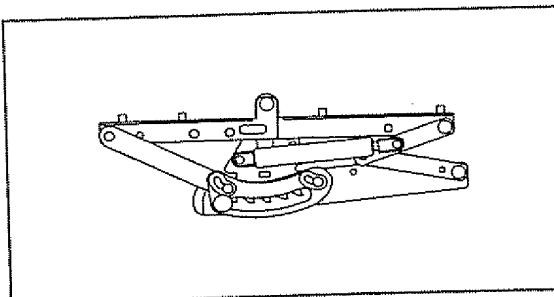


Rastmechanik im Kopfteil, Fußmechanik für eine Gasfeder F_n 450N-1000N. - mit Gewindetüllen -

Head mechanism with **click-stop**, foot mechanism for one gas spring F_n 450N-1000N. - with threaded nozzles -

Ferrure tête crantée, ferrure pieds pour un vérin à gaz de F_n 450N-1000N. - avec douilles filetés -

18741

Gew.
2,6 kg

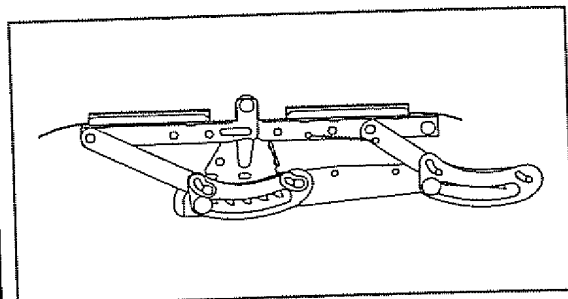


Rastmechanik im Kopf- und Fußteil.
- mit Steckbeschlägen -

Head and foot mechanism with **click-stop**.
- with connectors -

Ferrure crantée côté tête et pieds.
- avec connecteurs de montage -

18931

Gew.
1,6 kg

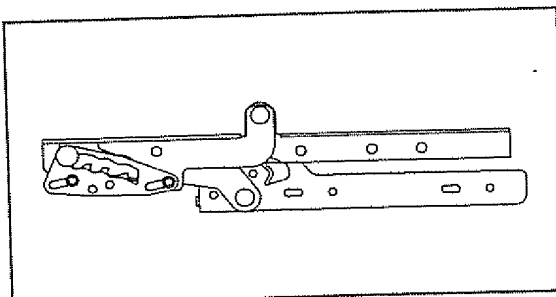


Rastmechanik nur für Kopfteilverstellung.

Click-stop for adjustable head section only.

Ferrure crantée pour relevage de la tête. -

18930

Gew.
2,0 kg

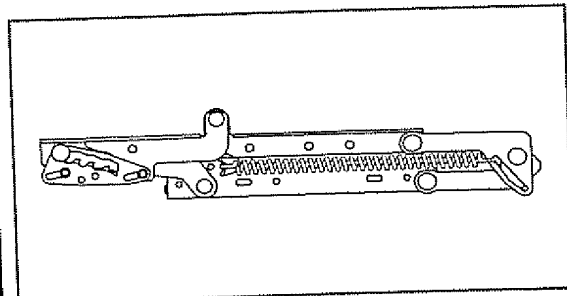


Rastmechanik im Kopfteil, Fußmechanik für eine Zugfeder F_n 640N oder 1120N.

Head mechanism with **click-stop**, foot mechanism for one tension spring F_n 640N or 1120N.

Ferrure tête crantée, ferrure pieds pour un ressort-traction de F_n 640N ou 1120N.

18934

Gew.
1,8 kg

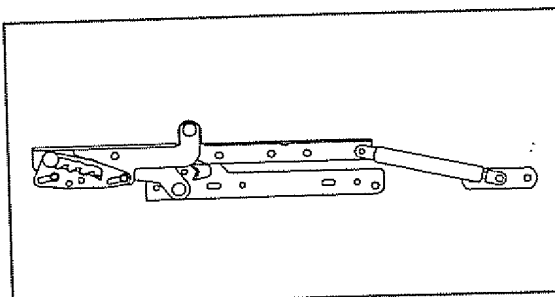


Rastmechanik im Kopfteil, Fußmechanik für eine Gasfeder F_n 500N-800N.

Head mechanism with **click-stop**, foot mechanism for one gas spring F_n 500N-800N.

Ferrure tête crantée, ferrure pieds pour un vérin à gaz de F_n 500N-800N.

Springaufbeschläge Bed mechanisms for storage areas Mécanismes de lits coffre

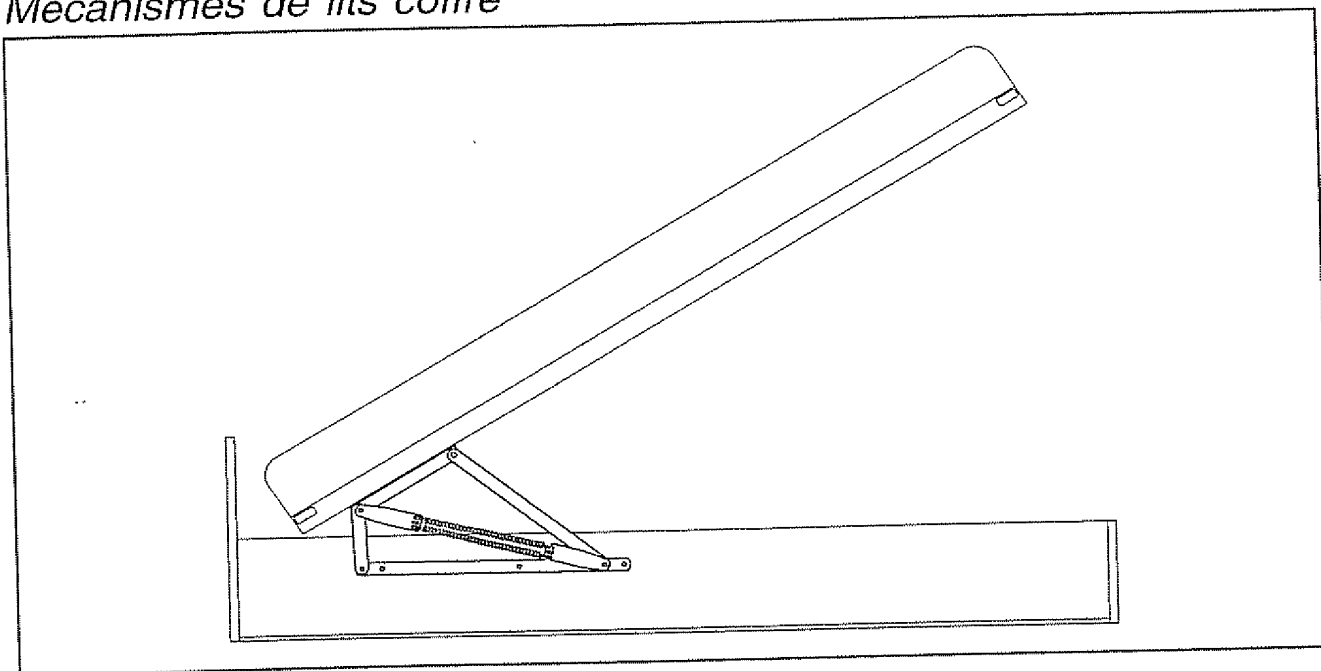

- Beschläge für Polsterbetten, Rahmen, Bettkästen, Möbelkästen etc.
- Beschläge für Längs- und Querbetten mit verschiedenen Öffnungswinkeln.
- Beschläge für unterschiedliche Abmessungen und Gewichtsbelastungen.
- Spezielle Beschläge für weit öffnende Ottomanen mit hohem Rücken.
- Leichtere Endmontage durch Steckbeschläge zur Rahmenbefestigung.
- Beschlagsoberflächen in verzinkt oder einbrennlackiert.
- Qualitätsüberprüfung durch Dauertests.
- Gasfedern TÜV geprüft.
- Beschlagsbemusterung komplett eingebaut im Kundenmodell möglich.
- CAD-Einbauzeichnungen vorhanden.
- Mechanisms for upholstered beds, storage or furniture boxes, frames, etc.
- Mechanisms for transversal and lengthways beds with different opening angles.
- Mechanisms for different sizes and loads.
- Mechanisms for wall-away beds with high back sections as ottomans.
- Easier final mounting by use of connectors.
- Surface galvanised or in lacquered finish.
- Quality assured by continuous testing.
- Gas springs are tested by the legal security institution TÜV.
- Samples can be delivered mounted in customers' models.
- CAD-mounting drawings are available.
- Ferrures pour lits capitonnés, caisses de lits, lits coffre etc.
- Ferrures pour ouverture longitudinale, latérale, avec divers angles d'ouverture.
- Ferrures pour différentes tailles et charges.
- Ferrures spéciales pour récamères à grande ouverture et à dossier haut.
- Montage aisé par utilisation de connecteurs.
- Surfaces des ferrures zinguées ou laquées au four.
- Contrôle qualité par tests permanents.
- Vérins à gaz certifiés TÜV.
- Possibilité de monter des échantillons dans les modèles de nos clients.
- Plans de montage CAD disponibles.




Neuheiten seit der interzum 2001.
New developments since interzum 2001.
Nouveautés depuis interzum 2001.

Gew.
ca. kg

Beschlagsgewicht ohne Zug- oder Gasfeder.
Weight of mech. without tension or gas spring.
Poids de la ferrure sans ressort ou vérin à gaz.

Springaufbeschläge Bed mechanisms for storage areas Mécanismes de lits coffre

12800

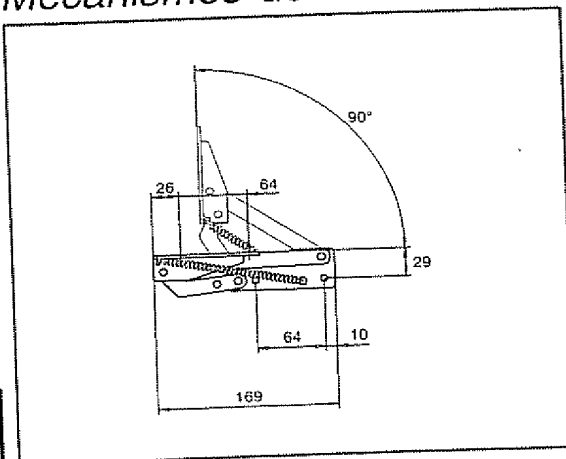

Gew.
0,6 kg


Kleiner Beschlag mit **einer** Zugfeder F_n 280N, kpl. mit **eingehängter** Feder.
Geignet z.B. für Sitzbänke und Hocker.

Small mechanism with **one mounted** tension spring F_n 280N.
Suited e.g. for benches and pouffes.

Petite ferrure avec un ressort-traction de F_n 280N, monté.
Par exemple pour les bancs et poufs.

12850

NEU

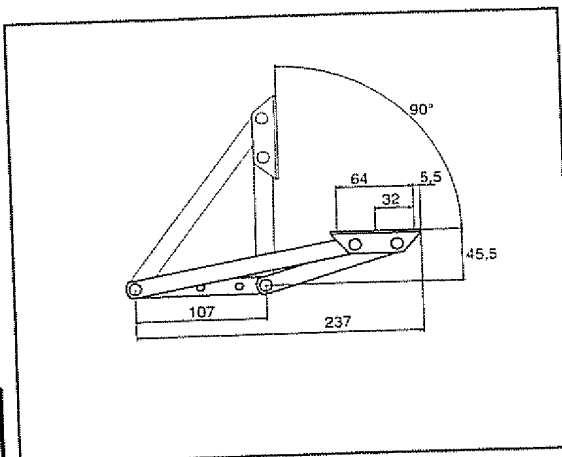

Gew.
0,5 kg


Schwenkbeschlag 90° öffnend.
Geeignet z.B. für Hocker.

Pivot mechanism, opening angle 90°.
Suited e.g. for pouffes.

Ferrure pivotante à 90°.
Par exemple pour poufs.

12860

NEU

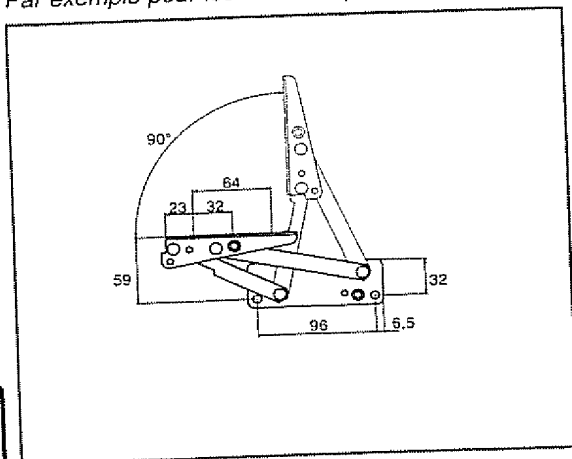


Gew.
0,5 kg

Schwenkbeschlag 90° öffnend.
Geeignet z.B. für Sitzbänke und Hocker.

Pivot mechanism, opening angle 90°.
Suited e.g. for benches and pouffes.

Ferrure pivotante à 90°.
Par exemple pour les bancs et poufs.

11810

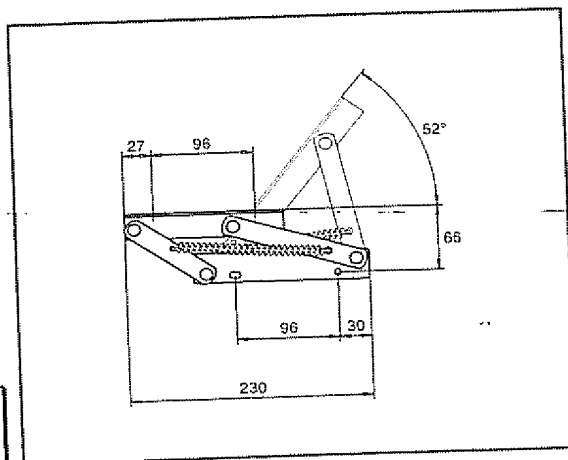

Gew.
0,8 kg


Kleiner Beschlag für **eine** Zugfeder F_n 370N.
Geignet z.B. für Sitzbänke.

Small mechanism for **one** tension spring F_n 370N.
Suited e.g. for benches.

Petite ferrure pour un ressort-traction de F_n 370N.
Par exemple pour les bancs.

Springaufbeschläge Bed mechanisms for storage areas Mécanismes de lits coffre

11815

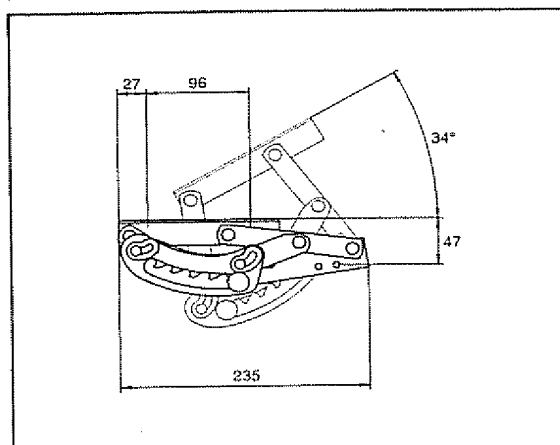


Kleiner Beschlag mit 5fach **Rastmechanik**.
Geeignet z.B. für Hocker oder Kopfteilverstellung.

*Small mechanism with 5-position **click-stop**.
Suited e.g. for pouffes or head sections.*

*Petite ferrure, tête à 5 crans.
Par exemple pour relevage tête ou poufs.*

12310

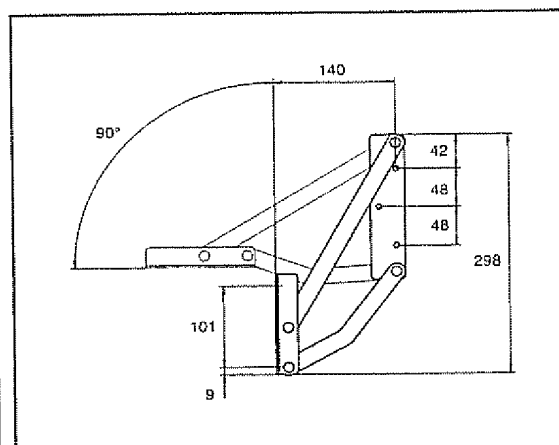


Schwenkbeschlag **90°** öffnend.
Geeignet z.B. für Klapptische in Polstergruppen.

*Pivot mechanism, opening angle **90°**.
Suited e.g. for folding tables in upholstery suites.*

*Ferrure pivotante à **90°**.
Par exemple pour les tablettes de canapé.*

12315

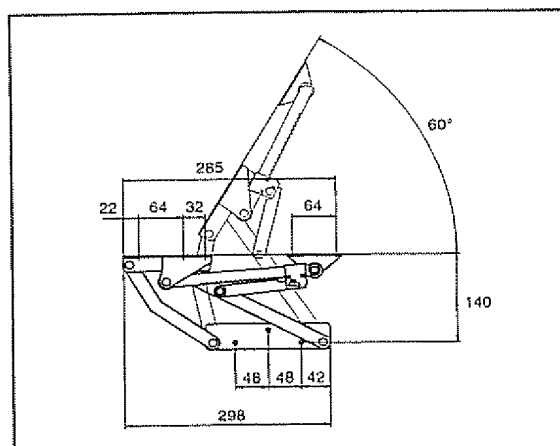


Beschlag mit **Rastmechanik**.
Geeignet z.B. für große Hocker.

*Mechanism with **click-stop**.
Suited e.g. for big pouffes.*

*Ferrure **crantée**.
Par exemple pour les gros poufs.*

11200

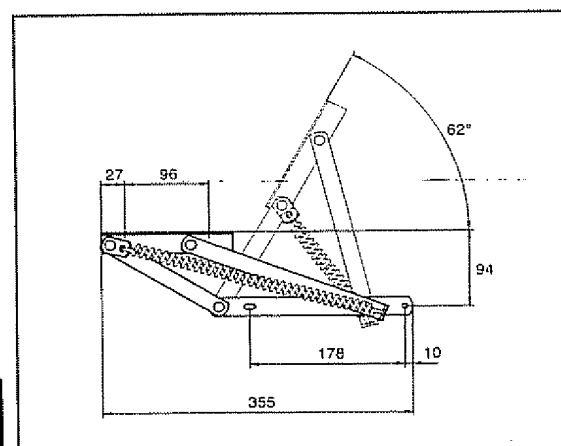

Beschlag für eine Zugfeder **F_n 265-730N**.
Geeignet z.B. für leichte Liegeflächen bis 90cm x 200cm quer öffnend.

*Mechanism for **one** tension spring **F_n 265N-730N**.
Suited e.g. for light loads with sleeping size up to 90cm x 200cm, transverse opening.*


*Ferrure pour **un** ressort-traction de **F_n 265N-730N**.
Par exemple pour couchage léger de 90cm x 200cm, ouverture latérale.*

Springaufbeschläge

Bed mechanisms for storage areas

Mécanismes de lits coffre

11295

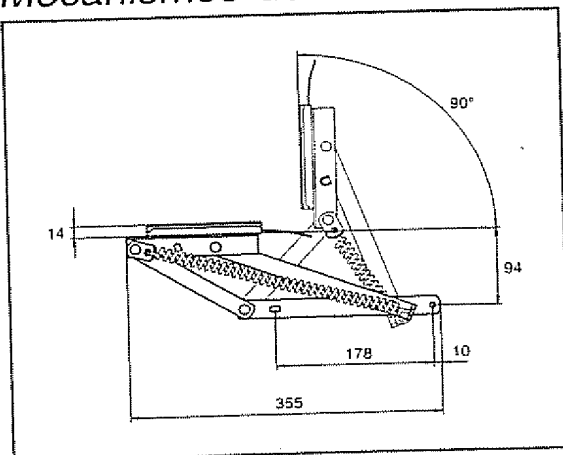


Gew.
1,5 kg

Beschlag, mit Steckbeschlägen, für eine Zugfeder F_n 265N-730N. Geeignet z.B. für leichte Liegeflächen bis 90cm x 200cm quer öffnend.

Mechanism, with connector, for one tension spring F_n 265N-730N. Suited e.g. for light loads with sleeping size up to 90cm x 200cm, transverse opening.

Ferrure, avec connecteurs de montage, pour un ressort-traction de F_n 265N-730N. Par exemple pour couchage léger de 90cm x 200cm, ouverture latérale.

11040

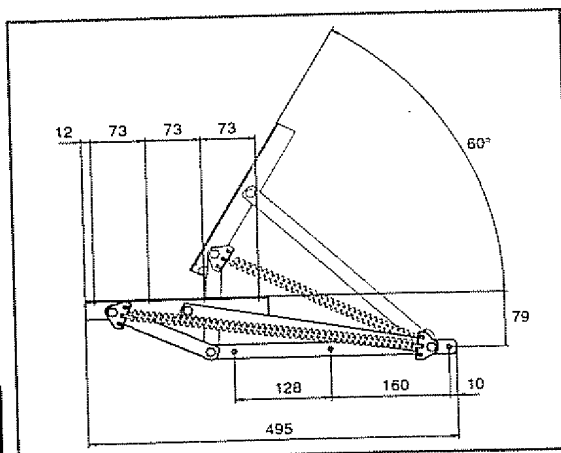


Gew.
1,6 kg

Beschlag für eine oder zwei Zugfedern F_n 400N oder F_n 560N. Geeignet z.B. für Doppelbetten Liegefläche bis 100cm x 200cm quer öffnend.

Mechanism for one or two tension springs F_n 400N or F_n 560N. Suited e.g. for doubles beds, sleeping size up to 100cm x 200cm, transverse opening.

Ferrure pour un ou deux ressorts-traction de F_n 400N ou F_n 560N. Par exemple pour lits doubles avec couchage de 100cm x 200cm, ouverture latérale.

10900

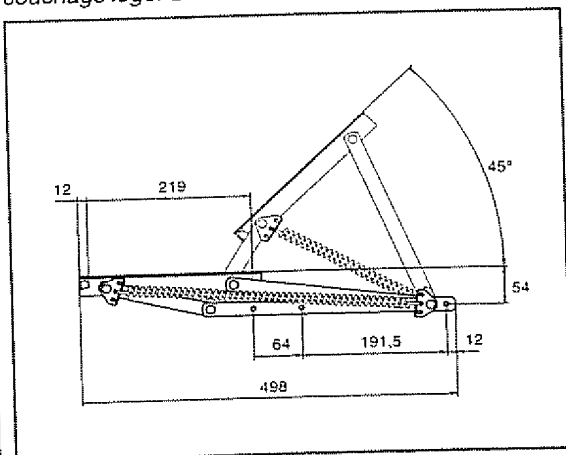


Gew.
1,6 kg

Beschlag für eine oder zwei Zugfedern F_n 400N oder 560N. Geeignet z.B. für Liegeflächen bis 120cm x 200cm quer oder längs öffnend.

Mechanism for one or two tension springs F_n 400N or 560N. Suited e.g. for sleeping size up to 120cm x 200cm, transverse or lengthways opening.

Ferrure pour un ou deux ressorts-traction de F_n 400N ou 560N. Par exemple pour couchage de 120cm x 200cm, ouverture latérale ou longitudinale.

10992

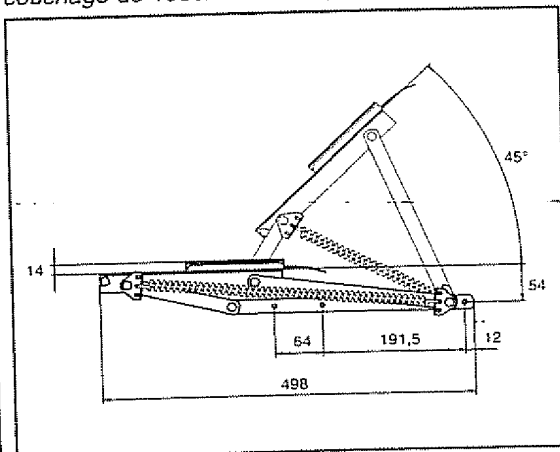

Gew.
1,9 kg


Beschlag wie 10900 jedoch mit Steckbeschlägen.

Mechanism as 10900, but with connector.

Ferrure comme 10900 mais avec connecteurs de montage.

Springaufbeschläge Bed mechanisms for storage areas Mécanismes de lits coffre

10910

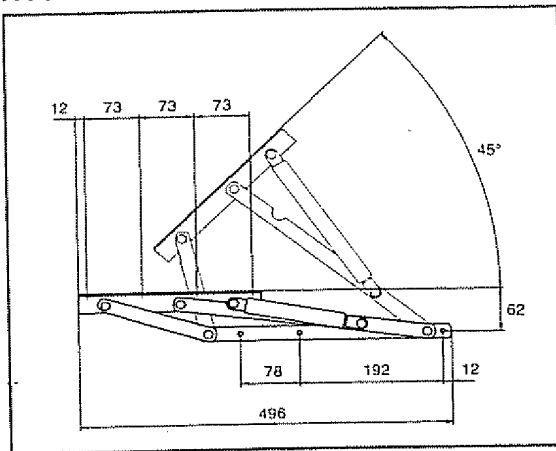


Beschlag für eine Gasfeder **F_n 450N-1200N**.
Geeignet z.B. für Liegeflächen bis 120cm x 200cm
quer oder längs öffnend.

*Mechanism for one gas spring **F_n 450N-1200N**.
Suited e.g. for sleeping size up to 120cm x 200cm,
transverse or lengthways opening.*

*Ferrure pour un vérin à gaz de **F_n 450N-1200N**.
Par exemple pour couchage de 120cm x 200cm,
ouverture latérale ou longitudinale.*

11700

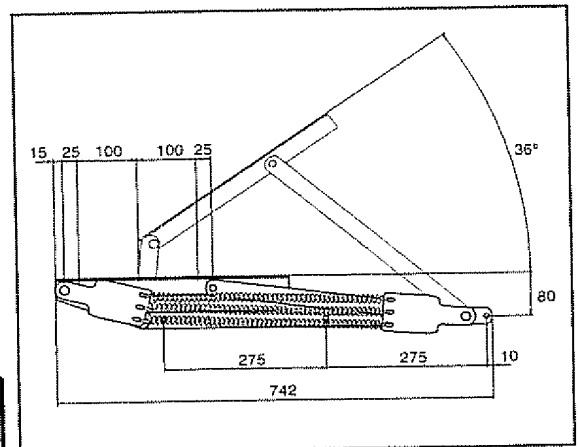


Beschlag für eine, zwei oder drei Zugfedern **F_n 700N**
oder **F_n 900N**. Geeignet z.B. für schwere Liegeflächen
bis 200cm x 200cm quer und längs öffnend.

*Mechanism for one, two or three tension springs
F_n 700N or **F_n 900N**. Suited e.g. for heavy loads with
sleeping size up to 200cm x 200cm, transverse or
lengthways opening.*

*Ferrure pour un, deux ou trois ressorts-traction de
F_n 700N ou **F_n 900N**. Par exemple pour couchage
lourd de 200cm x 200cm, ouverture latérale ou lon-
gitudinale.*

13410

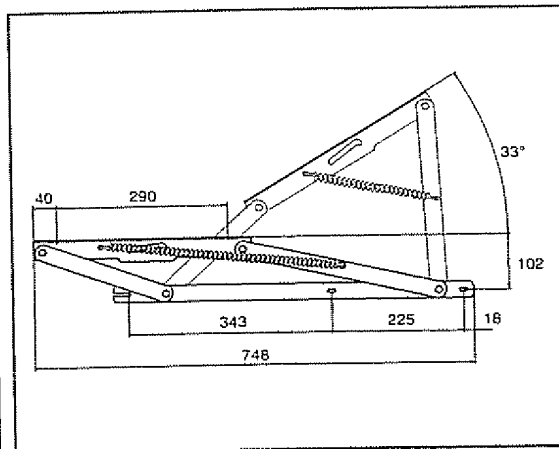


Beschlag für eine Zugfeder **F_n 400N** oder **F_n 560N**.
Geeignet z.B. für schwere Ottomanen.

*Mechanism for one tension spring **F_n 400N** or **F_n 560N**.
Suited e.g. for heavy ottomans.*

*Ferrure pour un ressort-traction de **F_n 400N** ou **560N**.
Par exemple pour récamères lourdes.*

11100

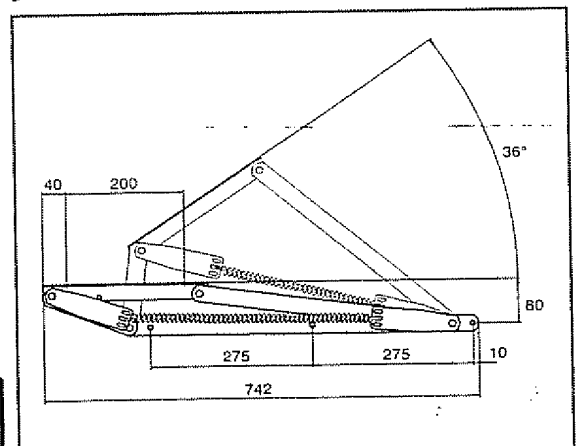

Beschlag für zwei oder vier Zugfedern **F_n 400N-1000N**.
Geeignet z.B. für Liegeflächen bis 160cm x 200cm
quer und längs öffnend.

- Beschlag 11180 wie 11100, aber für Gasfeder -

*Mechanism for two or four tension springs **F_n 400N-1000N**.
Suited e.g. for sleeping size up to 160cm x 200cm,
transverse or lengthways opening.*

- mechanism 11180 as 11100, but for gas springs -


*Ferrure pour deux ou quatre ressorts-traction de
F_n 400N-1000N. Par exemple pour couchage de
160cm x 200cm, ouverture latérale ou longitudinale.*

- 11180 comme 11100, mais pour vérins à gaz -




Motorbeschläge für Lattenroste

Mechanisms for motorised bed frames

Mécanismes à moteurs pour cadres de sommiers

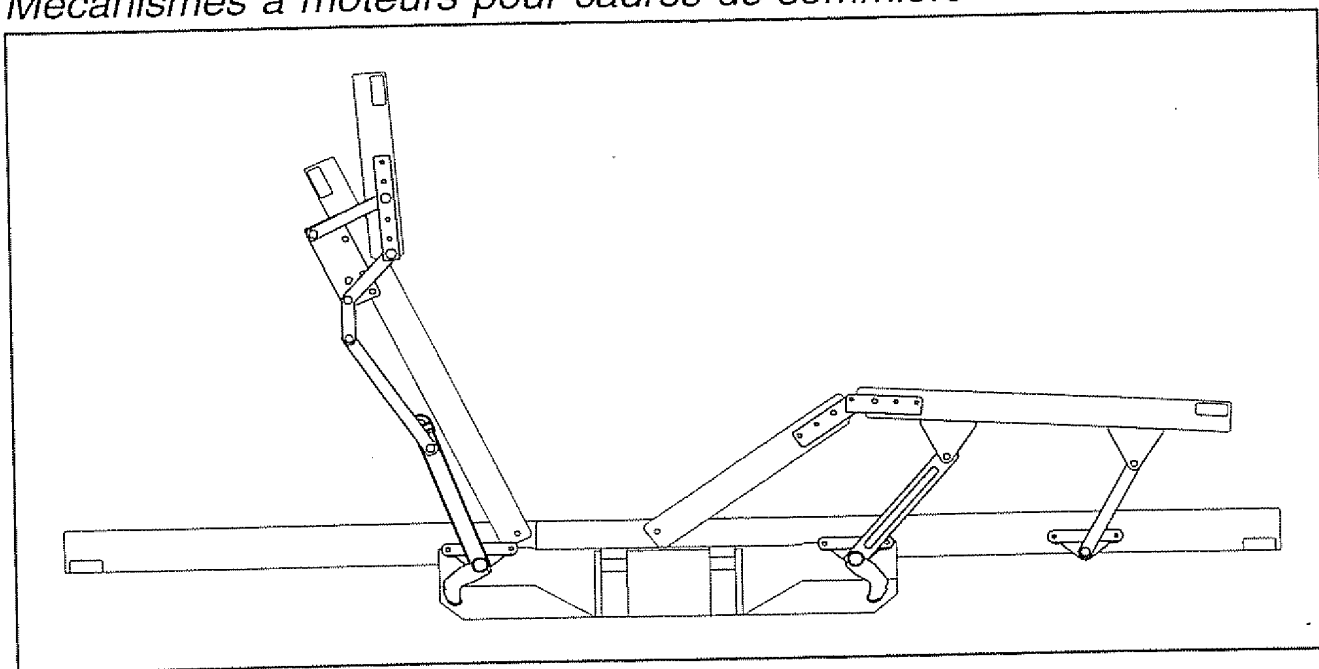

- Alle Kopf- und Fußteilbeschläge auf den Seiten 14-15 miteinander kombinierbar.
- All of head and foot mechanisms on pages 14-15 can be combined.
- Toutes les combinaisons entre les ferrures tête et pieds des pages 14-15 sont possibles.
- Beschläge **optional** mit elektrischem Antrieb, wahlweise mit 110V oder 230V, Netzfreeschaltung und/oder Notabsenkung, lieferbar.
- Mechanisms **optionally** available with motors including mains-free circuit and/or battery back-up for voltages 110V or 230V.
- Les ferrures peuvent être complétées **en option** par des moteurs soit en 110V soit en 230V au choix avec mise-hors-tension et, ou mouvement de secours.
- Beschlagsoberflächen verzinkt, pulverbeschichtet oder einbrennlackiert.
- Surface galvanised or in lacquered finish.
- Surfaces des ferrures zinguées, laquées au four, ou teintées epoxy.
- Bei Bestellungen bitte lichte Rahmeninnenmaß zu den Beschlagsbezeichnungen angeben.
- With order please indicate interior width of frame.
- Pour les commandes, préciser les largeurs intérieures des sommiers avec les références.



- Beschlagsbemusterung komplett eingebaut im Kundenmodell möglich.
- Samples can be delivered mounted in customers' model.
- Possibilité de monter des échantillons dans les modèles de nos clients.
- CAD-Einbauzeichnungen vorhanden.
- CAD-mounting drawings are available.
- Plans de montage CAD disponibles.



Neuheiten seit der interzum 2001.
New developments since interzum 2001.
Nouveautés depuis interzum 2001.


Gew.
ca. kg

Beschlagsgewicht inklusive Kleinteile.
Weight of mechanism including accessories.
Poids de la ferrure, accessoires compris.


Motorbeschläge für Lattenroste Übersicht Kurbelwelle

Mechanisms for motorised bed frames Summary of bended cross bars

Mécanismes à moteurs p. cadres de sommiers Sommaire traverses coudées

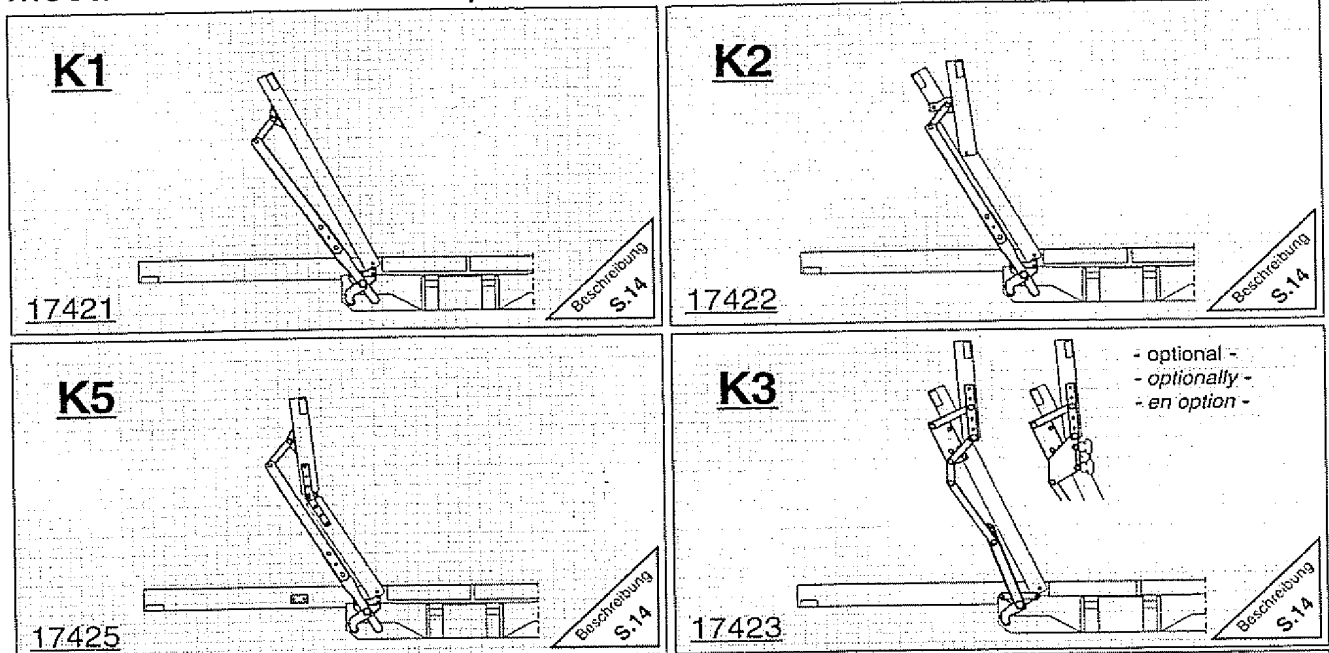


Fuß- und Kopftraverse pro Rahmenbreite gleich.

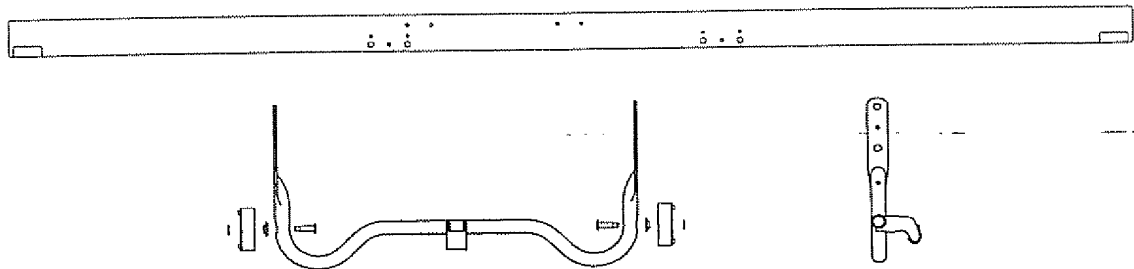

12 Kombinationsmöglichkeiten


- gleiche Anschraubungen in den Seitenrahmen -
- Traversendrehpunkte gebucht und mit steckbaren Lagerbolzen -

Gew.
Anfr.

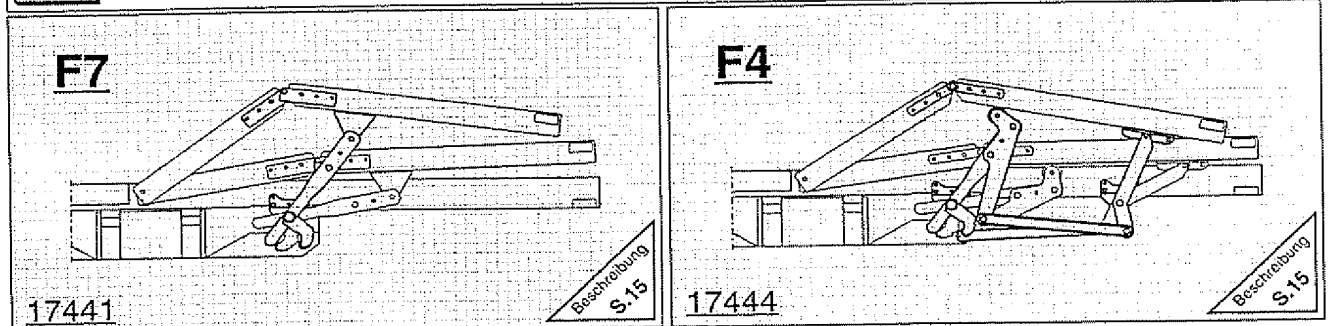

Motorbeschläge für Lattenroste Übersicht Kurbelwelle
Mechanisms for motorised bed frames Summary of bended cross bars
Mécanismes à moteurs p. cadres de sommiers Sommaire traverses coudées

- mit ausschwenkender Pastille für Zusatzlatten -
- with turning pastille for additional slats -
- avec pastille tournante pour lattes supplémentaires -

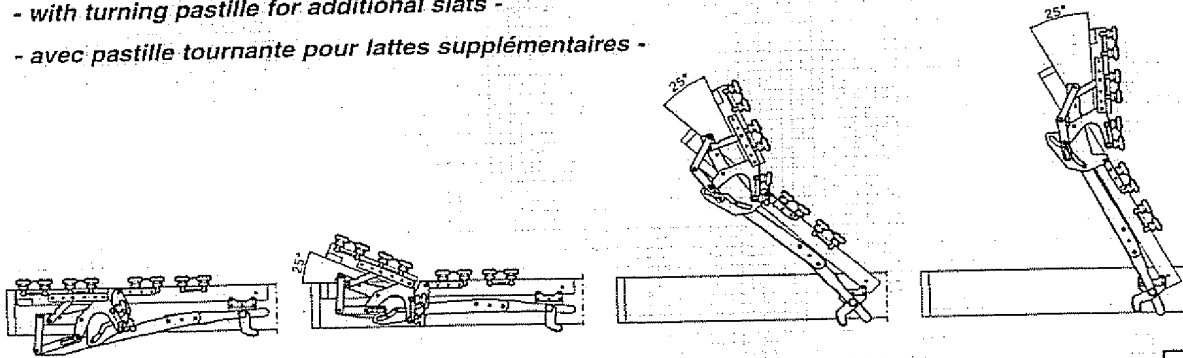


17429

Kopfteilverstellung für schwenkbare innenliegende Nackenstütze mit Längenausgleich für Matratze, zuerst erfolgt das Anheben des Nackenteils und danach das Anheben des Rücken- und Nackenteils bis zur Endposition.

Head mechanism for adjustable internal neck rest with length compensation for mattress. At first movement of neck rest, following movement of back and neck rest up to final position.

Cadre dos et tête oreiller interne à mouvement télescopique. Soutien du matelas sur toute sa longueur. La tête se soulève en premier, suivie du dos avec déploiement télescopique progressif de la tête.

- mit ausschwenkender Pastille für Zusatzlatten -
- with turning pastille for additional slats -
- avec pastille tournante pour lattes supplémentaires -

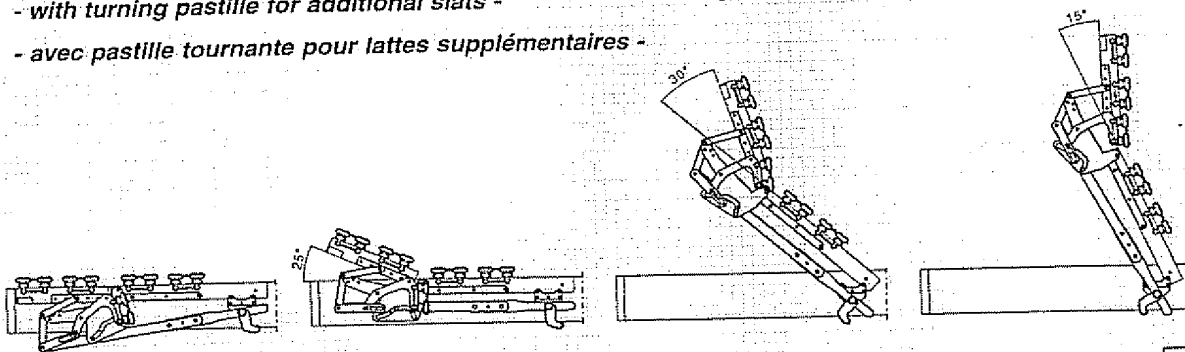

17430

Kopfteilverstellung für separates Rückenteil und über den Beschlag verbundenes Nackenteil mit Längenausgleich für Matratze, zuerst erfolgt das Anheben des Nackenteils und danach das Anheben des Rücken- und Nackenteils bis zur Endposition.


Head mechanism for two-piece back section and neck rest, which is connected with the head mechanism, with length compensation for mattress. At first movement of neck rest, following movement of back and neck rest up to final position.

Comme 17429 mais avec tête oreiller dans le prolongement du cadre dos.

Motorbeschläge für Lattenroste Kopfteilbeschläge
Mechanisms for motorised bed frames Head mechanisms
Mécanismes à moteurs pour cadres de sommiers Relevages tête

K1

Gew.
Anfr.

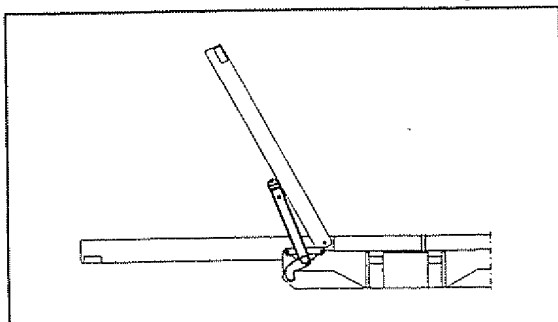


Kopfteilverstellung für durchgehendes Rücken- und Nackenteil.

Head mechanism for one-piece back section without neck break.

Relevage dos / tête en une partie.

K5

Gew.
Anfr.

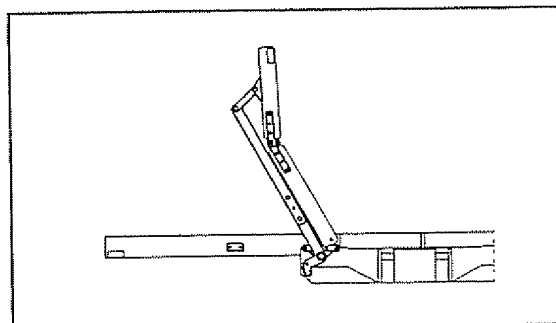


Kopfteilverstellung für separates Rückenteil und über den Beschlag verbundenes Nackenteil.

Head mechanism for two-piece back section with neck break.

Tête et dos indépendants, liaison réalisée par la ferrure.

K2

Gew.
Anfr.

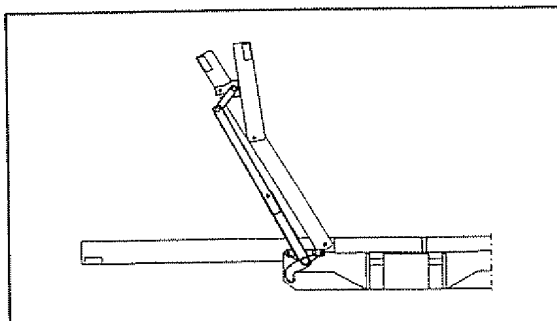


Kopfteilverstellung für klappbare innenliegende Nackenstütze.

Head mechanism for two piece section with internal neck break.

Relevage tête et dos indépendants, pour petite tête interne.

K7

Gew.
Anfr.

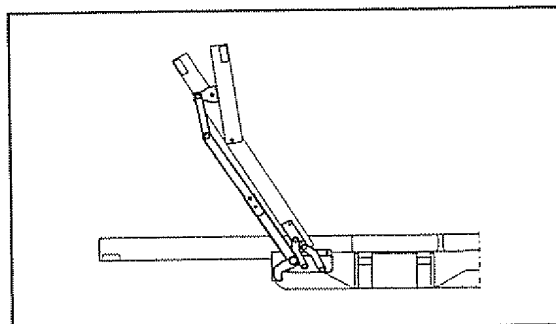


Kopfteilverstellung wie K2, zusätzlich schwenkendes Rückenteil, Längenausgleich für Matratze.

Head mech. as K2, in addition backward moving back section, length compensation for mattress.

Tête comme K2, avec articulation complètement progressive du dos.

K3

Gew.
Anfr.

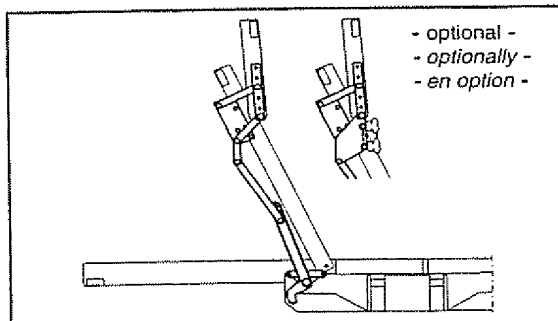

Kopfteilverstellung für schwenkbare Nackenstütze, Längenausgleich für Matratze.

Head mechanism for adjustable neck rest, length compensation for mattress.


Tête à extension télescopique soutient le matelas sur toute sa longueur.

Motorbeschläge für Lattenroste Fußteilbeschläge

Mechanisms for motorised bed frames Foot mechanisms

Mécanismes à moteurs pour cadres de sommiers Ferrure pieds

F2

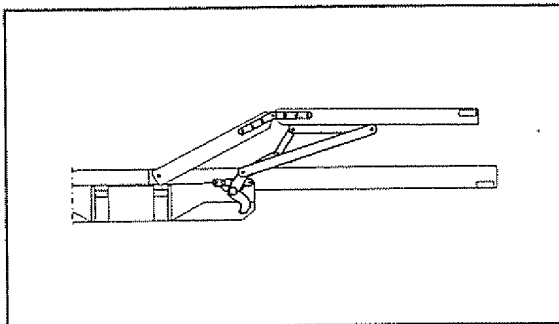


Gew.
Anfr.

Fußteilverstellung mit stabilem Hebebeschlag und guter seitlicher Führung.

Solid foot mechanism with stable guide lever.

Relève-pieds stable avec bon guidage latéral.

F4

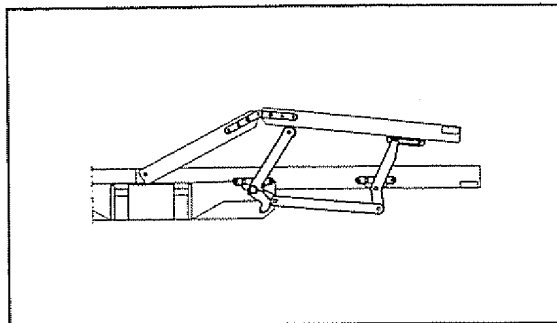


Gew.
Anfr.

Fußteilverstellung mit gestreckter Beinanhebung, dann Übergang zur Fußhangleage.

Foot mechanism with an initially parallel position, then transition to relax position.

Relevage initial tendu, puis passage à la position relax.

F7

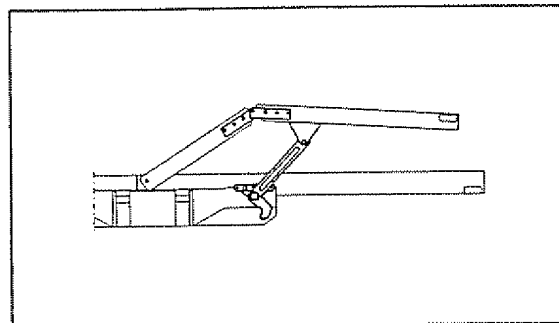

Gew.
Anfr.


Fußteilverstellung mit montagefreundlichem einfachem Hebebeschlag.

Simple foot mechanism with easy mounting.

Relève-pieds simple, facile à monter.

17264

NEU

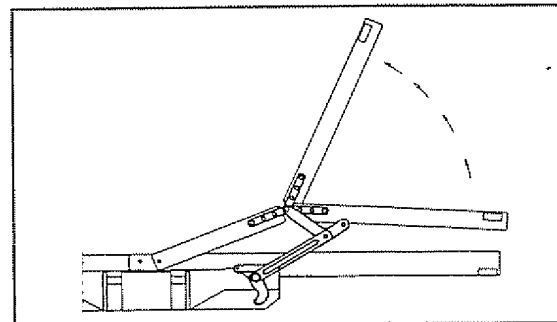


Gew.
Anfr.

Fußteilverstellung mit montagefreundlichem einfachem Hebebeschlag und **Bettkastenzugang**.

Simple foot mechanism with easy mounting and storage access.

Relève-pieds simple, facile à monter et lit coffre.

17250

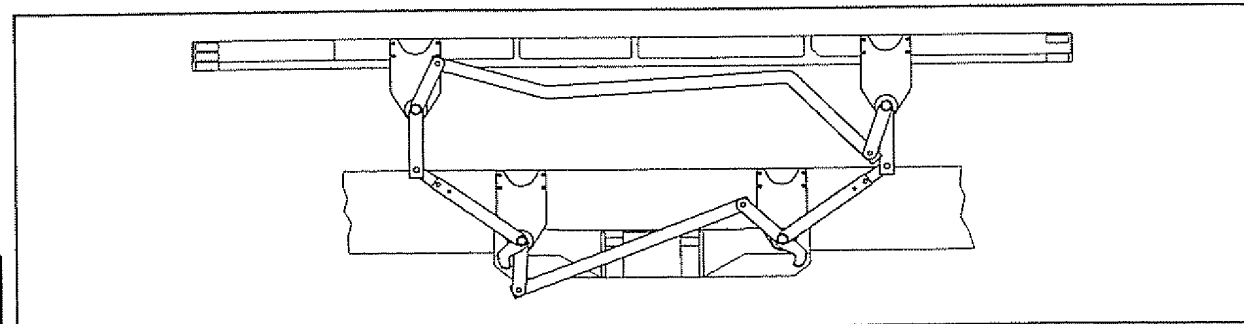

Gew.
16,8 kg

Beschlag zum Anheben von Standard-Einlegerahmen, erleichtert Ein- u. Aussteigen sowie Behandlung und Pflege.
- optional mit synchrongesteuertem **Doppel-Linearantrieb** - - Hubhöhe 35cm und Traglast 120kg -

Lift mechanism for standard bed frames, aids getting in and out of the bed, medical treatment and nursing.
- optionally with **double motor** (simultaneously) - - lifting height 35cm and load 120kg -



Ferrure élévatrice pour cadres, facilitant l'accès au lit, ainsi que l'administration de soins et traitements.
- également en option avec **double moteur** (simultané) - - hauteur de levage 35cm et force portante 120kg -

Perfektion in der Funktion

Motorbeschläge für Lattenroste
Mechanisms for motorised bed frames
Mécanismes à moteurs pour cadres de sommiers

17167



NEU

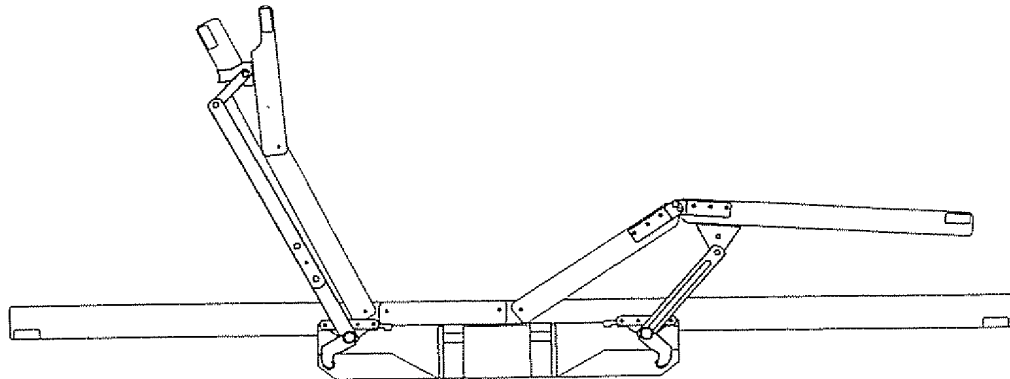

Die Schnellmontage erfolgt durch Einstecken der Traverse und Verdrehen in die Gebrauchslage.

Quick mounting by putting in the cross bar and turning it into final position.

Montage rapide en insérant la traverse et la tournant dans la position finale.

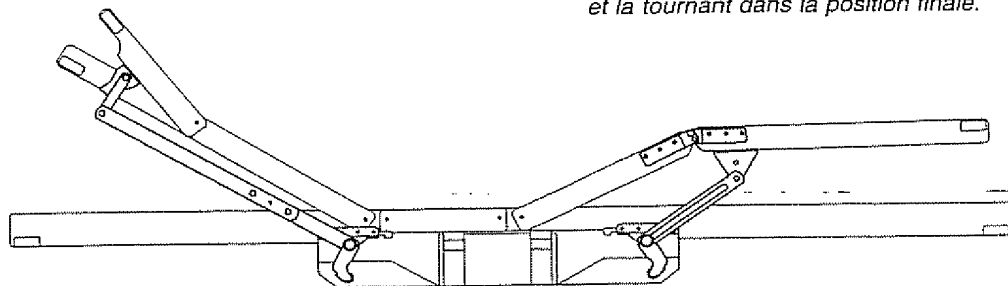

Gew.
4,5 kg

Kopfteilverstellung für klappbare innenliegende Nackenstütze und Fußteilverstellung mit einfachem Hebebeschlag.

- Schnellmontage durch steckbare Antriebstraversen -

Head mechanism for two piece section with internal neck break and simple foot mechanism.

- Quick mounting by cross bars with connectors -

Relevage tête et dos indépendants, pour petite tête interne et relève-pieds simple.

- Montage rapide par traverses de connexion -





Motorbeschläge für Lattenroste

Mechanisms for motorised bed frames

Mécanismes à moteurs pour cadres de sommiers

17267



NEU

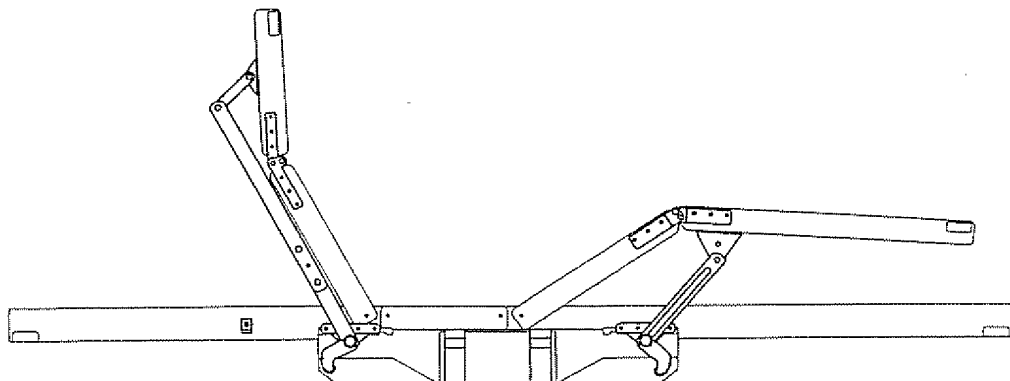

Die Schnellmontage erfolgt durch Einstecken der Traverse und Verdrehen in die Gebrauchslage.

Quick mounting by putting in the cross bar and turning it into final position.

Montage rapide en insérant la traverse et la tournant dans la position finale.

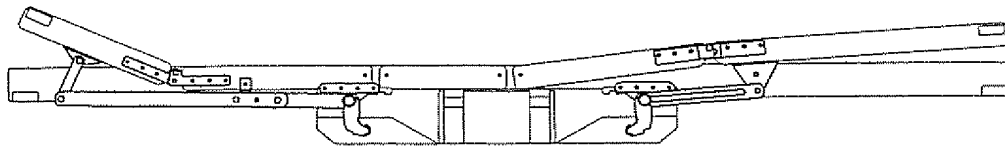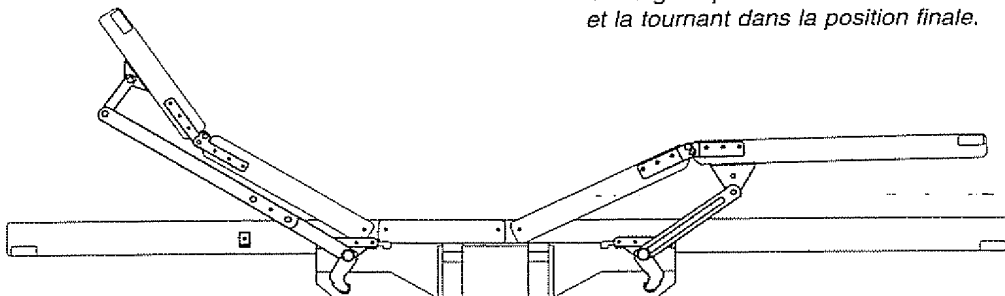

Gew.
4,8 kg

Kopfteilverstellung für separates Rückenteil und über den Beschlag verbundenes Nackenteil und Fußteilverstellung mit einfachem Hebebeschlag.

- Schnellmontage durch steckbare Antriebstraversen -

Head mechanism for two-piece back section with neck break and simple foot mechanism.


- Quick mounting by cross bars with connectors -

Tête et dos indépendants, liaison réalisée par la ferrure et relève-pieds simple.

- Montage rapide par traverses de connexion -

Motorbeschläge für Lattenroste 4-motorig
Mechanisms for motorised bed frames 4 motors
Mécanismes à moteurs pour cadres de sommiers 4 moteurs

17700

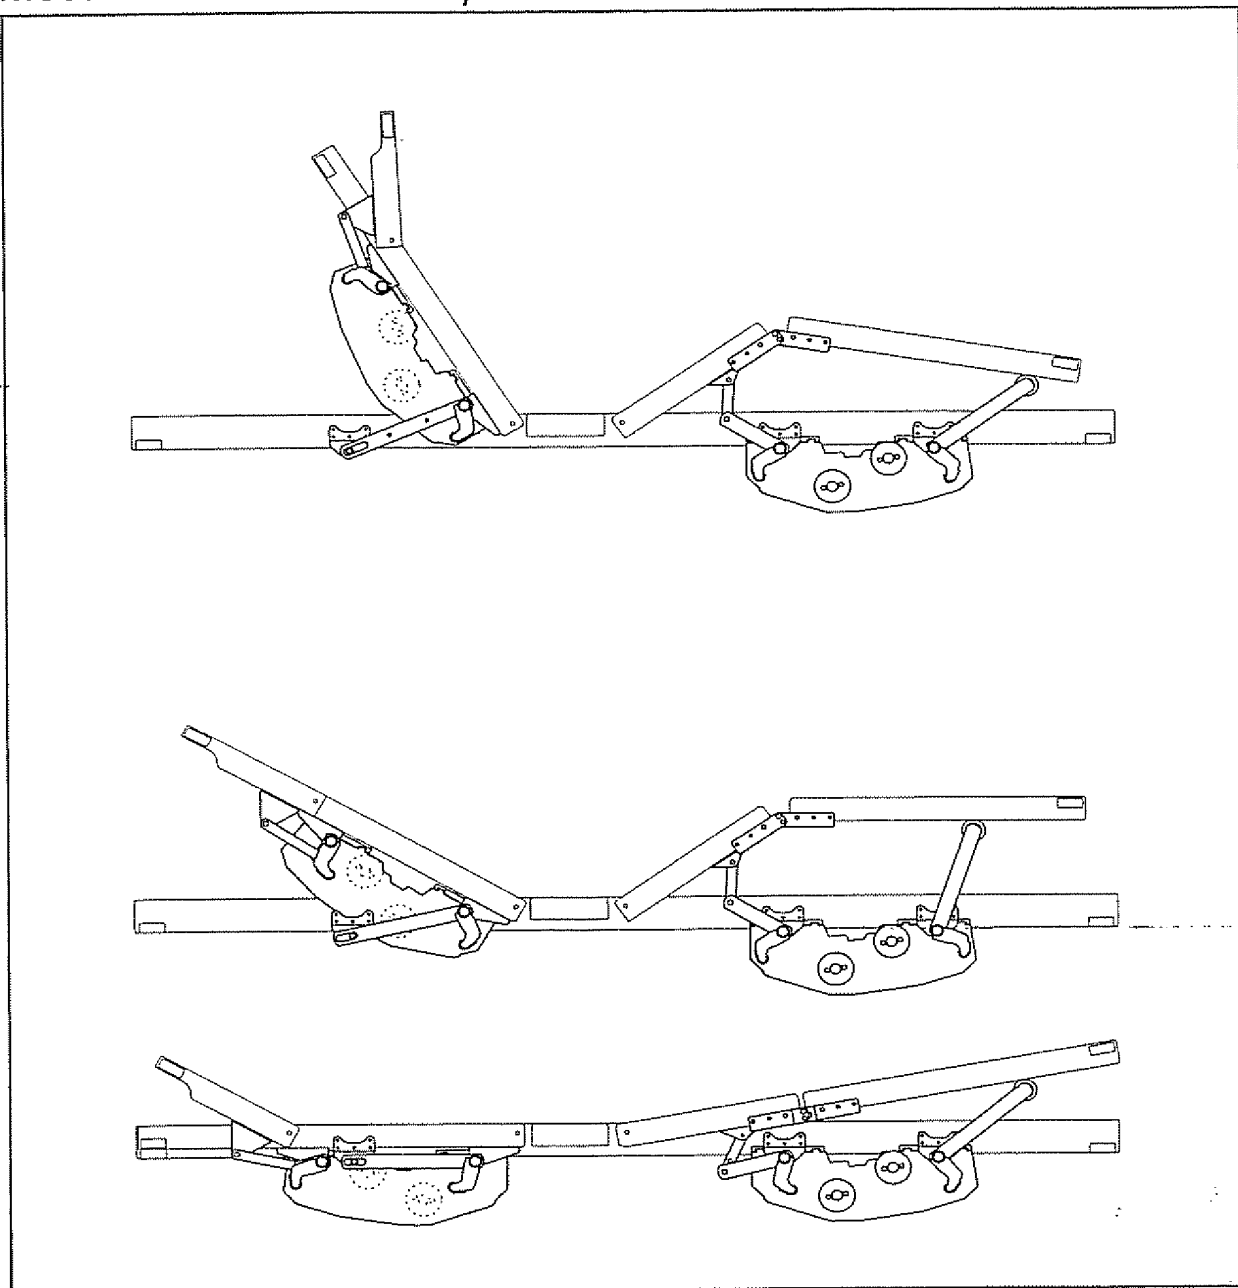

Gew.
15,0 kg


Rückenteil, innenliegendes Nackenteil, Oberschenkelteil und Fußteil separat mit je einem Motor individuell einstellbar, 4-motorig.
 - zwei Doppelantriebe Okimat 300 -

Back, internal neck, thigh and foot section each operated by one motor, 4 motors.
 - two double motors Okimat 300 -

Cadres dos, tête interne, cuisses et pieds réglables en totale indépendance, 4 moteurs.
 - deux doubles moteurs Okimat 300 -

Motorbeschläge für Lattenroste 4-motorig
Mechanisms for motorised bed frames 4 motors
Mécanismes à moteurs pour cadres de sommiers 4 moteurs

7710

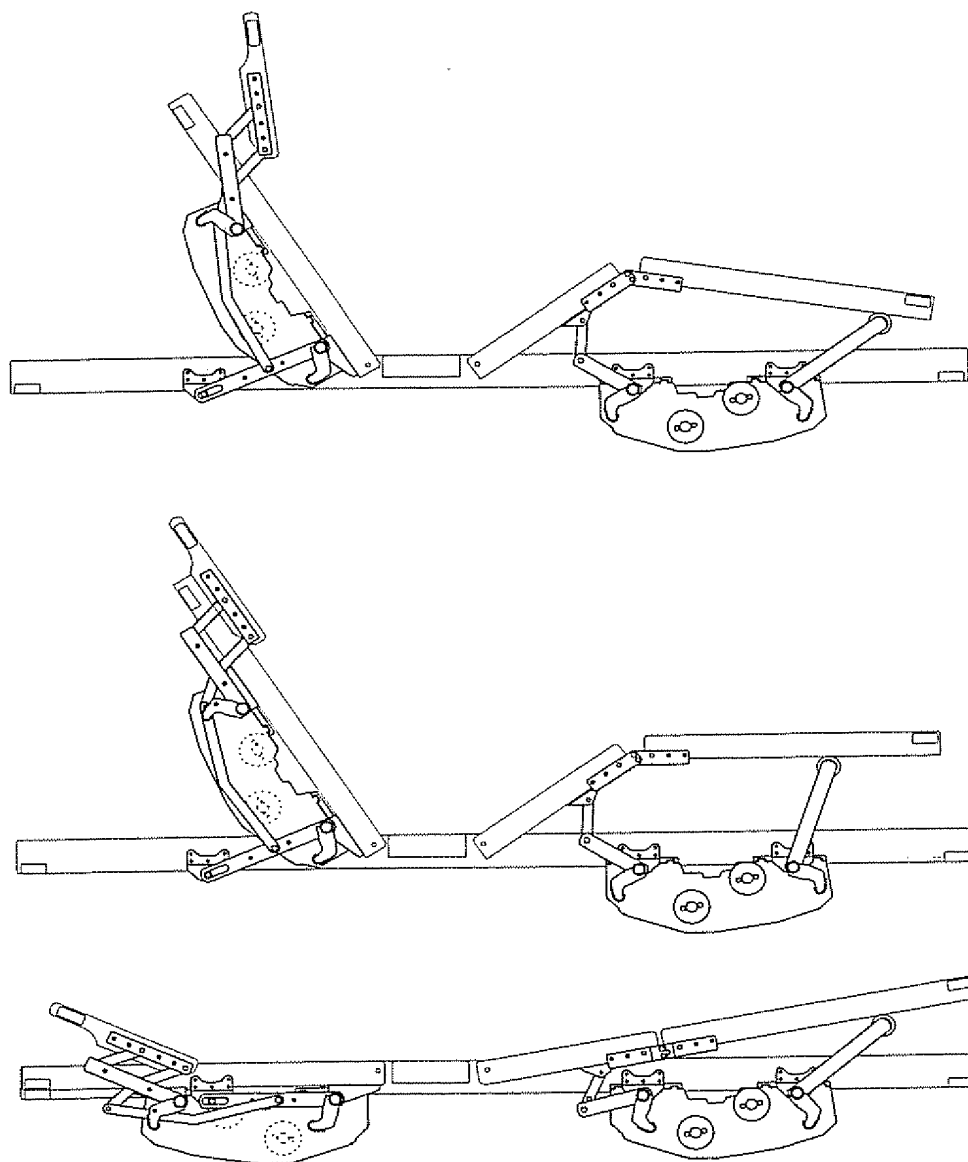

Gew.
17,2 kg

Rückenteil, schwenkbares Nackenteil mit Längenausgleich für Matratze, Oberschenkelteil und Fußteil separat mit je einem Motor individuell einstellbar, 4-motorig.
 - zwei Doppelantriebe Okimat 300 -

Back, adjustable neck with length compensation for mattress, thigh and foot section each operated by one motor, 4 motors.
 - two double motors Okimat 300 -


Cadre dos, tête à déploiement télescopique, (soutien du matelas sur toute sa longueur), parties cuisses et pieds réglables individuellement, 4 moteurs.
 - deux doubles moteurs Okimat 300 -

Motorbeschläge für Lattenroste 4-motorig
Mechanisms for motorised bed frames 4 motors
Mécanismes à moteurs pour cadres de sommiers 4 moteurs

17721

NEU

Gew.
Anfr.

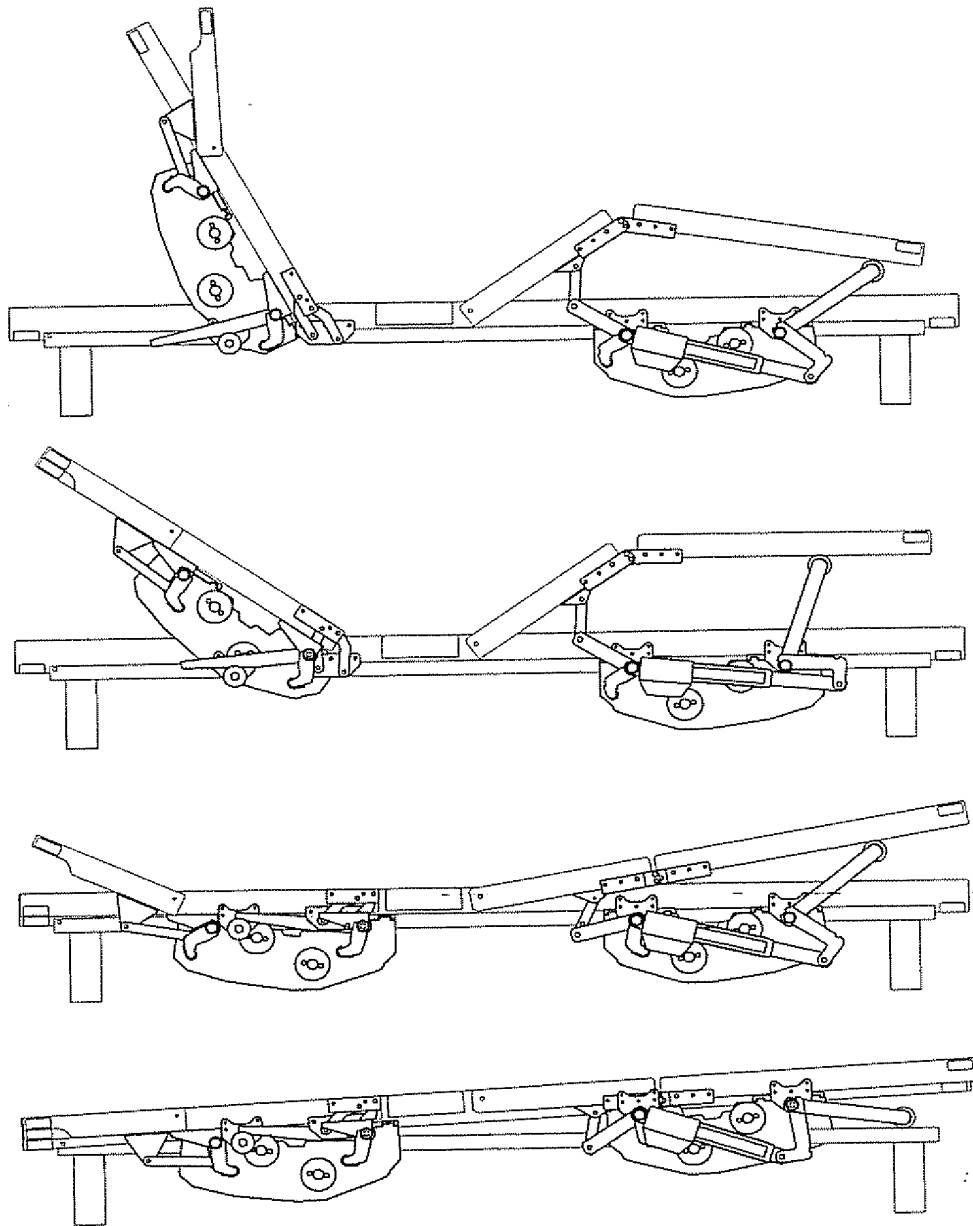

Schwenkendes Rückenteil mit Längenausgleich für Matratze, innenliegendes Nackenteil, Oberschenkelteil, Fußteil und Kippen des kompletten Rahmens separat mit je einem Motor individuell einstellbar, **4-motorig**.

Back with length compensation for mattress, internal neck rest, thigh, foot section and inclined movement of complete frame each operated by one motor, **4 motors**.

Dos à mouvement ouvrant, (soutien du matelas sur toute sa longueur) petite tête interne, cadres cuisses, pieds et inclinaison complète du cadre réglables individuellement, **4 moteurs**.

Wandklappbetten Cupboard beds Armoires-lits

Hoch- und Querklappbettbeschläge
ohne Querverbindung

Seite 22-26

*Cupboard bed mechanisms for high
and "transversal" cupboards without
transverse connection*

page 22-26

*Mécanismes pour armoires-lits et armoires-lits
"transversales" sans liaison transversale*

page 22-26

Hochklappbettbeschläge System Nr. 329...
mit Querverbindung

Seite 27-30

*Cupboard bed mechanisms system no. 329...
for high cupboards with transverse connection*

page 27-30

*Mécanismes de système no 329... pour
armoires-lits avec liaison transversale*

page 27-30

Zubehör für Klappbetten

Seite 31-33

Accessories for cupboard beds

page 31-33

Accessoires pour armoires-lits

page 31-33

Bitte beachten Sie


Die meisten Produkte sind **patentrechtlich** geschützt.
Änderungen, die dem technischen **Fortschritt** oder der
Sicherheit dienen, behalten wir uns vor.

Please note

Most of the products are protected by **patent**.
We reserve the right to alterations to the mechanisms in
the interest of **safety** and technical **progress**.

Remarques


La plupart de nos produits sont **brevetés**.
Sous réserve de toutes modifications allant dans le sens
du **progrès technique** et d'une plus grande **sécurité**.

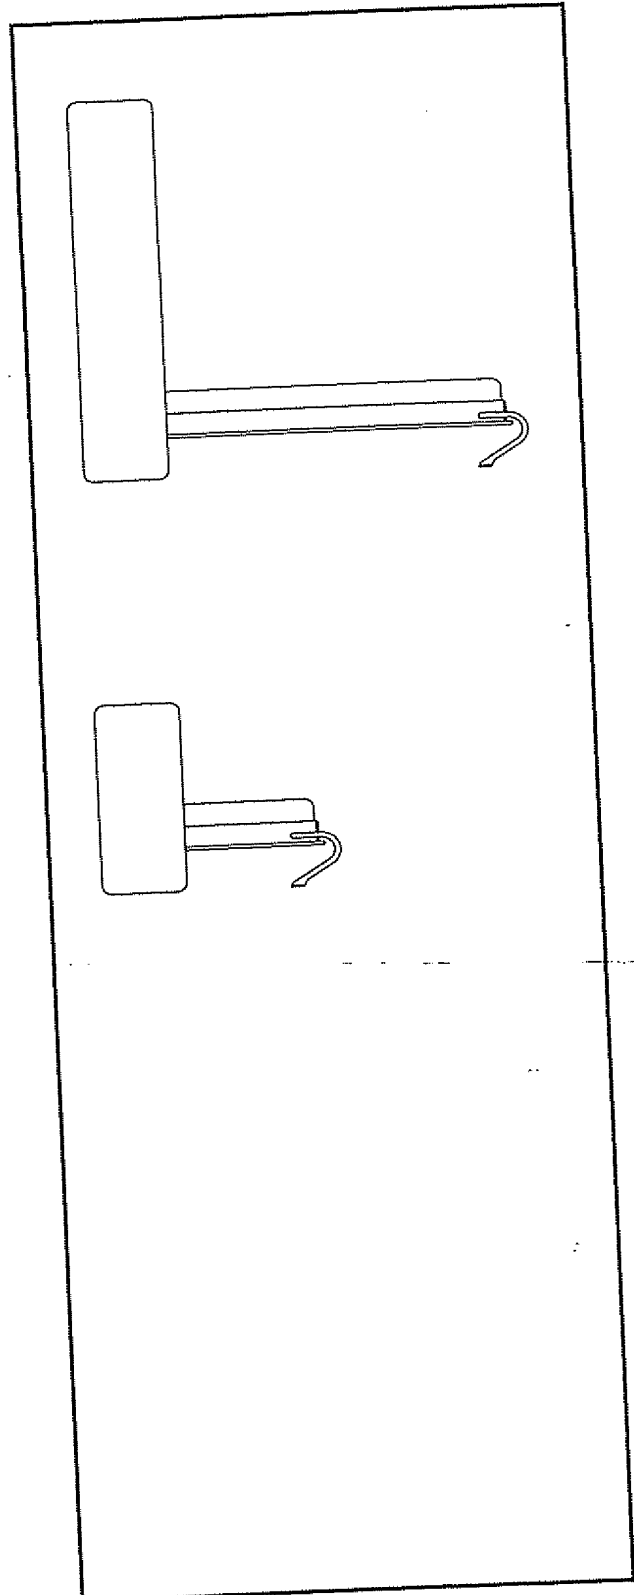

Hoch- und Querklappbettbeschläge

Cupboard bed mechanisms for high and "transversal" cupboards

Mécanismes pour armoires-lits et armoires-lits "transversales"

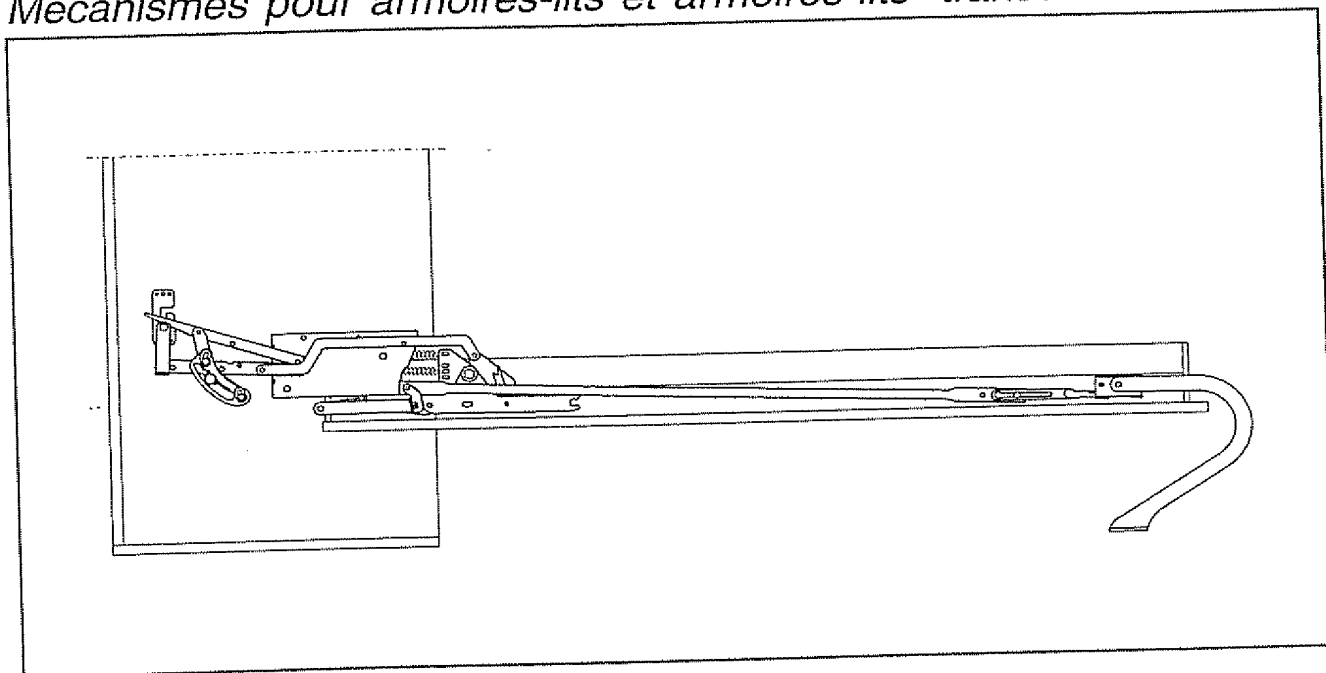

- Beschläge paarweise ohne Querverbindung.
- Leichtes Einhängen der Türfront durch Arretierung des Beschlages mit Montagehilfshebel in leicht geöffneten Stellung.
- Alle Klappbetten wahlweise mit automatischem oder manuellem Fuß.
- Höhenjustierung durch Exzentrerscheiben.
- Beschläge, getestet im Kundenmodell, nach EN 1129-1 TÜV bzw. GS abgenommen.
- Beschlagsoberflächen verzinkt, pulverbeschichtet oder einbrennlackiert.
- Qualitätsüberprüfung durch Dauertests.
- Beschlagsbemusterung komplett eingebaut im Kundenmodell möglich.
- CAD-Einbauzeichnungen vorhanden.
- Mechanisms in pairs, without transverse connection.
- Easy mounting of the front panel in slightly opened position due to detent of mechanism by aid levers.
- All beds available either with automatic or manual foot.
- Height adjustable by excentric nuts.
- Mechanisms, tested in customers' models, have passed legal security standards EN 1129-1 TÜV and/or GS.
- Surface galvanised or in lacquered finish.
- Quality assured by continuous testing.
- Samples can be delivered mounted in customers' model.
- CAD-mounting drawings are available.
- Ferrures par paire, sans liaison transversale.
- Accrochage aisé des portes par blocage de la ferrure à l'aide de leviers de montage, en position entr'ouverte.
- Tous les lits disponibles avec pieds automatiques ou manuels.
- Hauteur ajustable par rondelles excentriques.
- Ferrures, testées sur modèle du client, selon EN 1129-1 certifiées TÜV et/ou GS.
- Surfaces des ferrures zinguées ou laquées au four, ou teintées epoxy.
- Contrôle qualité par tests permanents.
- Possibilité de monter des échantillons dans les modèles de nos clients.
- Plans de montage CAD disponibles.




Neuheiten seit der Interzum 2001.
New developments since Interzum 2001.
Nouveautés depuis Interzum 2001.

Gew.
ca. kg

Beschlagsgewicht inklusive Kleinteile.
Weight of mechanism including accessories.
Poids de la ferrure, accessoires compris.

Hochklappbettbeschläge Cupboard bed mechanisms Mécanismes pour armoires-lits

31073
plus
325...

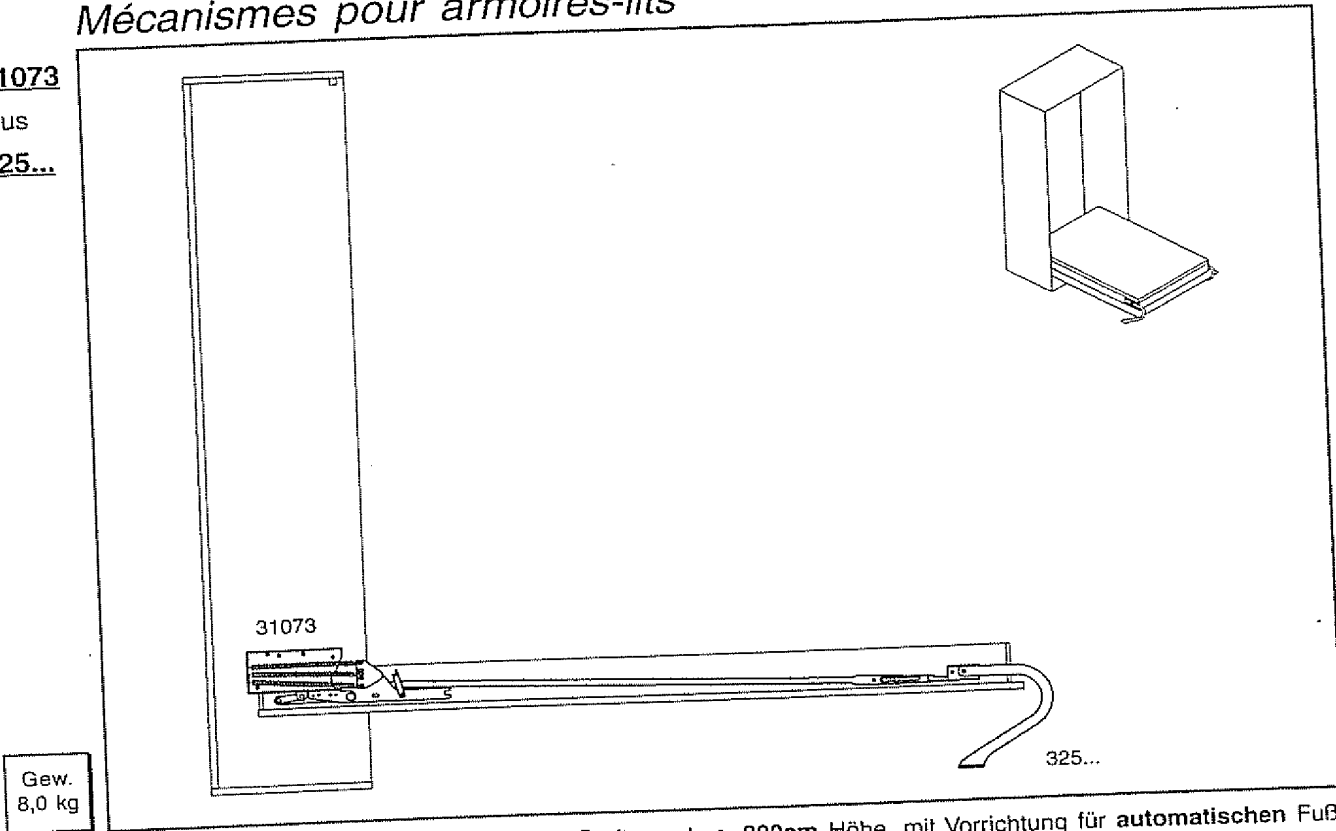


Gew.
8,0 kg

Beschlag für Hochklappbetten bis 100cm Breite und ca. 200cm Höhe, mit Vorrichtung für **automatischen Fuß**, Lieferung mit **eingehängten Federn**.

Mechanism for cupboard beds up to 100cm width and about 200cm height, suitable for **automatic foot**, delivery with **mounted springs**.

Ferrure pour armoires jusqu'à une largeur de 100cm et une hauteur d'environ 200cm, pour **pied-automatique**, ferrure avec ressorts **montés**.

31073

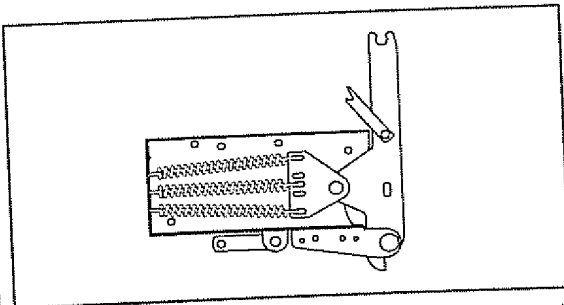


Gew.
4,0 kg

Kastenbeschlag für **automatischen Schwenkfuß**, mit bis zu vier Zugfedern F_n 400N oder 700N.

Mechanism for **automatic foot**, with up to **four tension springs** F_n 400N or 700N.

Ferrure pour pied **automatique**, avec jusqu'à **quatre ressorts-traction** de F_n 400N ou 700N.

31070

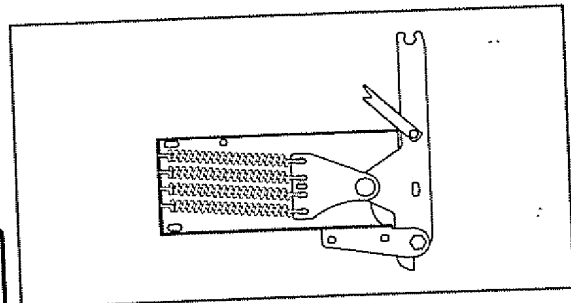

Gew.
4,0 kg

Kastenbeschlag für **manuellen Schwenkfuß**, mit bis zu vier Zugfedern F_n 400N oder 700N.

Mechanism for **manually operated foot**, with up to **four tension springs** F_n 400N or 700N.

Ferrure pour pied **manuel**, avec jusqu'à **quatre ressorts-traction** de F_n 400N ou 700N.

Hochklappbettbeschlge Cupboard bed mechanisms M canismes pour armoires-lits

31073

plus


325...

plus

37113

plus...

Gew.
9,2 kg

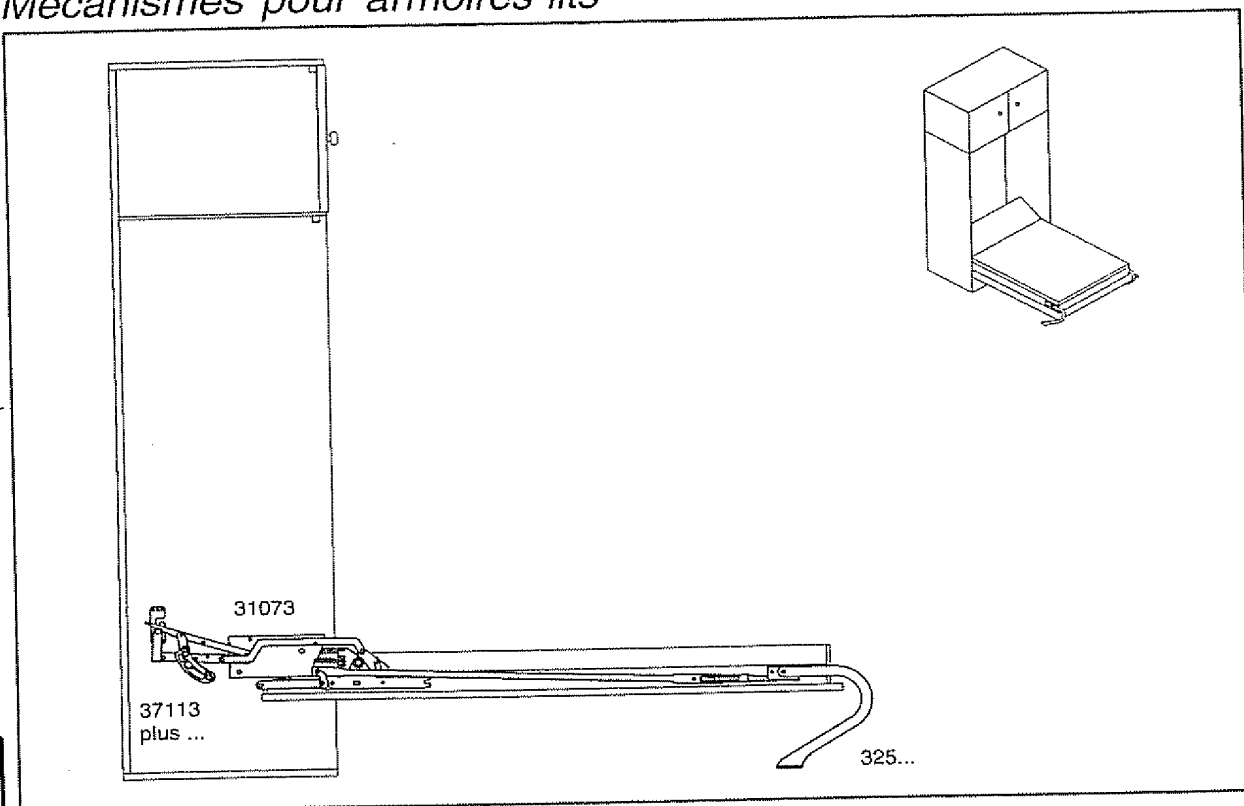

Beschlag f r Hochklappbetten bis **100cm** Breite und ca. **170cm** H he, mit Vorrichtung f r **automatischen** Fu  und 3fach **rastbares** Kopfteil, Lieferung mit **eingeh ngten** Federn.

Mechanism for cupboard beds up to **100cm** width and about **170cm** height, suitable for **automatic** foot and headrest with three **click-stops**, delivery with **mounted** springs...

Ferrure pour armoires jusqu'  une largeur de **100cm** et une hauteur d'environ **170cm**, pour pied **automatique** et t ti re **crant e** avec trois positions, ferrure avec ressorts **mont s**.

37113


plus

37116

plus

37117

Gew.
1,2 kg

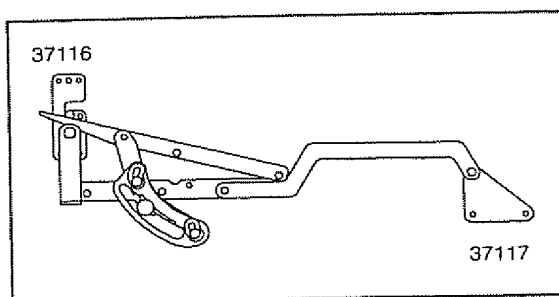

Kopfteil mit 3fach **Rasterung**, **37116** Einh ngeblech und **37117** Platte bitte mitbestellen.

Headrest with three **click-stops**, **37116** mounting plate and **37117** plate to be ordered separately.

Ferrure t ti re **crant e** avec trois pos., **37116** plaque d'accrochage et **37117** plaque   commander.


- Beschl ge f r Raumsparbetten mit einer Kastenh he von ca. **170cm** und einer Liegel nge von **200cm**.
- Vorgesehen f r Rahmen mit Federholzleisten, die die Seitenwinkel des Kopfteils miteinander verbinden.
- Vorgesehen f r Verwendung mit quergeteilten Matratzen.

- Mechanisms for space-saving cupboard beds with height of about **170cm** and mattress size of **200cm**.
- Suited for frames with wooden slats which connect the side angles of the head section.
- Suited for use of two-part mattresses.

- Ferrures pour volumes r duits, hauteur env. **170cm**, longueur couchage de **200cm**.
- Pr vues pour cadres   lattes reliant les corni res de la t ti re.
- Pr vues pour l'utilisation de matelas en deux parties.

Hochklapptbettbeschläge Cupboard bed mechanisms Mécanismes pour armoires-lits

30310
plus
31100

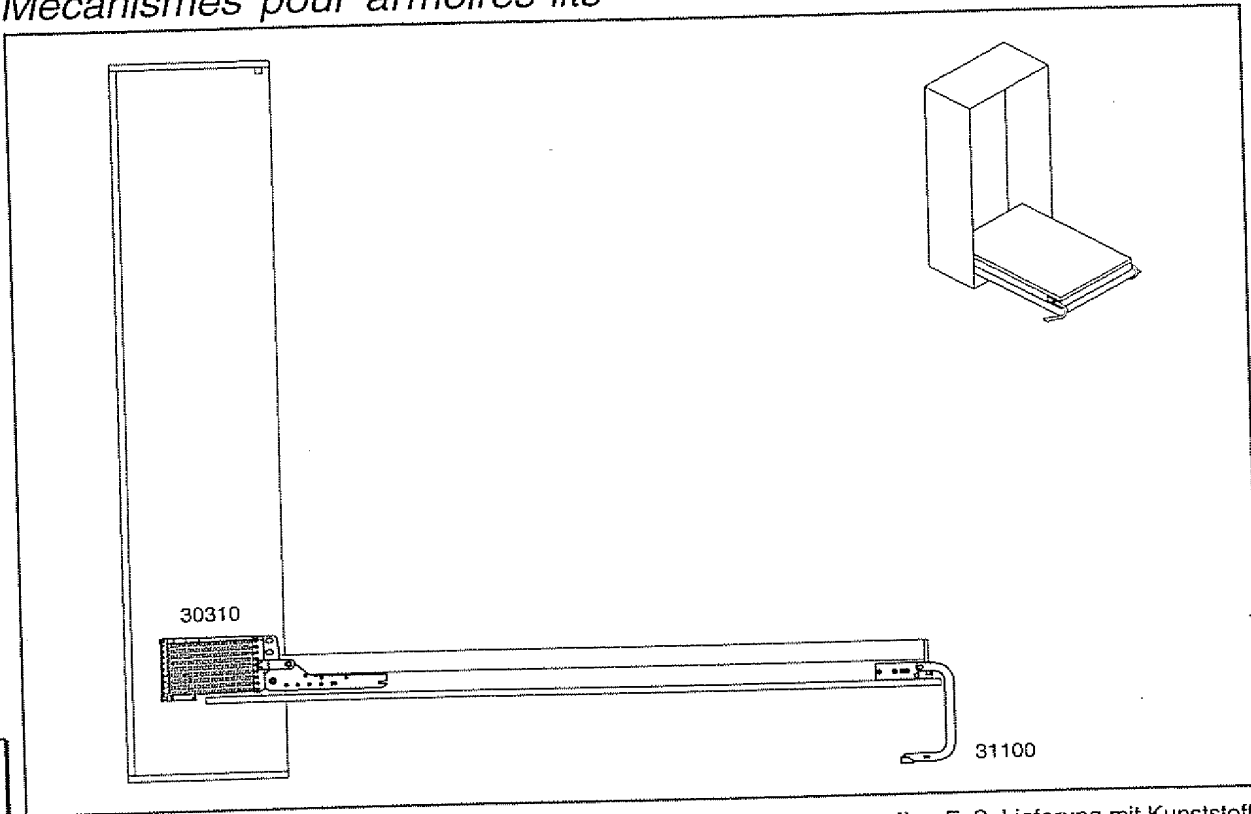

Gew.
6,5 kg


Beschlag für Hochklapptbetten bis 150cm Breite und ca. 200cm Höhe, für **manuellen** Fuß, Lieferung mit Kunststoffabdeckung und losen Federn.

Mechanism for cupboard beds up to 150cm width and about 200cm height, suitable for **manual** foot, delivery with separate plastic cover and springs not mounted.

Ferrure pour armoires jusqu'à une largeur de 150cm et une hauteur d'environ 200cm, pour pied **manuel**, ferrure avec caches séparés et ressorts non montés.

30310

Gew.
5,0 kg

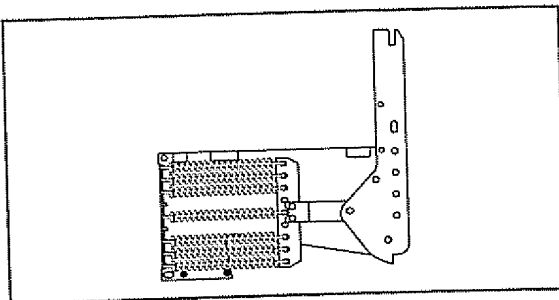


Kastenbeschlag mit seitlicher Verschraubung, mit bis zu **neun** Zugfedern F_n 640N oder 850N.
- 30340 mit bis zu **sieben** Zugfedern -

Mechanism with mounting at side of frame, with up to **nine** tension springs F_n 640N or 850N.
- 30340 with up to **seven** tension springs -

Ferrure avec fixation latérale, avec jusqu'à **neuf** ressorts-traction de F_n 640N ou 850N.
- 30340 avec jusqu'à **sept** ressorts-traction -

30110

Gew.
5,0 kg

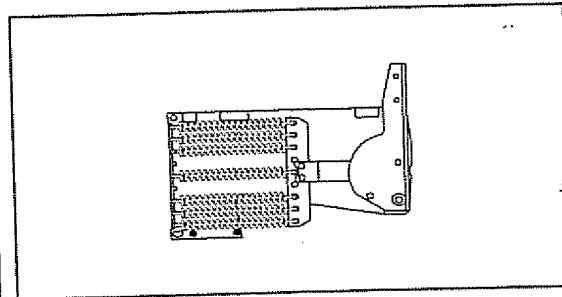

Kastenbeschlag mit frontaler Verschraubung, mit bis zu **neun** Zugfedern F_n 640N oder 850N.

Mechanism with mounting at bottom side of frame, with up to **nine** tension springs F_n 640N or 850N.

Ferrure avec fixation frontale, avec jusqu'à **neuf** ressorts-traction de F_n 640N ou 850N.


Querklappbettbeschläge Cupboard bed mechanisms "transverse" Mécanismes pour armoires-lits "transversales"

31091

plus

325...

Gew.
7,5 kg

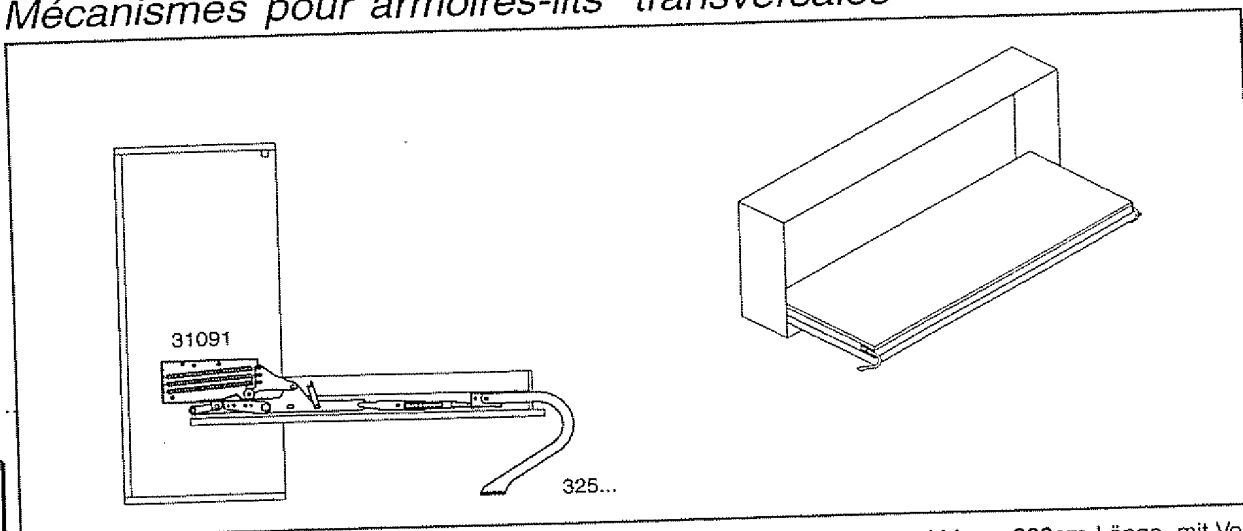


Beschlag für Querklappbetten mit einer Liegefläche von 90cm bis 100cm Breite und bis zu 200cm Länge, mit Vorrichtung für **automatischen Fuß**, Lieferung mit **eingehängten Federn**.

Mechanism for cupboard beds with mattress of 90cm up to 100cm width and up to 200cm length, suitable for **auto-matic foot**, delivery with **mounted springs**.

Ferrure pour armoires avec matelas de 90cm à 100cm de large et longueur jusqu'à 200cm, pour pied **automatique**, ferrure avec ressorts **montés**.


31096

Gew.
4,0 kg

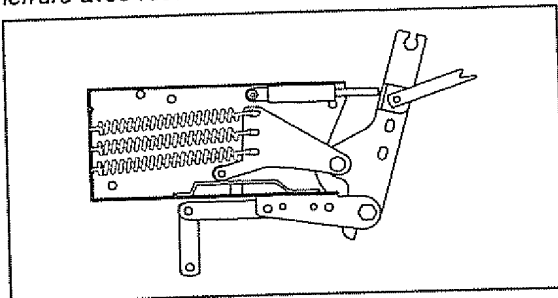


31075

Gew.
3,9 kg

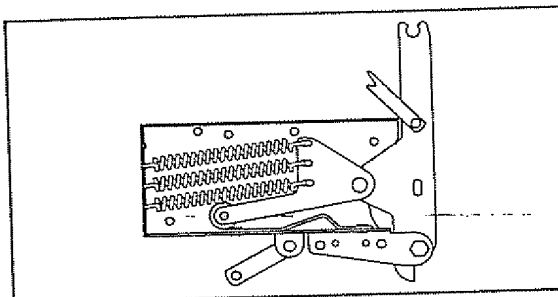


31090

Gew.
3,8 kg

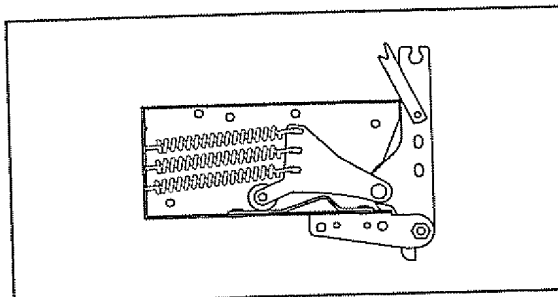

31095

Gew.
3,5 kg

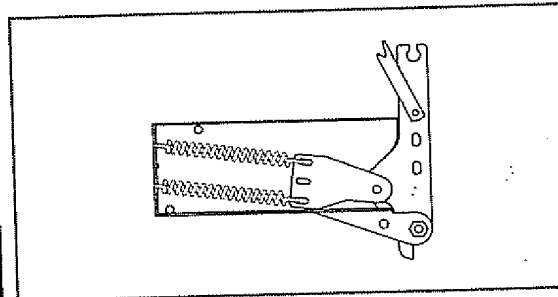


Kastenbeschläge mit bis zu **drei** Zugfedern F_n 270N, 400N oder 660N, Nr. 31091, 31096 und 31075 für automati-schen Fuß, Nr. 31090 und 31095 für manuellen Fuß, Nr. 31091, 31096, 31075 und 31090 mit Sicherheitseinrichtung gegen unbeabsichtigtes Schließen, Nr. 31096 mit Anschlagdämpfer, Nr. 31075 für Liegebreiten bis 120cm.

Mechanisms for up to **three** tension springs F_n 270N, 400N or 660N, mechanisms 31091, 31096 and 31075 are for automatic foot, mechanisms 31090 and 31095 are for manually operated foot, mechanisms 31091, 31096, 31075 and 31090 are with security function against unintentional closing of cupboard bed, mechanism 31096 with hydraulic damping device, mechanism 31075 for cupboard beds with mattress up to 120cm width.

Ferrures pour jusqu'à **trois** ressorts F_n 270N, 400N or 660N, ferrures 31091, 31096 et 31075 pour pied automatique, ferrures 31090 et 31095 pour pied manuel, ferrures 31091, 31096, 31075 and 31090 avec sécurité contre fermeture involontaire, ferrure 31096 amortissement de fermeture, ferrure 31075 pour matelas jusque 120cm de large.

Hochklapptbettbeschläge System Nr. 329... Cupboard bed mechanisms system no. 329... Mécanismes système no 329... pour armoires-lits

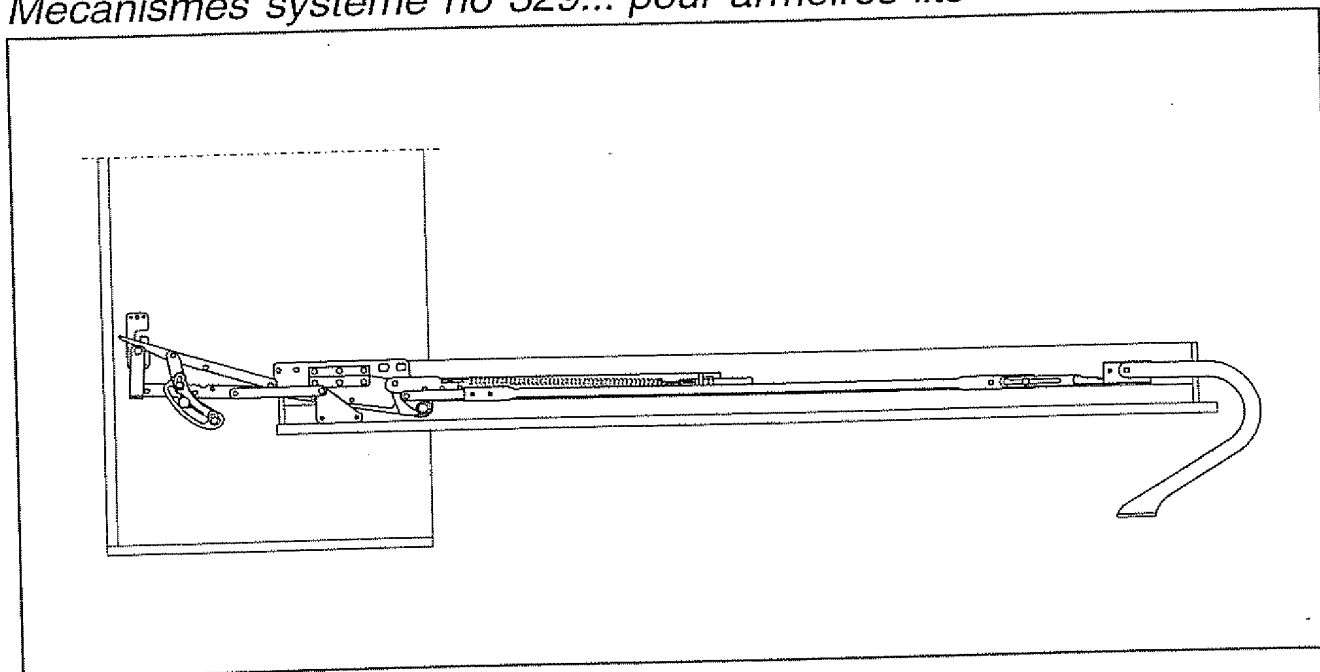

- | | | |
|--|---|---|
| • Beschläge mit stabiler Querverbindung. | • Mechanisms with solid transverse connection. | • Ferrures avec liaison transversale rigide. |
| • Beschläge mit Mittelkonstruktion für Doppelbetten. | • Mechanisms with construction for centre, for double beds. | • Ferrures avec construction centrale pour lits doubles. |
| • Beschläge für eine bis drei markierte Zugfedern, nachträglich einstellbar.
Fn 1250N neutr., Fn 1700N blau
Fn 2300N rot, Fn 3700N Überlänge | • Mechanisms for one up to three marked springs, subsequently adjustable.
Fn 1250N neutral, Fn 1700N blue
Fn 2300N red, Fn 3700N extra long | • Ferrures pour jusqu'à trois ressorts marqués, ajustables après montage.
Fn 1250N neutre, Fn 1700N bleu
Fn 2300N rouge, Fn 3700N plus long |
| • Höhenjustierung durch Exzenterscheiben. | • Height adjustable by excentric nuts. | • Hauteur ajustable par rondelles excentriques. |
| • Beschläge, getestet im Kundenmodell, nach EN 1129-1 TÜV bzw. GS abgenommen. | • Mechanisms, tested in customers' models, have passed legal security standards EN 1129-1 TÜV and/or GS. | • Ferrures, testées sur modèle du client, selon EN 1129-1 certifiées TÜV et/ou GS. |
| • Beschlagsoberflächen verzinkt, pulverbeschichtet oder einbrennlackiert. | • Surface galvanised or in lacquered finish. | • Surfaces des ferrures zinguées ou laquées au four, ou teintées epoxy. |
| • Qualitätsüberprüfung durch Dauertests. | • Quality assured by continuous testing. | • Contrôle qualité par tests permanents. |
| • Beschlagsbemusterung komplett eingebaut im Kundenmodell möglich. | • Samples can be delivered mounted in customers' model. | • Possibilité de monter des échantillons dans les modèles de nos clients. |
| • CAD-Einbauzeichnungen vorhanden. | • CAD-mounting drawings are available. | • Plans de montage CAD disponibles. |

NEU

Neuheiten seit der interzum 2001.
New developments since interzum 2001.
Nouveautés depuis interzum 2001.

**Gew.
ca. kg**

Beschlagsgewicht inklusive Kleinteile.
Weight of mechanism including accessories.
Poids de la ferrure, accessoires compris.

Perfektion in der Funktion


Hochklappbettbeschläge System Nr. 329... Cupboard bed mechanisms system no. 329... Mécanismes système no 329... pour armoires-lits

32942

plus

325...


Gew.
12,0 kg

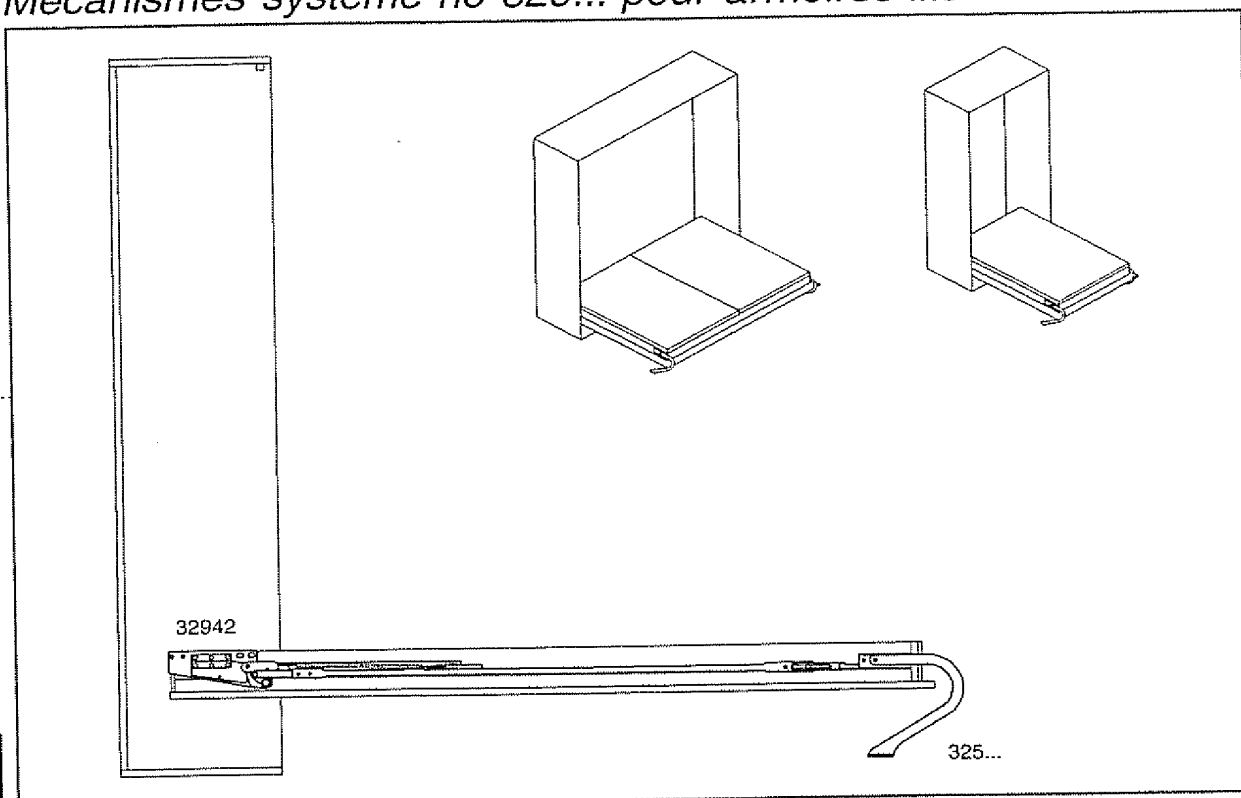

Beschlag für Hochklappbetten bis **200cm** Breite und ca. **210cm** Höhe, mit Vorrichtung für **automatischen Fuß**, Lieferung mit **losen Federn**.
- **32902** Beschlag für **manuellen Fuß** -

Mechanism for cupboard beds up to **200cm** width and about **210cm** height, suitable for **automatic foot**, delivery with **springs not mounted**.
- **32902** mechanism for **manual foot** -


Ferrure pour armoires jusqu'à une largeur de **200cm** et une hauteur d'environ **210cm**, pour pied **automatique**, ferrure avec ressorts non montés.
- **32902** ferrure avec pied **manual** -

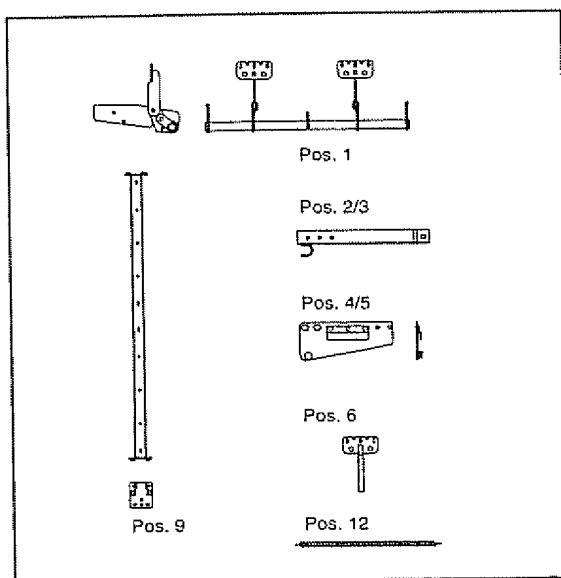

- Pos.1 Traversenbeschlag komplett
Cross bar mechanism <> Ferrure traverse
- Pos.2/3 Lagerbock komplett links/rechts
Angle with pivot bearing l/r <>
Angle avec coussinet de pivotement g/d
- Pos.4/5 Seitenblech komplett links/rechts
Side plate l/r <> Plaque latérale g/d
- Pos.6 Federlasche mit Gewindestange komplett
Spring attachment with threaded rod <>
Attache de ressorts avec tige filetée
- Pos.9 Türfronthalter komplett
Front panel holder, U-section <>
Support de facade, U-profil
- Pos.12 Zugfeder
Tension spring <> Ressort-traction

Hochklappbettbeschläge System Nr. 329... Cupboard bed mechanisms system no. 329... Mécanismes système no 329... pour armoires-lits

32942
plus
325...
plus
37114
plus...

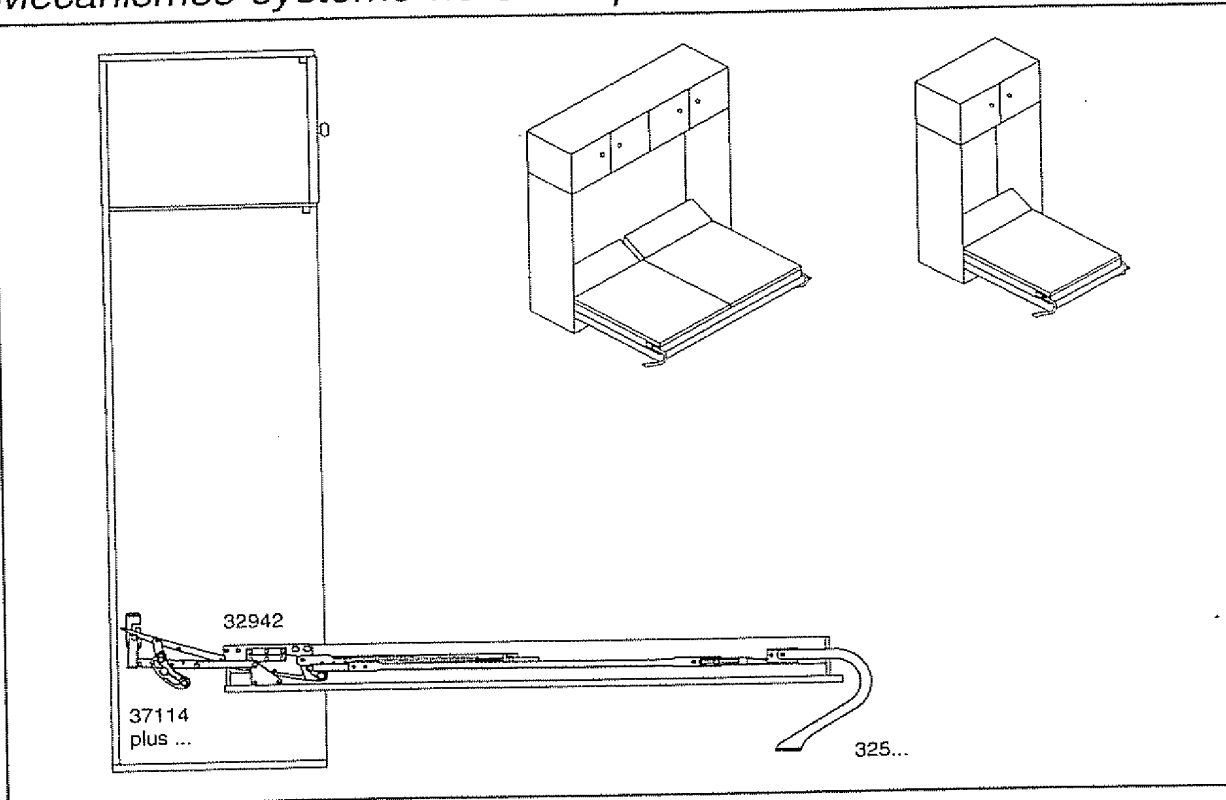


Beschlag für Hochklappbetten bis **200cm** Breite und ca. **170cm** Höhe, mit Vorrichtung für **automatischen** Fuß und 3fach **rastbares** Kopfteil, Lieferung mit **losen** Federn.

*Mechanism for cupboard beds up to **200cm** width and about **170cm** height, suitable for **automatic** foot and headrest with three **click-stops**, delivery with **springs** not mounted.*

*Ferrure pour armoires jusqu'à une largeur de **200cm** et une hauteur d'environ **170cm**, pour pied **automatique** et tête **crantée** avec trois positions, ferrure avec ressorts non montés.*

37114
plus
37116
plus
37117

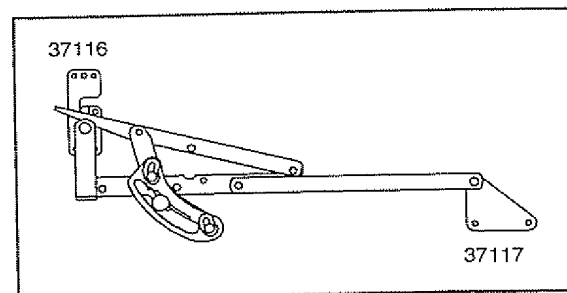

Kopfteil mit 3fach **Rasterung**, **37116** Einhängeblech und **37117** Platte bitte mitbestellen.

*Headrest with three **click-stops**, **37116** mounting plate and **37117** plate to be ordered separately.*

*Ferrure tête **crantée** avec trois pos., **37116** platine d'accrochage et **37117** plaque à séparément commander.*

- Beschläge für Raumsparbetten mit einer Kastenhöhe von ca. **170cm** und einer Liegelänge von **200cm**.
- Vorgesehen für Rahmen mit Federholzleisten, die die Seitenwinkel des Kopfteils miteinander verbinden.
- Vorgesehen für Verwendung mit quergeteilten Matratzen.

- *Mechanisms for space-saving cupboard beds with height of about **170cm** and mattress size of **200cm**.*
- *Suited for frames with wooden slats, which connect the side angles of the head section.*
- *Suited for use of two-part mattresses.*

- *Ferrures pour volumes réduits, hauteur env. **170cm**, longueur couchage de **200cm**.*
- *Prévues pour cadres à lattes reliant les cornières de la tête.*
- *Prévues pour l'utilisation de matelas en deux parties.*

Hochklappbettbeschlge System Nr. 329... Cupboard bed mechanisms system no. 329... Mcanismes systme no 329... pour armoires-lits

32943

plus


325...

plus

37114

plus...


Gew.
14,0 kg

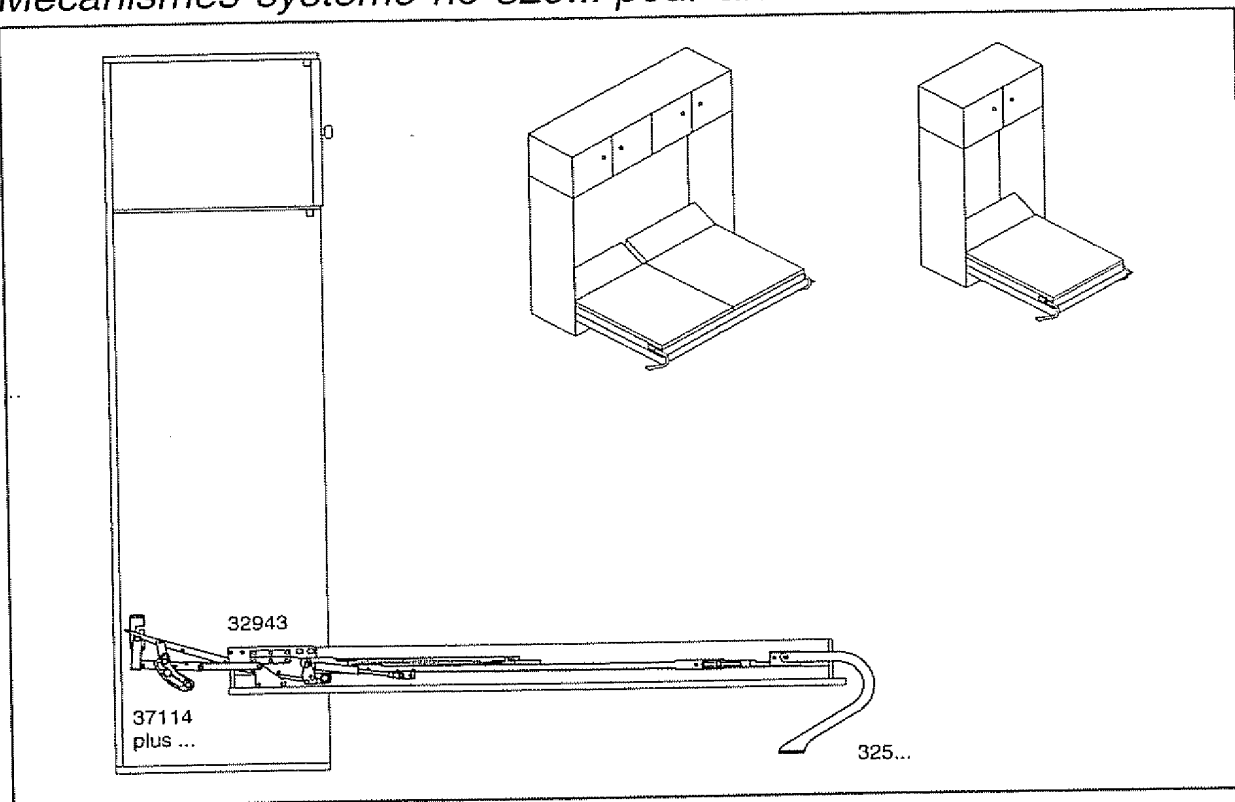

Beschlag fr Hochklappbetten bis **200cm** Breite und ca. **170cm** Hhe, mit Vorrichtung fr **automatischen** Fuß und
3fach **rastbares** Kopfteil. - mit **Anschlagdmpfung** -

Mechanism for cupboard beds up to **200cm** width and about **170cm** height, suitable for **automatic** foot and headrest
with three **click-stops**. - with **hydraulic damping device** -

Ferrure pour armoires jusqu' une largeur de **200cm** et une hauteur d'environ **170cm**, pour pied **automatique** et
ttire **crante** avec trois positions. - avec **amortissement** -

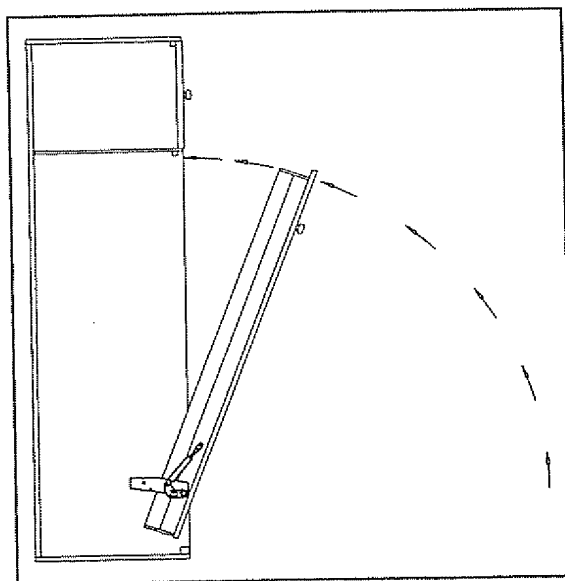


Die Anschlagdmpfung verhindert das starke Zuschlagen des Hochklappbettes. Durch mechanischen Freilauf beginnt die Dmpfung erst im letzten Drittel des Bewegungsablaufes und verringert die Schliegeschwindigkeit der Trfront. Das Hochklappbett schliet sanft und geruschlos. Der verwendete ldmpfer ist ein Sicherheitsbauteil, das sich in der Autoindustrie bereits bestens bewhrt hat.

The hydraulic damping device avoids the hard closing of the cupboard bed. Due to a mechanical free travel the damping starts only in the last third of closing movement and reduces the closing speed of the front. The cupboard bed closes now softly and noiselessly. The used oil damper is a security component well proved in the "automotive industry".

L'amortissement permet une fermeture en douceur du lit. L'effet d'amortissement ne dbute que dans le dernier tiers du mouvement de rentre et vite la fermeture trop rapide du panneau-porte qui se fait en douceur et sans bruit. Le systme hydraulique utilis est d'une grande fiabilit, bien connu et prouv dans l'industrie automobile.

Kopfteilbeschläge für Hochklappbetten Headrest mechanisms for cupboard beds Mécanismes tête pour armoires-lits

30800

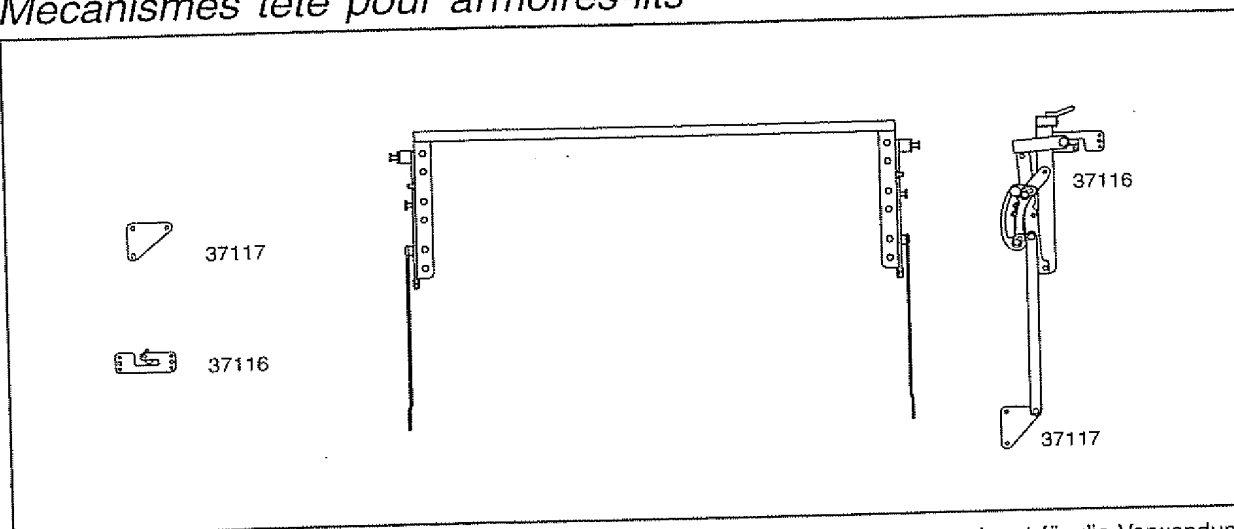


Gew.
3,0 kg

Beschlag mit Metallrahmen für Einzelbetten mit 3fach **rastender** Kopfteilverstellung, geeignet für die Verwendung von einzelnen Federholzleisten, die in die Seitenwinkel eingesteckt werden.

Mechanism with metal frame for single beds with three position **click-stop**, suited for use of separate wooden slats, which are to be attached into the side angles.

Ferrure avec cadre métallique pour lits simples, avec tête à **trois positions**, convient à l'utilisation de lattes à insérer dans les cornières latérales.

30810

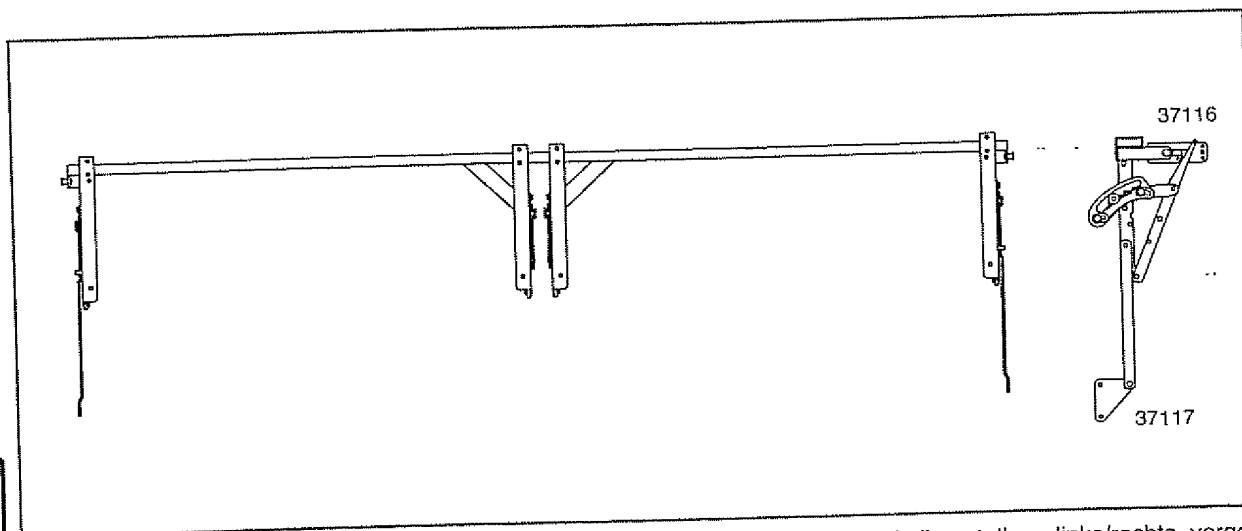

Gew.
5,0 kg

Beschlag mit Metallrahmen für Doppelbetten mit getrennter 3fach **rastender** Kopfteilverstellung links/rechts, vorgesehen für Rahmen mit Federholzleisten, die die Seitenwinkel miteinander verbinden.


Mechanism with metal frame for double beds with individual l/r three position **click-stop**, suited for use of frame with wooden slats which connect the side angles.

Ferrure avec cadre métallique pour lits doubles, avec tête à **trois positions** individuelles d/g, convient à l'utilisation des cadres à lattes à visser aux cornières latérales.

Schwenkfußbeschläge für Klappbetten Foot mechanisms for cupboard beds Pieds pour armoires-lits

324...

Gew.
2,5 kg

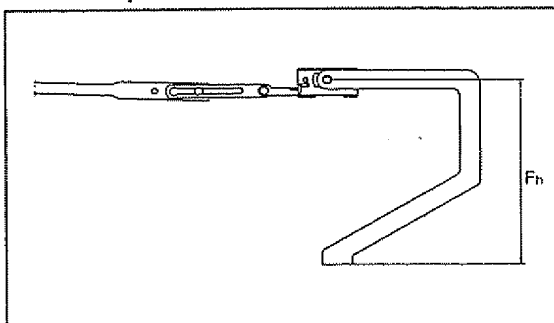


Automatischer Schwenkfuß, eckige Form.
- Fh 250, 280 und/and/et 295mm -

Automatic foot, angular model.

Pied automatique pivotant, forme angulaire.

21205

Gew.
1,5 kg

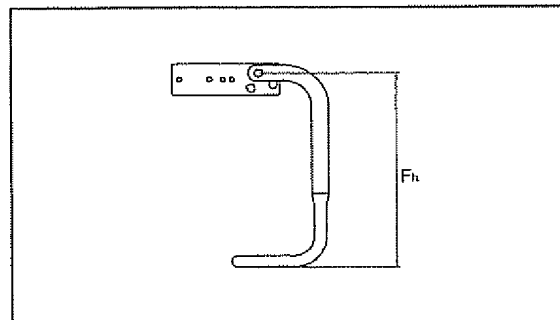


Manueller einteilig gebogener Rohrbügelfuß.
- Fh 250, 270 und/and/et 310mm -

Manually operated steel tube foot in one piece.

Pied manuel mono-tubulaire basculant à la main, une seul pièce.

325...

Gew.
2,0 kg

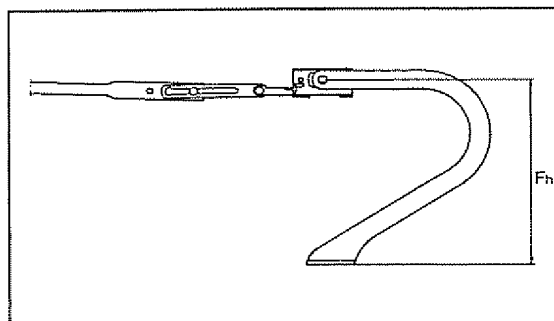


Automatischer Schwenkfuß, runde Form.
- Fh 250, 280 und/and/et 295mm -

Automatic foot, round model.

Pied automatique, forme arrondie.

31100

Gew.
1,5 kg

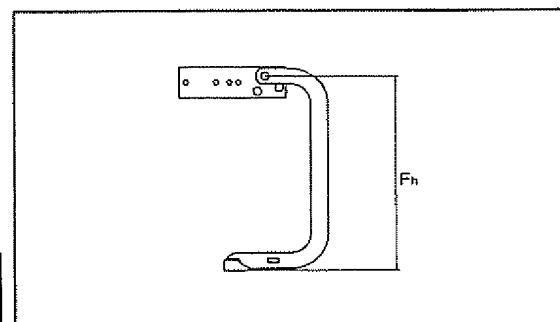


Manueller Schwenkfuß mit loser Verbindungs-
stange. - Fh 250, 270 und/and/et 310mm -

Manually operated foot with separate connecting bar.

*Pied manuel basculant à la main avec barre de syn-
chronisation séparée.*

320...

Gew.
2,0 kg

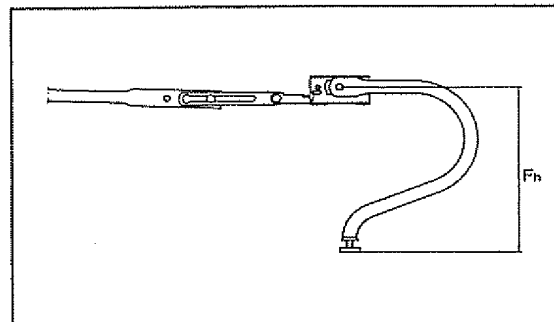


Automatischer Schwenkfuß, Rohrbügelform.
- Fh 250+15, 280+15 und/and/et 295+15 mm -

Automatic foot, steel tube model.

Pied automatique, cintre mono-tubulaire.

31150

Gew.
1,5 kg

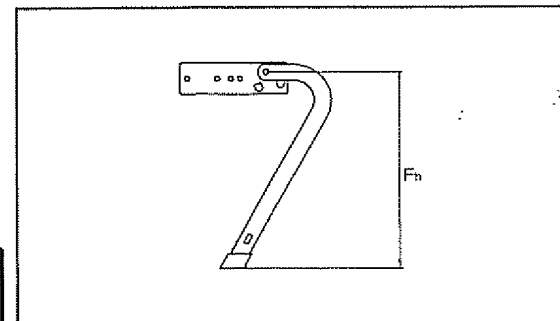

Manueller Schwenkfuß mit loser Verbindungs-
stange. - Fh 270 und/and/et 310mm -


Manually operated foot with separate connecting bar.

*Pied manuel basculant à la main avec barre de syn-
chronisation séparée.*

Wandbefestigungssystem Wall fixing system Système pour fixation au mur

32200

Gew.
0,2 kg

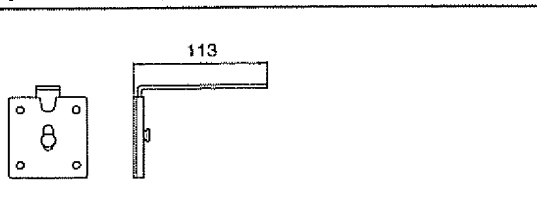


Standard Befestigungswinkel nach EN 1129-1.

Standard fixing angle conforming to EN 1129-1.

Angle standard conformément à EN 1129-1.

32203

Gew.
0,2 kg

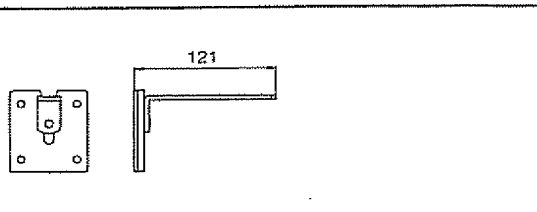


Zusätzlich mit drehbarem Winkel.

Additional with turnable angle.

Angle tournant supplémentaire.

32204


Gew.
0,25 kg

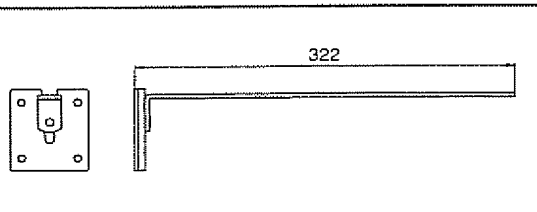

Zusätzlich mit drehbarem und verlängertem Winkel für wand-freistehende Klappbetten.

Additional with turnable and lengthened angle for cup-boards not posed at the wall.

Angle tournant et plus long, pour les armoires-lits non situées au mur.

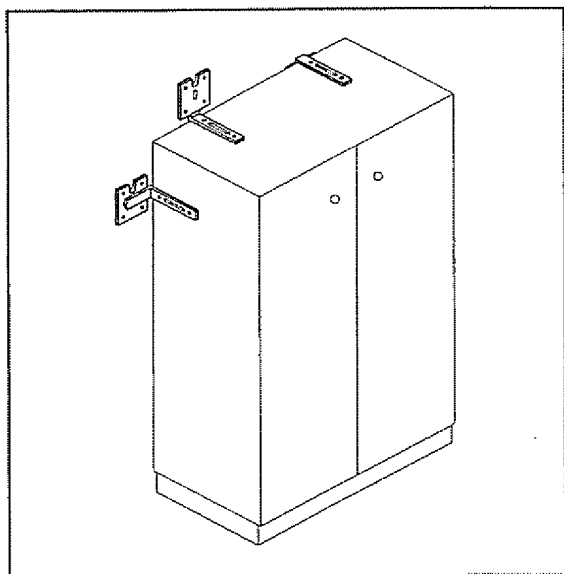

Vorschlag einer Montageanleitung

Dieser Schrank ist vor dem Öffnen unbedingt an der Stellwand zu **verankern**, da sonst **Unfallgefahr** besteht.

1. Dieses Klappbett muß am Schrankoberboden mit einer Haltekraft von **mind. 800N**, je Befestigungsstelle **400N**, kippgesichert werden.
2. Das Aufstellen und Befestigen dieses Klappbettes darf nur durch **geschulte** und hierfür **geeignete Fachkräfte** durchgeführt werden.
3. Vor Aufstellen muß geprüft werden, ob die mitgelieferten Befestigungsmittel für die Stellwand geeignet sind.
4. Die zwei Befestigungswinkel, sind mit jeweils mindestens zwei Schrauben und Wanddübel in Schrankhöhe zu montieren (Teile im Lieferumfang). Dann das Klappbett unter die Winkel schieben und mit dem Schrankoberboden mittels der vorgesehenen Schrauben verbinden.

Vorschlag einer Gebrauchsanleitung für ein Hochklappbett Beschlagssystem 329...

1. Die eingebauten Beschläge sind wartungsfrei. Sollte nach Jahren ein Knarrgeräusch auftreten, können die Lagerschalen am Verbindungsrohr unter dem Matratzenrahmen mit einem Spachtel von hinten nachgefettet und die Gelenkstellen der Federpakete mit einem Maschinenöl nachgeschmiert werden.
2. Die Beschläge sind für Matratzengewichte von **5-25 kg** geeignet. Die für das Matratzengewicht notwendige Federspannung reguliert man mit der Gewindestange am Federkamm.
3. Zur Vermeidung von **Quetschungen** immer die Türfrontgriffe zum Schließen des Klappbettes verwenden.
4. Das ausschließliche Belasten des Kopfendes, z.B. durch sich daraufstellen, ist zu vermeiden, da die **Gefahr** des selbsttätigen Schließens des Klappbettes besteht.

Proposals for instructions for use and installation instruction are translated on request.
Propositions pour instruction de montage et pour mode d'emploi, traduction sur demande.

Doppelbettcouches, Ottomanen, Klappcouches Double bed-settees, Ottomans, Bed-settees Canapés-lits, Récamières, Divans-lits

Doppelbettcouchbeschläge

Seite 35-53

Mechanisms for double bed-settees

page 35-53

Mécanismes pour canapés-lits

page 35-53

Ottomanenbeschläge

Seite 54-55

Mechanisms for ottomans

page 54-55

Mécanismes pour récamières

page 54-55

Klappcouchbeschläge




Seite 56-57

Mechanisms for bed-settees

page 56-57

Mécanismes pour divans-lits

page 56-57

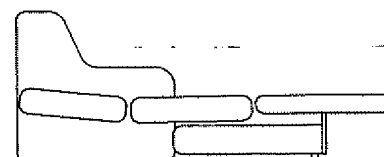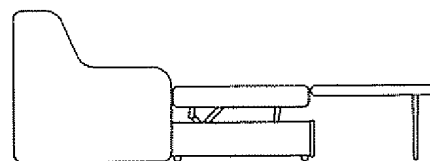

Bitte beachten Sie

Die meisten Produkte sind **patentrechtlich** geschützt.
Änderungen, die dem technischen **Fortschritt** oder der
Sicherheit dienen, behalten wir uns vor.

Please note

Most of the products are protected by **patent**.
We reserve the right to alterations to the mechanisms in
the interest of **safety** and technical **progress**.


Remarques

La plupart de nos produits sont **brevetés**.
Sous réserve de toutes modifications allant dans le sens
du **progrès** technique et d'une plus grande **sécurité**.

Doppelbettcouchbeschläge

Mechanisms for double bed-settees

Mécanismes pour canapés-lits

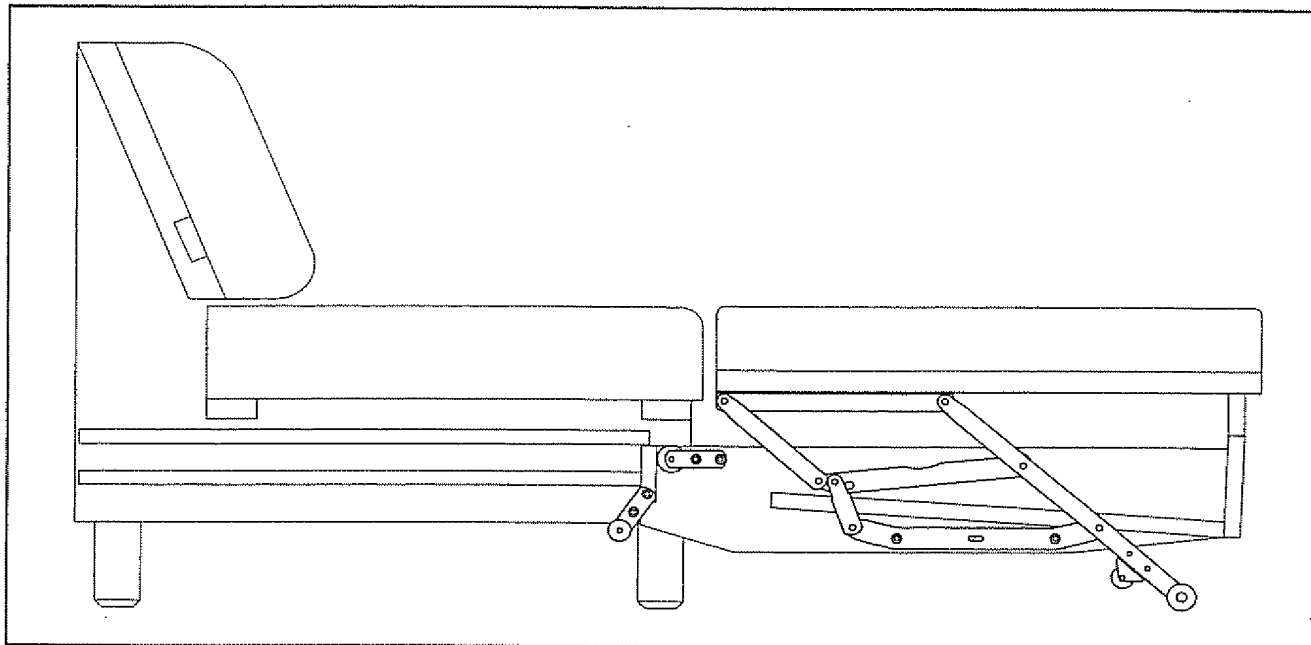

- | | | |
|---|---|--|
| • Beschläge für bodentfreie und für wand-freie Modelle. | • Mechanisms for high-leg and for wall-away models. | • Ferrures pour modèles sur pieds et dos au mur. |
| • Beschläge für Längs- und Querschläfermodelle. | • Mechanisms for transversal and lengthways models. | • Ferrures pour modèles à couchage longitudinale et transversale. |
| • Beschläge geeignet für Modelle mit ca. 200cm Liegelänge. | • Mechanisms suited for models with about 200cm sleeping length. | • Ferrures pour modèles de longueur de couchage jusqu'à 200cm. |
| • Beschläge für Modelle mit Sitzhöhe gleich Liegehöhe. | • Mechanisms for models with height of seat identical to height of sleep. | • Ferrures pour modèles avec hauteur d'assise identique à hauteur de couchage. |
| • Beschläge zur Verwendung mit losen Polsterteilen und für festgepolsterte Modelle. | • Mechanisms for use with separate cushions and for models with fixed upholstery. | • Ferrures pour modèles à garnissage fixe ou détaché. |
| • Beschläge für Modelle mit Bettkasten. | • Mechanisms for models with storage areas. | • Ferrures pour modèles avec coffre. |
| • Beschlagsoberflächen in einbrenn- oder tauchlackiert. | • Surface in lacquered finish. | • Surfaces des ferrures laquées au four ou par immersion. |
| • Beschlagsbemusterung komplett eingebaut im Kundenmodell möglich. | • Samples can be delivered mounted in customers' models. | • Possibilité d'échantillonnage monté sur modèle client. |
| • CAD-Einbauzeichnungen. | • CAD-mounting drawings are available. | • Plans de montage CAD disponibles. |




Neuheiten seit der interzum 2001.
New developments since interzum 2001.
Nouveautés depuis interzum 2001.

Gew.
ca. kg

Beschlagsgewicht inklusive Kleinteile.
Weight of mechanism including accessories.
Poids de la ferrure, accessoires compris.

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

84510

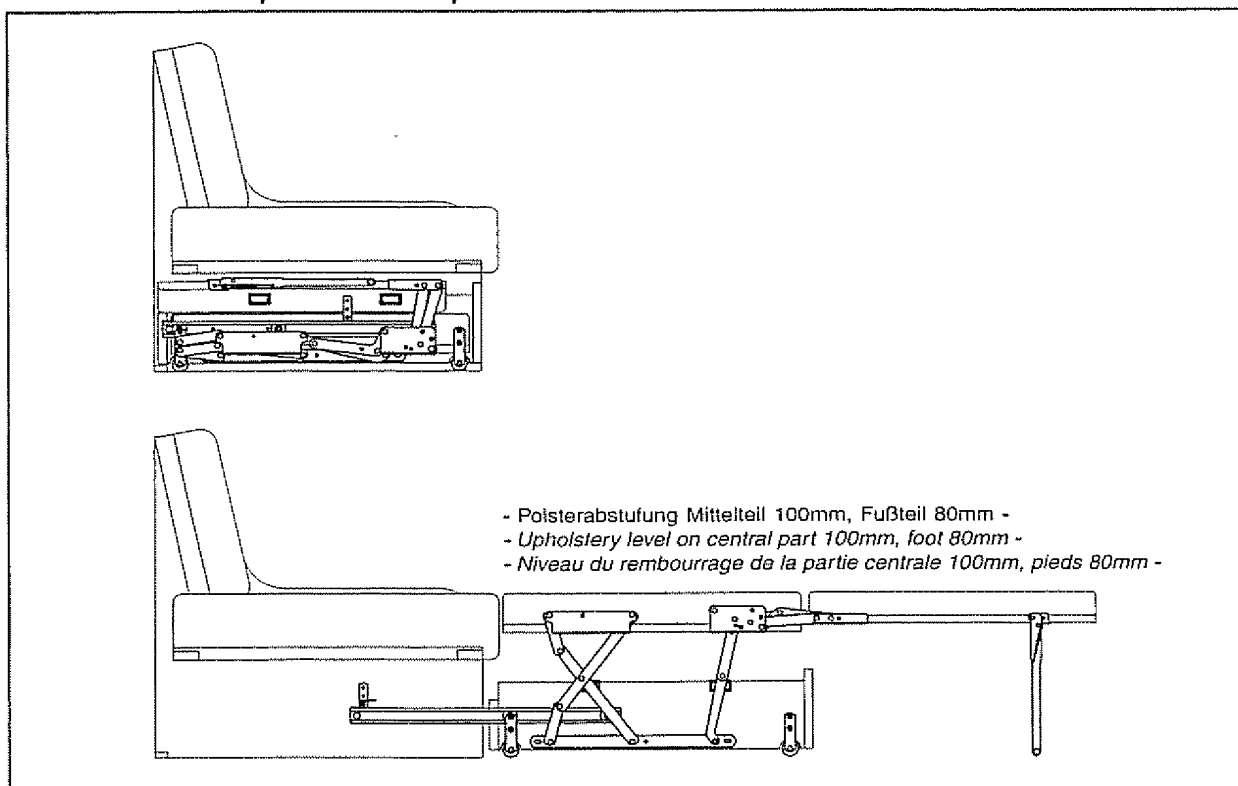


Gew.
8,6 kg

Feststehendes Sitz- und Rückenpolster, Fuß- und Mittelteilverwandlung ohne umgreifen "Einhandbedienung", Mechanik im Auszugswagen, Fußteilabstützung über ausklappbaren Stützbügel. - Liegelänge ca. 200cm -

With fixed upholstery of seat and back, foot and central part convertible "by one-hand operation", extensible storage box, movable support of foot section. - sleeping length approx 200cm -


Assise et dos fixes, pieds et partie centrale convertibles en "un tour de main", chariot mécanique, support-pieds escamotable. - longueur de couchage env. 200cm -

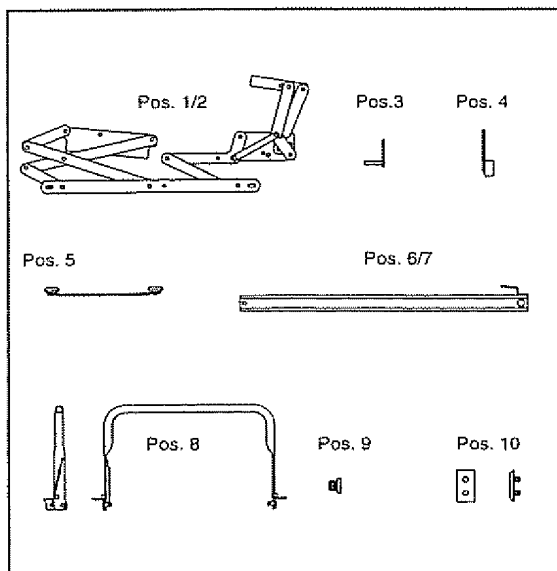

- Pos.1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos.3 Lasche komplett
Fish-plate <> Levier
- Pos.4 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos.5 Hebel komplett mit Rolle
Glider with castors <> Levier avec roulette
- Pos.6/7 C-Schiene komplett links/rechts
Glider l/r <> Glissière g/d
- Pos.8 Fußbügel komplett
Foot <> Pied
- Pos.9 Kunststoffkappe
Plastic cap <> Couvercle plastique
- Pos.10 Kunststoffkappe
Plastic cap <> Couvercle plastique

Doppelbettcouchbeschlge Sitzhhe gleich Liegehhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mcanismes pour canaps-lits Hauteur d'assise identique  hauteur de couchage

84500

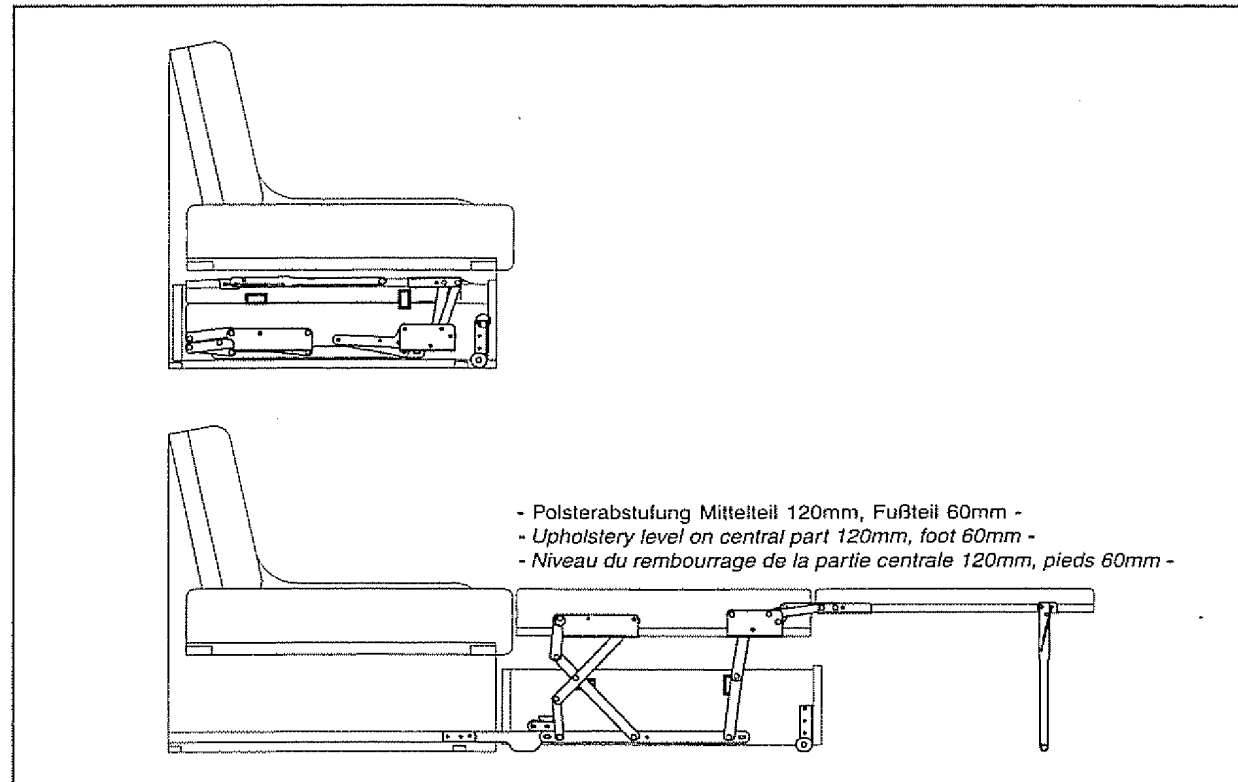


Gew.
7,7 kg

Feststehendes Sitz- und Rckenpolster, Fu- und Mittelteilverwandlung ohne umgreifen "Einhandbedienung", Mechanik im Auszugswagen, Futeilabsttzung ber ausklappbaren Sttzbgel. - Liegelnge ca. 200cm -

With fixed upholstery of seat and back, foot and central part convertible "by one-hand operation", extensible storage box, movable support of foot section. - sleeping length approx 200cm -

Assise et dos fixes, pieds et partie centrale convertibles en "un tour de main", chariot mcanique, support-pieds escamotable. - longueur de couchage env. 200cm -

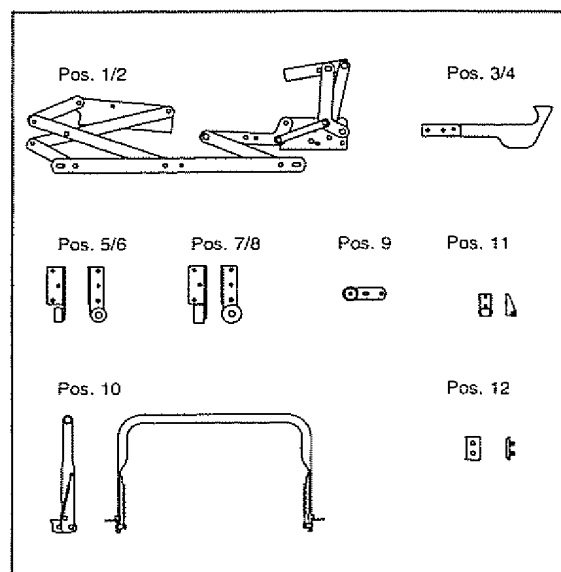


- Pos.1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r  Ferrure de leve g/d
- Pos.3/4 Fnger komplett links/rechts
Catch l/r  Crochet de retenue g/d
- Pos.5/6 Winkel komplett mit Rolle links/rechts
Angle with castors l/r  Angle avec roulettes g/d
- Pos.7/8 Winkel komplett mit Rolle links/rechts
Angle with castors l/r  Angle avec roulettes g/d
- Pos.9 Rolle komplett
Castor  Roulette
- Pos.10 Fubgel komplett
Foot  Pied
- Pos.11 Rolle komplett
Castor  Roulette
- Pos.12 Kunststoffkappe
Plastic cap  Couvercle plastique

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

85101


Gew.
6,3 kg

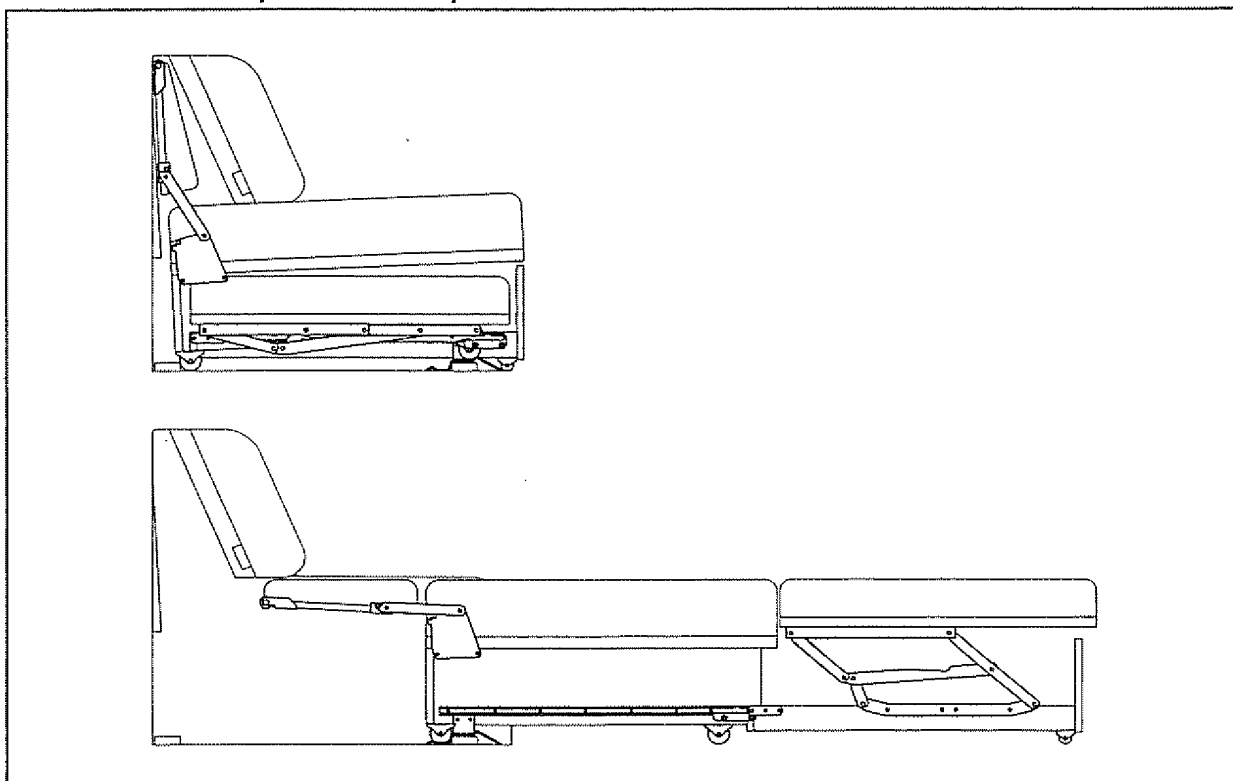

Kopfteil schwenkt hinter feststehendes Rückenpolster, Fußteil mit Schwenkmechanik, mit Sitzgefälle und Relaxposition, ohne Fußteilbeschlag als Querschläfer einsetzbar. - Liegelänge ca. 200cm -

Head pivots behind fixed back upholstery, foot with pivot mechanism, with inclined seat and relax position, without foot mechanism usable as transverse bed. - sleeping length approx 200cm -

Tête pivote derrière le dossier fixe, pieds à ferrure pivotante, avec assise inclinée et position relax, utilisable sans ferrure pieds pour couchage transversal. - longueur de couchage env. 200cm -

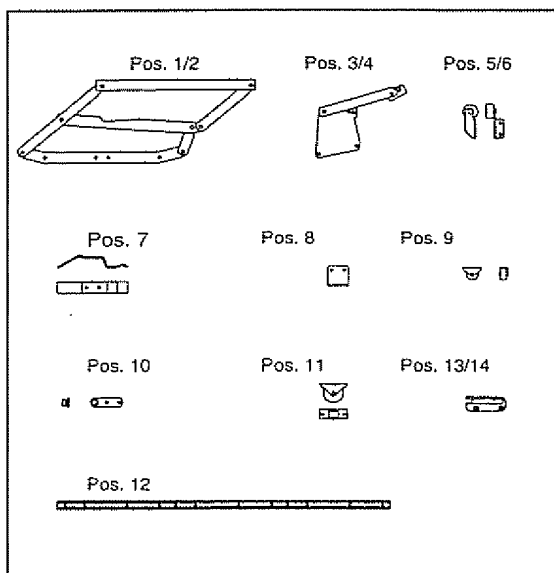


- Pos.1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos.3/4 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.5/6 Winkel komplett mit Rolle links/rechts
Angle with castor l/r <> Angle avec roulette g/d
- Pos.7 Auflauframpe
Leading angle <> Angle d'arrêt
- Pos.8 Winkel
Angle <> Angle
- Pos.9 Rolle komplett
Castor <> Roulette
- Pos.10 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos.11 Rolle komplett
Castor <> Roulette
- Pos.12 C-Schiene
Glider <> Glissière
- Pos.13/14 Kunststollikappe links/rechts
Plastic cap l/r <> Couvercle plastique g/d

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

85700


Gew.
7,3 kg

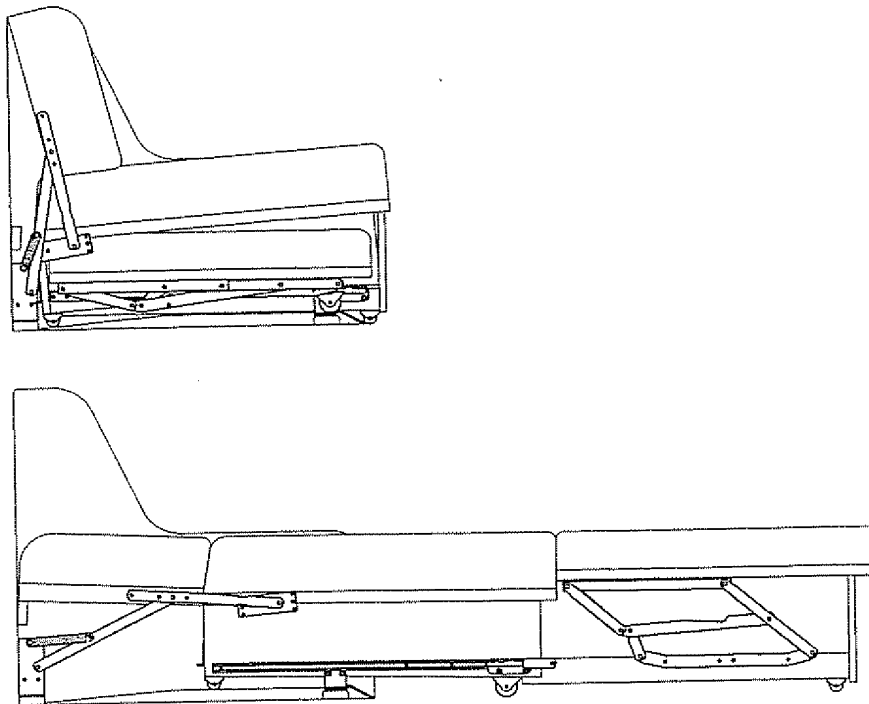

Hochschwenkendes Kopf-/Rückenteil, Fußteil mit Schwenkmechanik, mit Sitzgefälle und Relaxposition, ohne Fußteilbeschlag als Querschläfer einsetzbar. - Liegelänge ca. 200cm -

Upward pivoting head and back, foot with pivot mechanism, with inclined seat and relax position, without foot mechanism usable as transverse bed. - sleeping length approx 200cm -


Tête/dossier pivotants, pieds par ferrure pivotante, avec assise inclinée et position relax, utilisable sans ferrure pieds pour couchage transversal. - longueur de couchage env. 200cm -

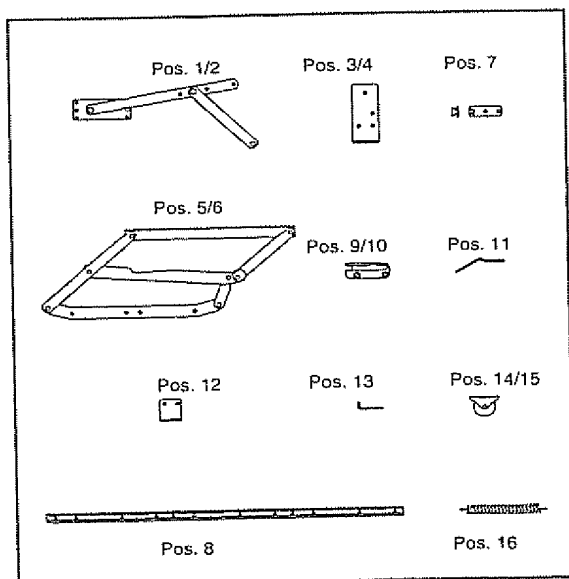

- Pos.1/2 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.3/4 Winkel komplett links/rechts
Angle l/r <> Angle g/d
- Pos.5/6 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos.7 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos.8 C-Schiene
Glider <> Glissière
- Pos.9/10 Kunststoffkappe links/rechts
Plastic cap l/r <> Couvercle plastique g/d
- Pos.11 Auflauframpe
Leading angle <> Angles d'arrêt
- Pos.12 Winkel
Angle <> Angle
- Pos.13 Winkel
Angle <> Angle
- Pos.14/15 Rolle komplett
Castor <> Roulette
- Pos.16 Zugfeder
Tension spring <> Ressort de traction

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

80028

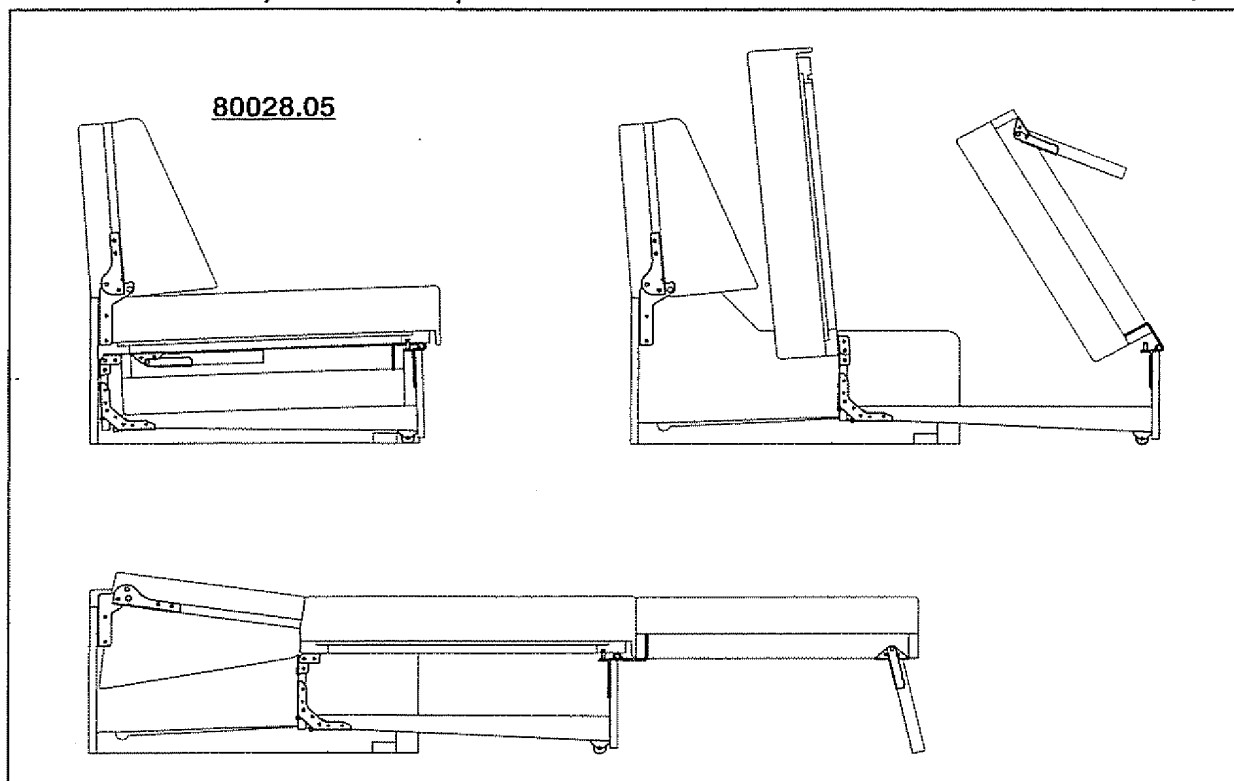


Gew.
3,0 kg

Sitz- und Fußteil mit Klappmechanik ohne Polsterversprung, mit Sitzgefälle und Relaxposition.
 - 80028.00 ohne Kopfteil - - 80028.05 mit umklappbarem Kopfteil -

Seat and foot section with folding mechanism and identical upholstery width, with inclined seat and relax position.
 - 80028.00 without head rest - - 80028.05 with folding head rest -

Assise et pieds à ferrure pliante, largeur de coussins identique, avec assise inclinée et position relax.
 - 80028.00 sans tête - - 80028.05 avec tête pliante -

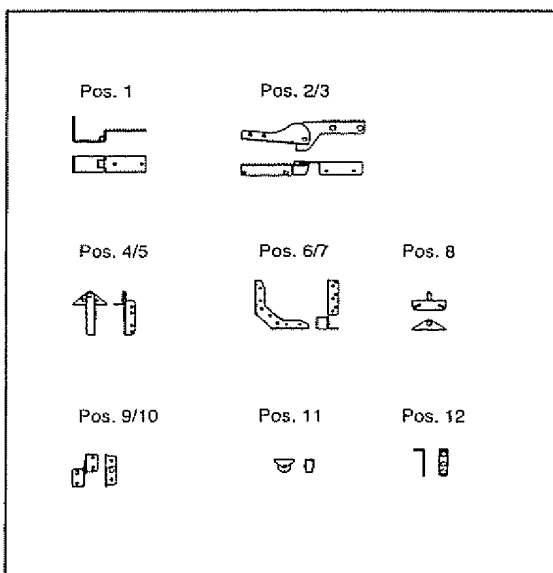


- Pos.1 Scharnier komplett
Hinge <> Charnière
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4/5 Gelenk komplett links/rechts
Mechanism l/r <> Ferrure g/d
- Pos.6/7 Winkel komplett mit Rolle links/rechts
Angle with castor l/r <> Angle avec roulette g/d
- Pos.8 Winkel komplett
Angle <> Angle
- Pos.9/10 Scharnier komplett links/rechts
Hinge l/r <> Charnière g/d
- Pos.11 Rolle komplett
Castor <> Roulette
- Pos.12 Winkel
Angle <> Angle

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

80029

NEU


Gew.
2,0 kg

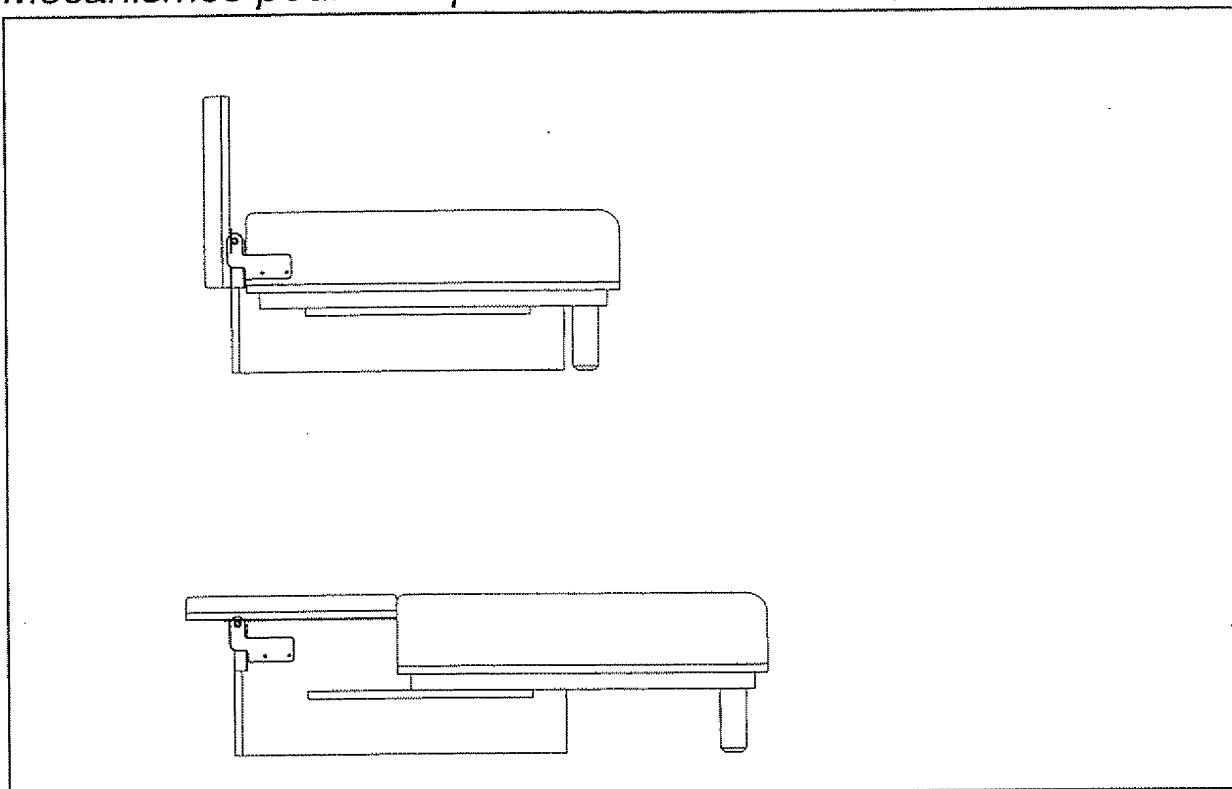

Einfacher Beschlag zum 90° Klappen von Rückenteilen.

Simple mechanism for folding back section by 90 °.


Mécanisme simple pour rabattre des dossiers à un angle de 90 °.

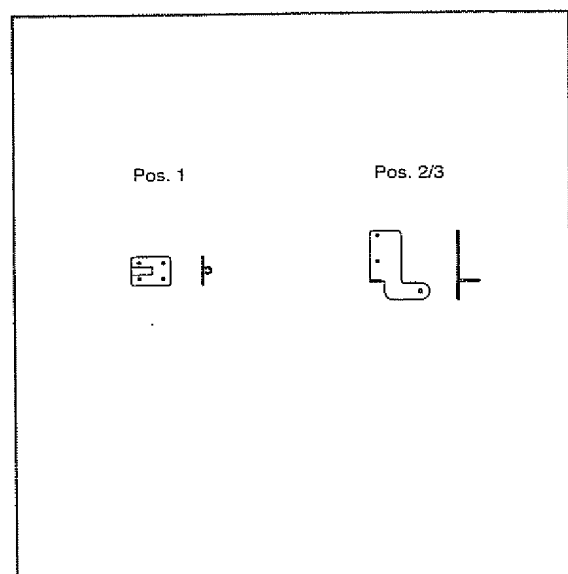

- Pos.1 Platte komplett
 Plate <-> Plaque de fixation
- Pos.2/3 Platte links/rechts
 Plate 1/2 <-> Plaque de fixation g/d

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

85503

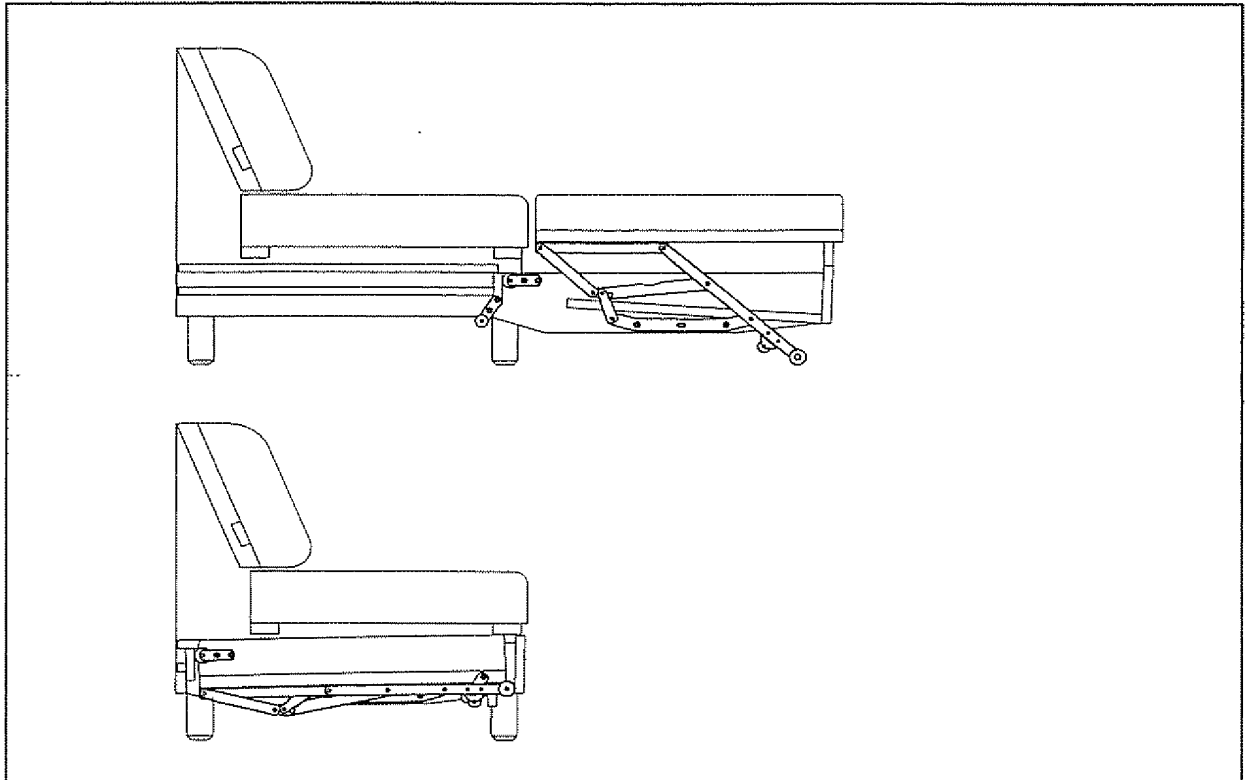


Gew.
3,3 kg

Feststehendes Sitz- und Rückenpolster, Fußteil mit Schwenkmechanik im Auszugswagen, geeignet für **bodenfreie** Querschläfer mit Relaxposition.

With fixed upholstery of seat and back, foot with pivot mechanism in extensible storage box, suited for **high-leg** transverse beds with relax position.

Assise et dos fixes, pieds avec ferrure pivotante montée dans le chariot, adaptée pour modèles à couchage transversal **sur pieds** avec position de relaxation.

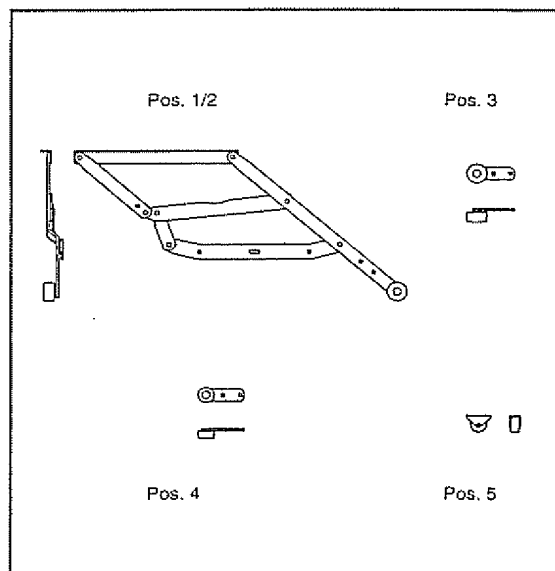


- Pos.1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos.3 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos.4 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos.5 Rolle komplett
Castor <> Roulette

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe

Mechanisms for double bed-settees Height of seat identic to height of sleep

Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

85130

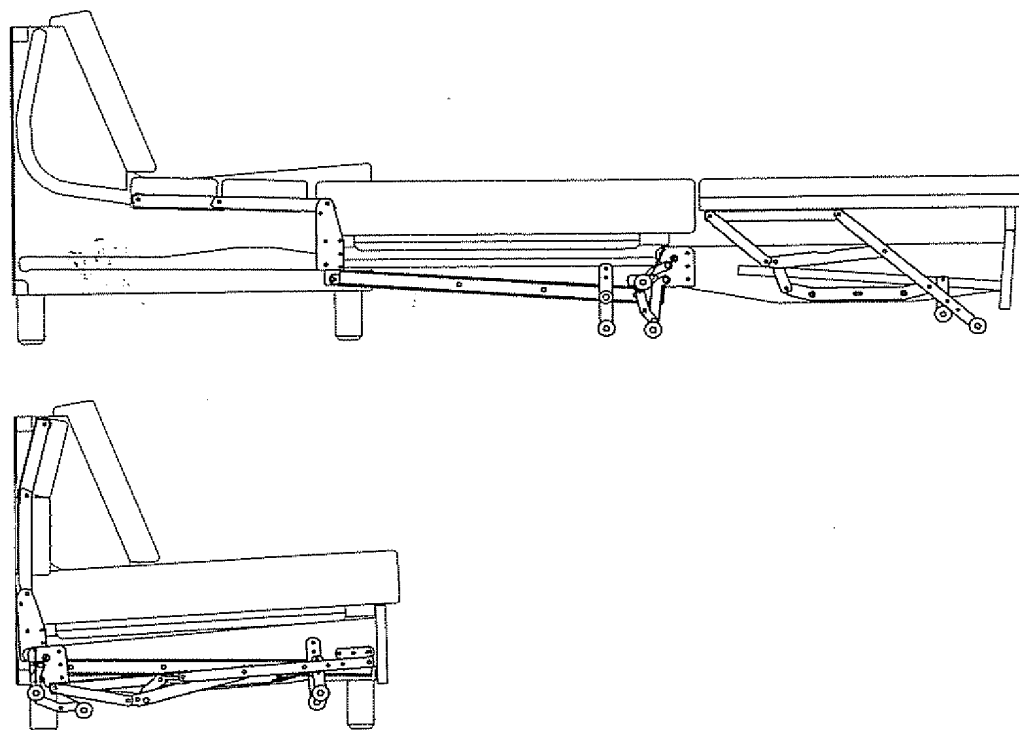


Gew.
5,2 kg

Kopfteil schwenkt hinter feststehendes Rückenpolster, Fußteil mit Schwenkmechanik im Auszugswagen, geeignet für **bodenfreie Längsschläfer mit Relaxposition.** - Liegelänge ca. 200cm -

Head pivots behind fixed back upholstery, foot with pivot mechanism in extensible storage box, suited for **high-leg lenghtways beds with relax position.** - sleeping length approx 200cm -

Tête pivote derrière le dossier fixe, pieds avec ferrure pivotante montée dans le chariot, adaptée pour modèles à couchage longitudinal **sur pieds avec position de relaxation.** - longueur de couchage env. 200cm -

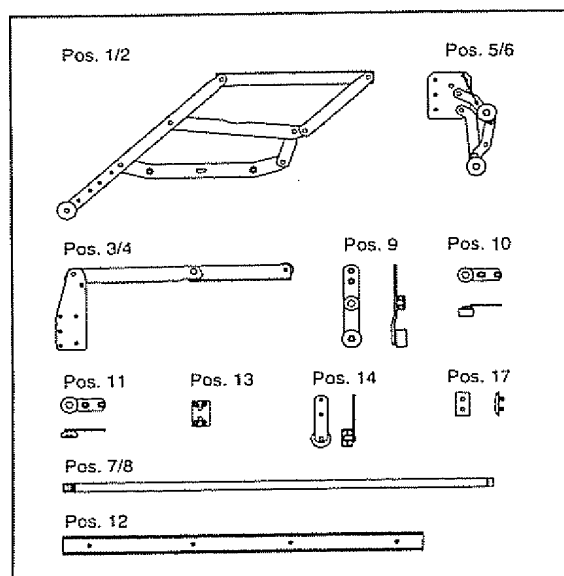


- Pos. 1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos. 3/4 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos. 5/6 Automatischer Fuß komplett links/rechts
Automatic foot l/r <> Pied automatique g/d
- Pos. 7/8 Traverse
Cross bar <> Traverse
- Pos. 9 Lasche komplett mit Rollen
Fish-plate with castor <> Levier avec roulette
- Pos. 10 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos. 11 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos. 12 C-Schiene
Glider <> Glissière
- Pos. 13 Winkel
Angle <> Angle
- Pos. 14 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos. 17 Kunststoffkappe
Plastic cap <> Couvercle plastique

Doppelbettcouchbeschlge Sitzhhe gleich Liegehhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mcanismes pour canaps-lits Hauteur d'assise identique  hauteur de couchage

85509

NEU


Gew.
6,6 kg

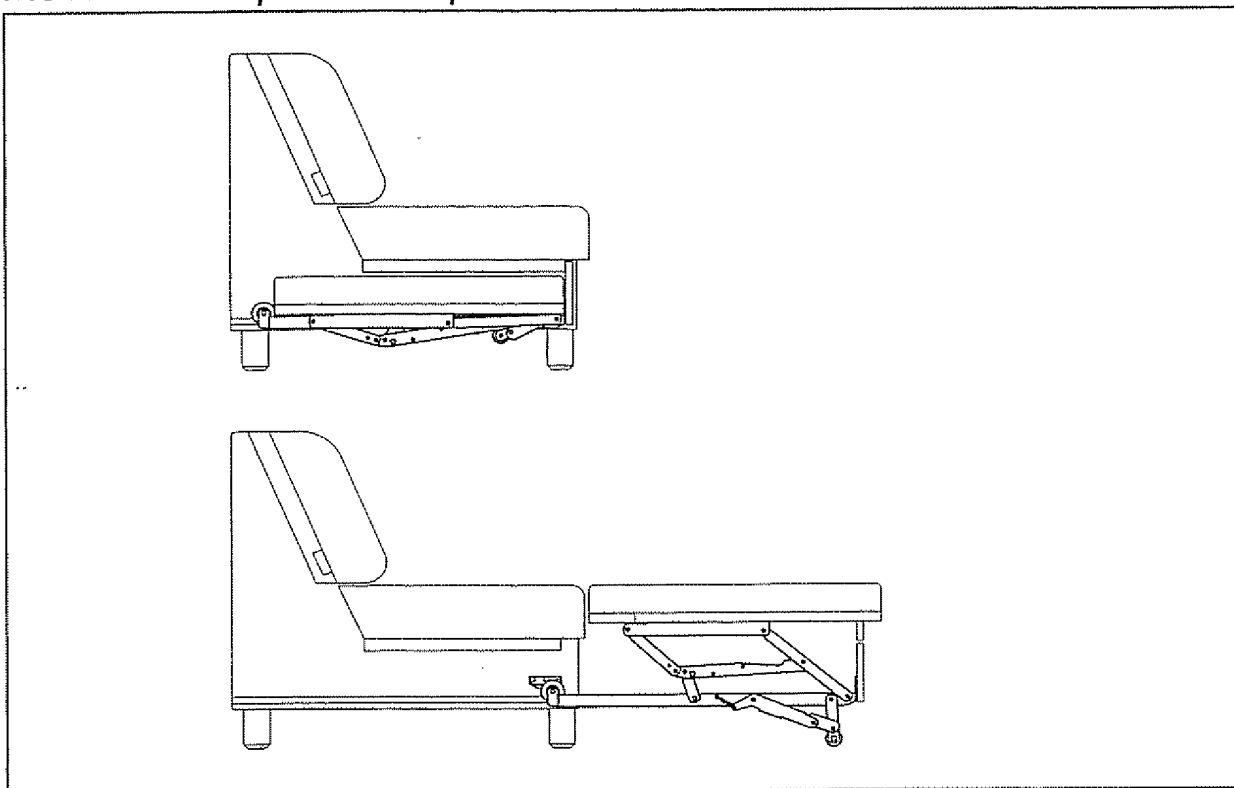

Feststehendes Sitz- und Rckenpolster, Futeil mit Schwenkmechanik im Auszugswagen, geeignet fr bodenfreie Querschlfer mit Relaxposition.

With fixed upholstery of seat and back, foot with pivot mechanism in extensible storage box, suited for **high-leg** transverse beds with relax position.


Assise et dos fixes, pieds avec ferrure pivotante monte dans le chariot, adapte pour modles  couchage transversal **sur pieds** avec position de relaxation.

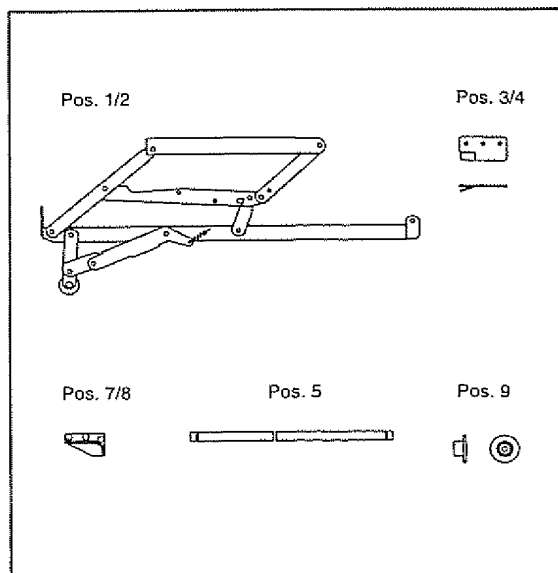

- Pos.1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de leve g/d
- Pos.3/4 Platte links/rechts
Plate l/r <> Plaque de fixation g/d
- Pos.5 Traverse
Cross bar <> Traverse
- Pos.7/8 Kunststofflnger links/rechts
Plastic catch l/r <> Couvercle plastique g/d
- Pos.9 Kunststoffrolle
Plastic castor <> Roulette plastique

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

85530

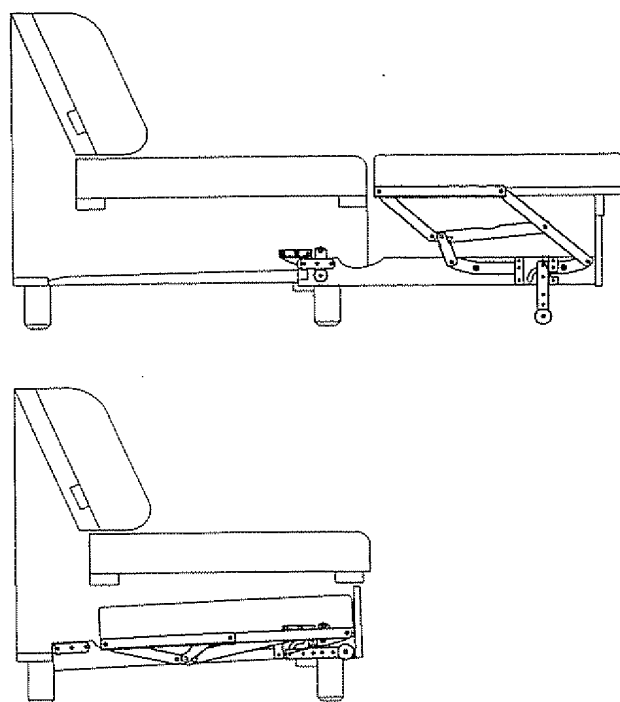


Gew.
3,3 kg

Feststehendes Sitz- und Rückenpolster, Fußteil mit Schwenkmechanik im Auszugswagen, geeignet für **bodenfreie** Querschläfer mit Relaxposition.

*With fixed upholstery of seat and back, foot with pivot mechanism in extensible storage box, suited for **high-leg** transverse beds with relax position.*


*Assise et dos fixes, pieds avec ferrure pivotante montée dans le chariot, adaptée pour modèles à couchage transversal **sur pieds** avec position de relaxation.*

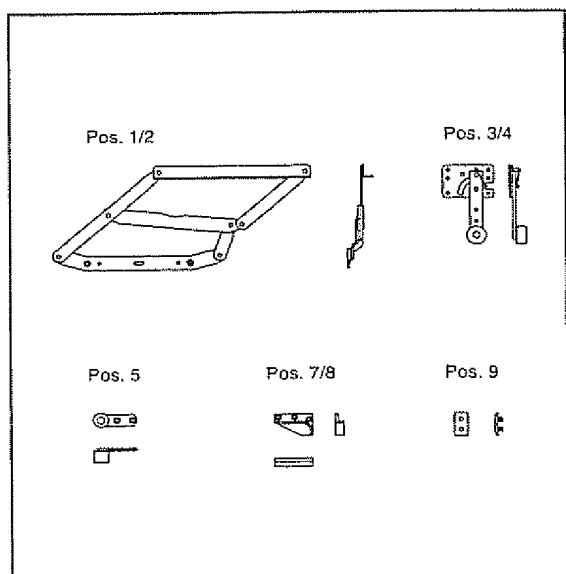

- Pos.1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos.3/4 Automatischer Fuß komplett links/rechts
Automatic foot l/r <> Pied automatique g/d
- Pos.5 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos.7/8 Kunststoffhänger links/rechts
Plastic catch l/r <> Couvercle plastique g/d
- Pos.9 Kunststoffkappe
Plastic cap <> Couvercle plastique

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

13011

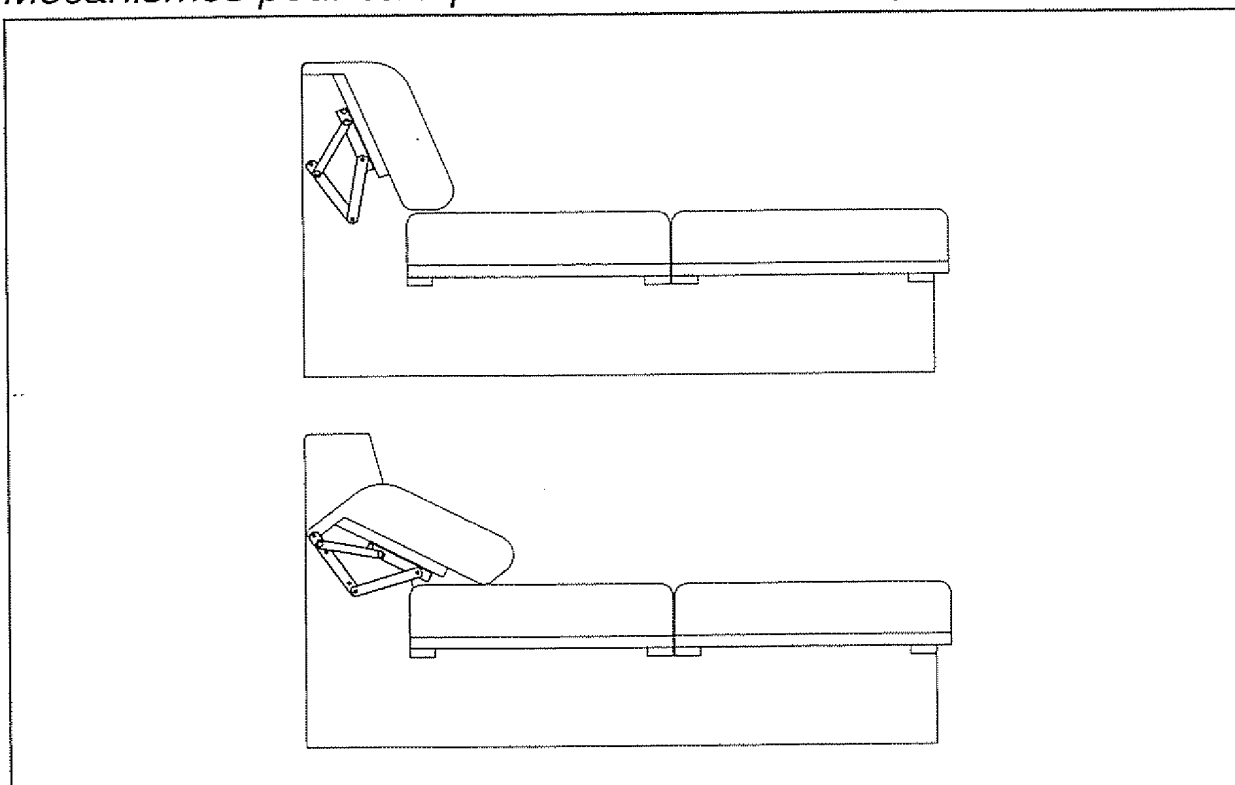


Gew.
1,1 kg

Kopfteilverstellung mit reibscheibenvernieteter Schwenkmechanik.

Head mechanism with brake washer.

Réglage de la tête par mécanisme pivotant à friction.

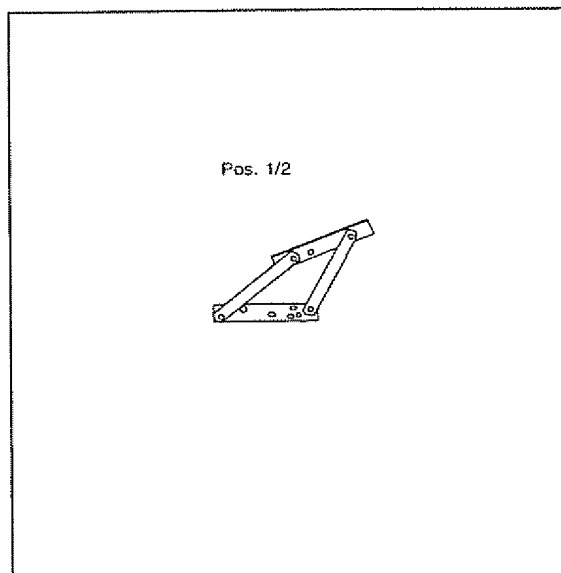


Pos. 1/2

Schwenkbeschlag komplett links/rechts
 Pivot mechanism $\forall r \leftrightarrow$ Mécanisme pivotant g/d

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

85613

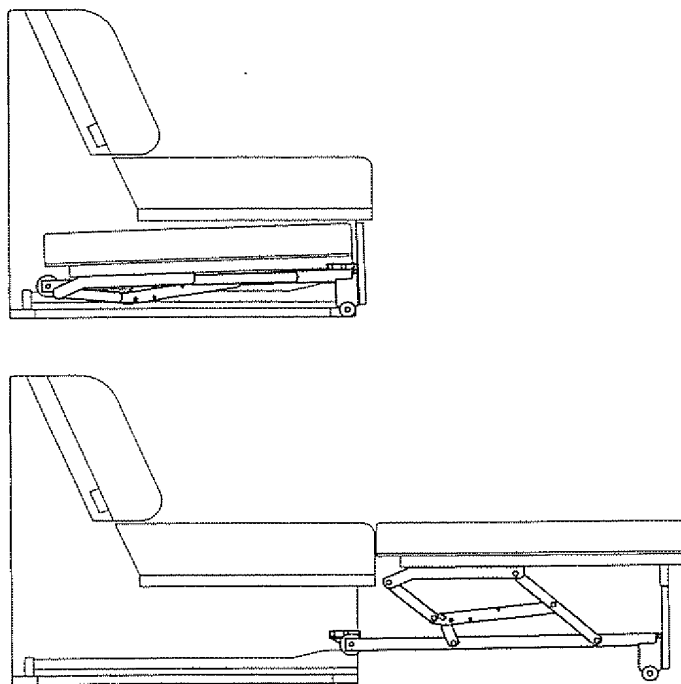


Gew.
7,5 kg

Sitzverstellung mit Schwenkmechanik im Fußteil, Auszugswagen in kompletter Stahlkonstruktion, geeignet als Querschläfer mit Relaxposition.

Adjustable seat with pivot mechanism in the foot section, pull-out section completely in steel, suited as transverse bed with relax position.

Réglage de l'assise avec pieds pivotants, chariot en structure d'acier, convient au couchage transversal avec position relax.

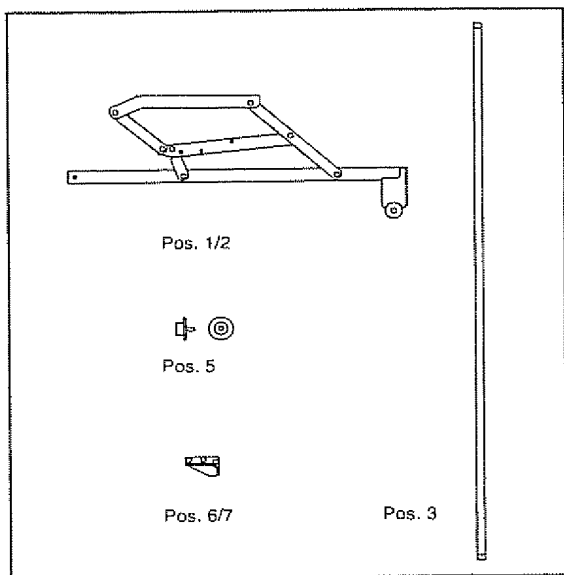


- Pos. 1/2 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos. 3 Traverse
Cross bar <> Traverse
- Pos. 5 Kunststoffrolle komplett
Plastic castor <> Roulette plastique
- Pos. 6/7 Kunststofflänger links/rechts
Plastic catch l/r <> Couverture plastique g/d

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

12900


Gew.
5,9 kg

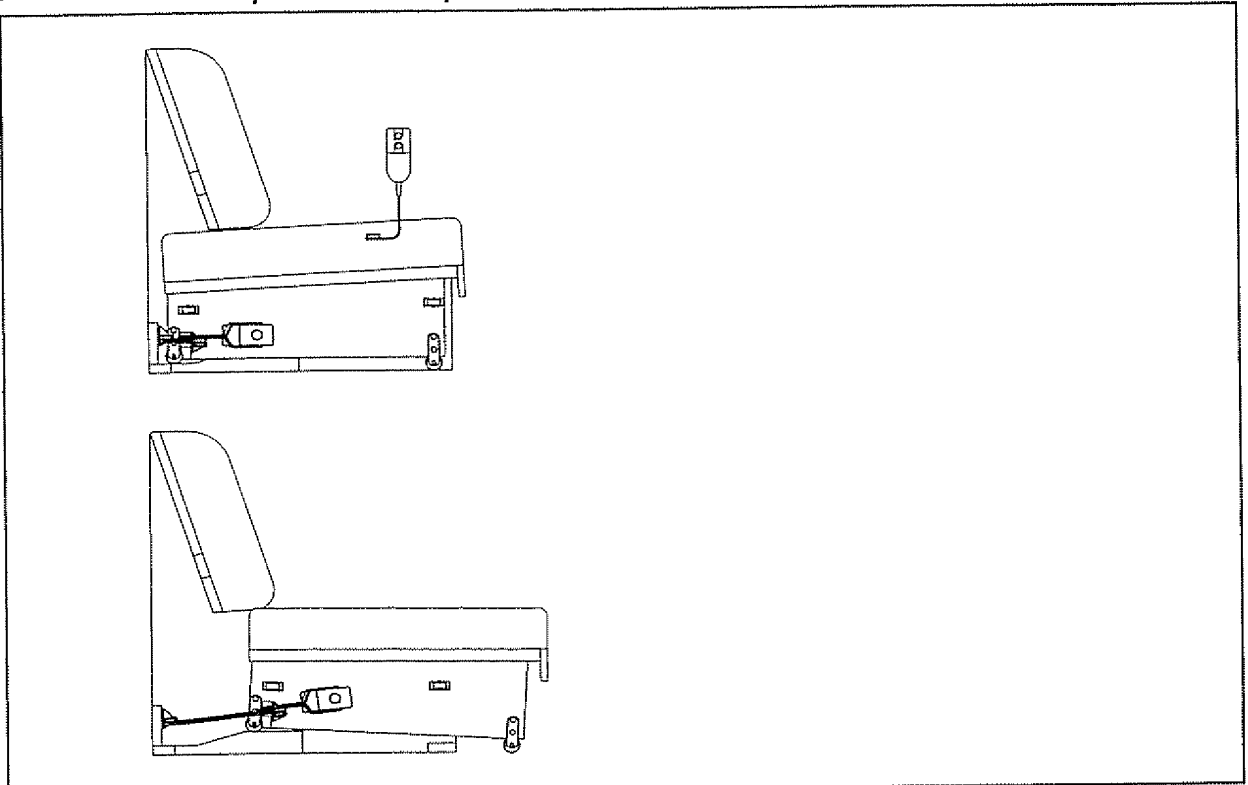

Motorische Sitzteilverstellung mit hinterer Anhebung des Sitzes zum Sitzgefälleausgleich, mit Sitzgefälle und Bett-
 kasten, **1-motorig**.
 - Liegebreitenvergrößerung um ca. 25cm -

Motorised adjustable seat with inclined seat and access to storage box, lifting of back part of seat for compensa-
 tion of inclined seat, **1 motor**.
 - increase of sleeping width by about 25cm -


Réglage motorisé de l'assise avec montée arrière pour compensation de l'assise, avec inclinaison de l'assise et
 coffre, **1 moteur**.
 - augmentation de la largeur de couchage de 25cm -

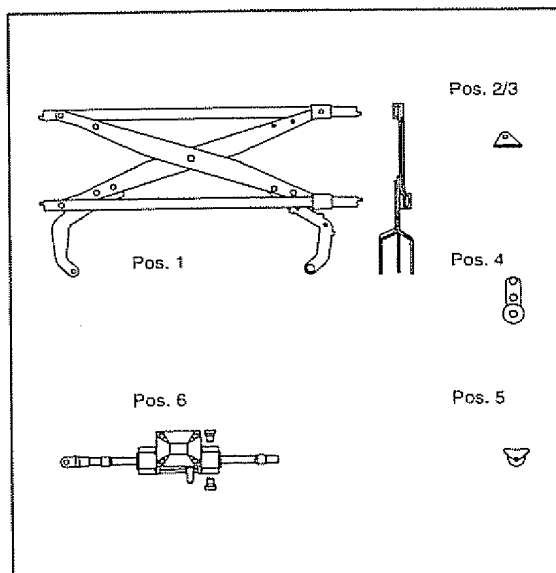


- Pos.1 Hubschere komplett
Scissor mechanism <> Ciseaux de relevage
- Pos.2/3 Winkel links/rechts
Angle l/r <> Angle g/d
- Pos.4 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos.5 Rolle komplett
Castor <> Roulette
- Pos.6 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Doppelbettcouchbeschläge Sitzhöhe gleich Liegehöhe
Mechanisms for double bed-settees Height of seat identic to height of sleep
Mécanismes pour canapés-lits Hauteur d'assise identique à hauteur de couchage

80270



- 80271.00 mit Blendenvorschub -
- 80271.03 mit Kastenvorschub -

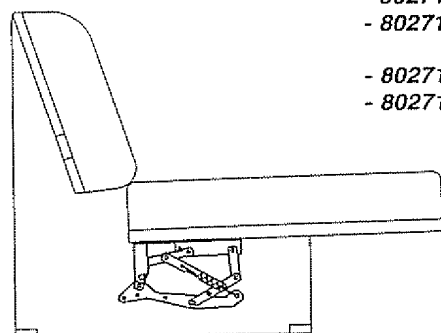


- 80271.00 with forward travel of foot board -
- 80271.03 with forward travel of storage box -
- 80271.00 réglage de l'assise avec avance panneau frontal -
- 80271.03 réglage de l'assise avec avance coffre -

Gew.
2,7 kg

Sitzteilverstellung mit hinterer Anhebung des Sitzes zum Sitzgefälleausgleich, mit Sitzgefälle und Bettkassen.
 - Liegebreitenvergrößerung um ca. 25cm -

Adjustable seat with lifting of back part of seat for compensation of seat, with inclined seat and access to storage
 - increase of sleeping width by about 25cm -

Réglage de l'assise avec montée arrière pour compensation de l'assise, avec inclinaison de l'assise et coffre.
 - augmentation de la largeur de couchage de 25cm -

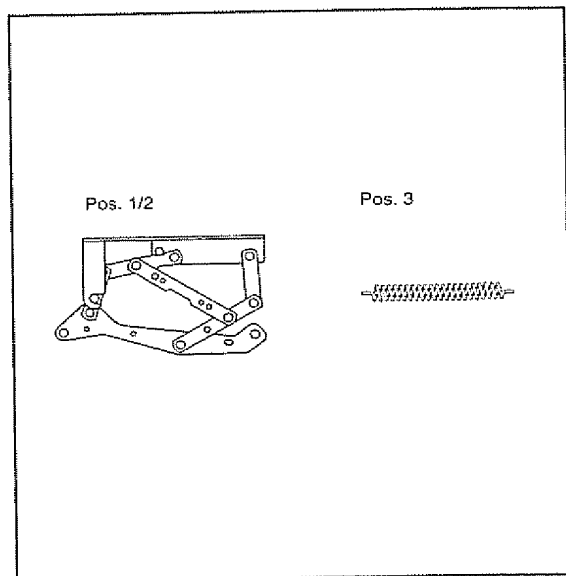


- Pos.1/2 Bettcouchbeschlag komplett links/rechts
Mechanism l/r <-> Ferrure g/d
- Pos.3 Zugfeder
Tension spring <-> Ressort de traction

Doppelbettcouchbeschläge Gleiterfunktion
Mechanisms for double bed-settees Glider
Mécanismes pour canapés-lits Glissière

96600

NEU


Gew.
9,5 kg

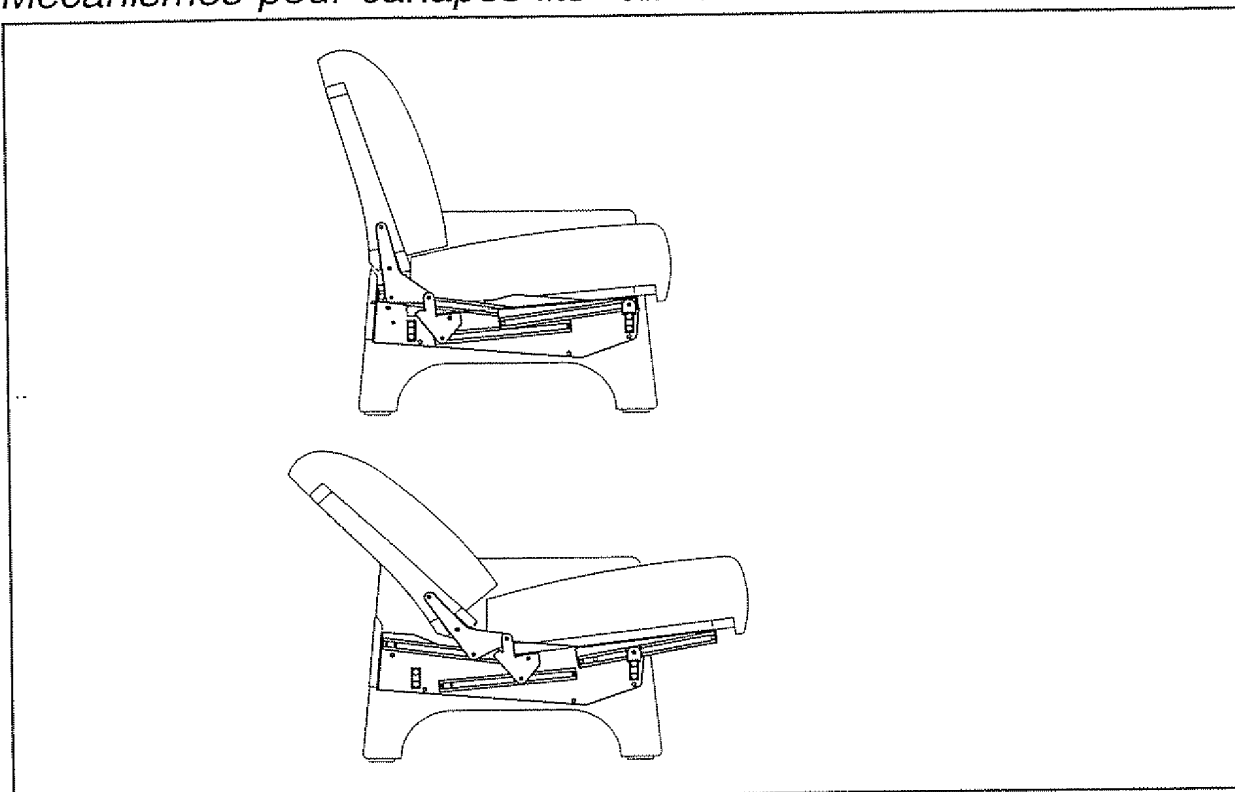

Sitz- und gekoppeltes Rückteil **manuell** durch Körperdruck verstellbar. Durch Verschrauben der Chassis entsteht eine selbsttragende Konstruktion für 2- und 3-Sitzer. - **Wandfreie Funktion**, geeignet für Garnituren -

Linked back and seat adjustment, manual operation. Selfsupporting construction for 2- and 3-seaters by chassis with screw connection. - wall-away-function, suited for living-room suites -

Assise et dossier reliés s'ajustent manuellement. Construction autonome pour divans à 2 et 3 places, grâce à fixation par vis. - fonction dos-au-mur, convient aux canapés -

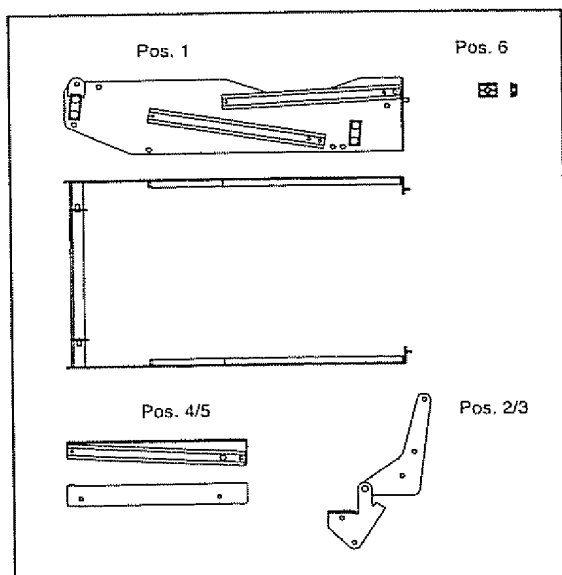


- Pos. 1 Chassis komplett
Chassis <> Châssis
- Pos. 2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos. 4/5 Winkel komplett
Angle <> Equerre de fixation
- Pos. 6 Kunststoffgleiter
Plastic gliders <> Glissières plastique

Doppelbettcouchbeschläge Gleiterfunktion
Mechanisms for double bed-settees Glider
Mécanismes pour canapés-lits Glissière

96700

NEU


Gew.
3,0 kg

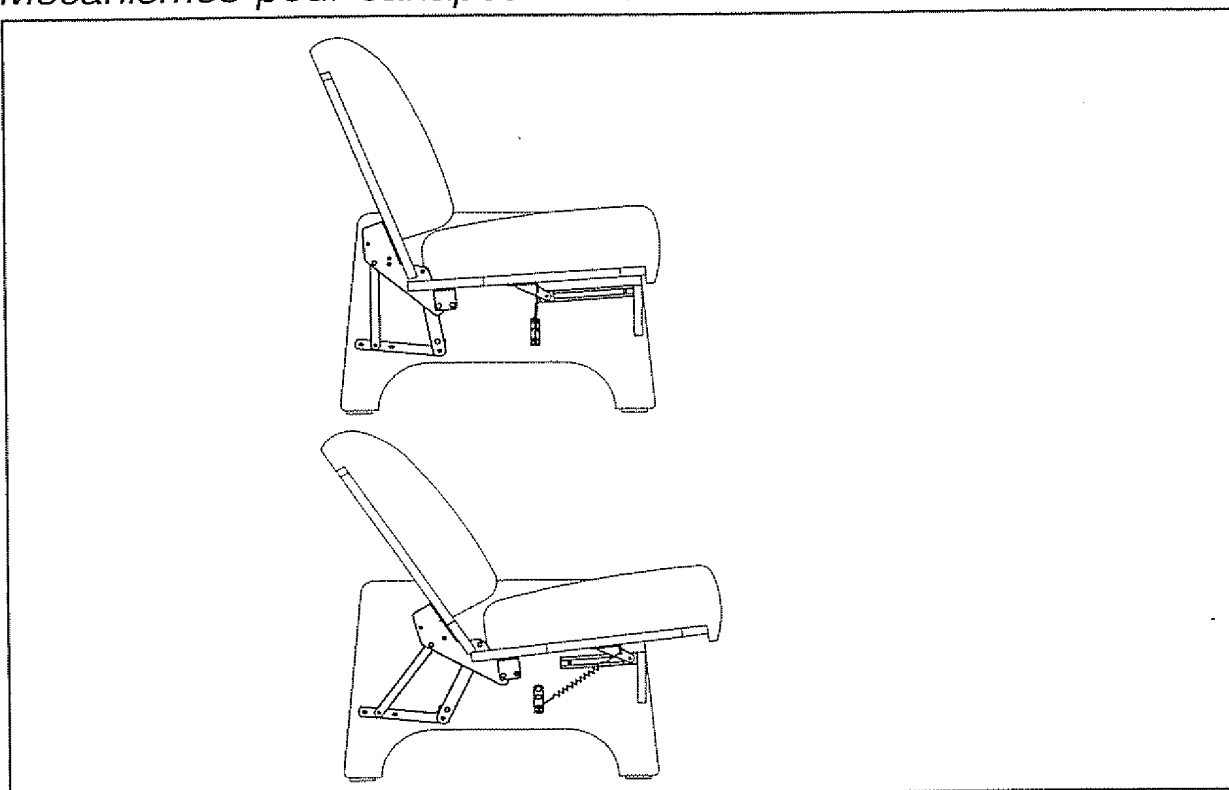

Sitz- und gekoppeltes Rückteil **manuell** durch Körperdruck verstellbar, Sitzvorschub über Excenter einstellbar.
- **Wandfreie Funktion**, geeignet für Garnituren -

Linked back and seat adjustment, **manual operation**. Advance of seat adjustable by excenter nuts.
- **wall-away-function**, suited for living-room suites -

Assise et dossier reliés s'ajustent **manuellement**. Avance du siège réglable par rondelles excentriques.
- **fonction dos-au-mur**, convient aux canapés -

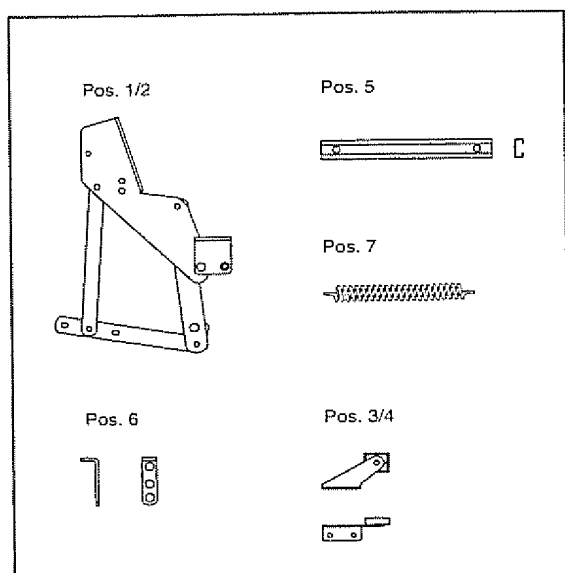

- Pos.1/2 Schwenkbeschlag komplett links/rechts
Pivot mechanism l/r <> Mécanisme pivotant g/d
- Pos.3/4 Winkel komplett mit Gleiter links/rechts
Angle with plastic gliders l/r <> Angle avec glissières plastique g/d
- Pos.5 C-Schiene
Glider <> Glissière
- Pos.6 Winkel
Angle <> Equerre de fixation
- Pos.7 Zugfeder
Tension spring <> Ressort de traction

Doppelbettcouchbeschläge Hebebeschläge


Mechanisms for double bed-settees Lift mechanism

Mécanismes pour canapés-lits Ferrure de levée

85501

.00

Gew.
3,0 kg

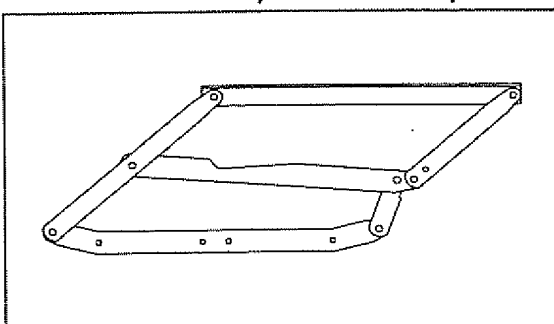

Hebebeschlag mit 180mm Hubhöhe und 120mm min. Einbauhöhe.


Lift mechanism with 180mm travel height, a minimum mounting height of 120mm.

Ferrure de levée avec course 180mm, hauteur de montage min. 120mm.

85501

.02

Gew.
3,2 kg

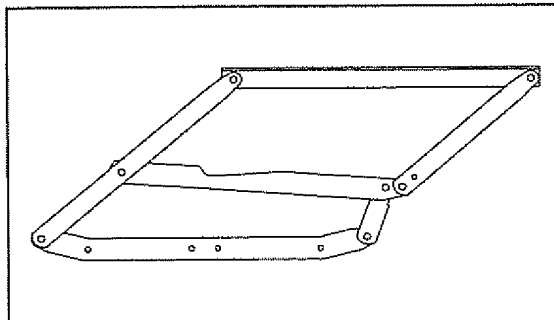

Hebebeschlag mit 200mm Hubhöhe und 120mm min. Einbauhöhe.


Lift mechanism with 200mm travel height, a minimum mounting height of 120mm.

Ferrure de levée avec course 200mm, hauteur de montage min. 120mm.

85501

.04

Gew.
3,0 kg

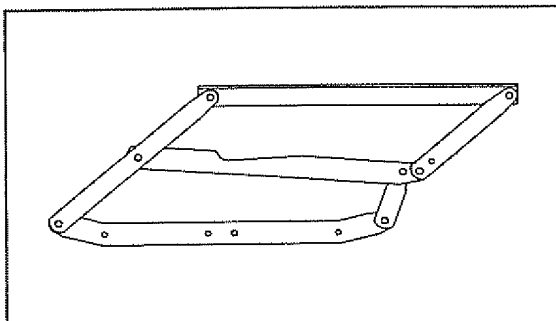

Hebebeschlag mit 165mm Hubhöhe und 120mm min. Einbauhöhe.


Lift mechanism with 165mm travel height, a minimum mounting height of 120mm.

Ferrure de levée avec course 165mm, hauteur de montage min. 120mm.

85502

.00

Gew.
2,6 kg

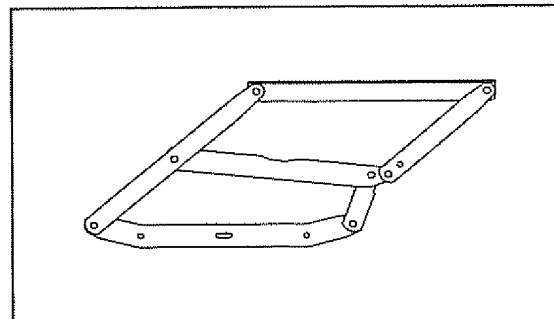


Hebebeschlag mit 180mm Hubhöhe und 120mm min. Einbauhöhe, verkürzte Bauform.

Lift mechanism with 180mm travel height, a minimum mounting height of 120mm, shortened version.

Ferrure de levée avec course 180mm, hauteur de montage min. 120mm, version courte.

85503

Gew.
2,8 kg

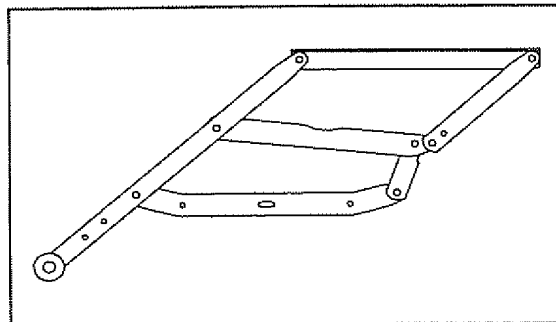

Hebebeschlag mit 180mm Hubhöhe und 120mm min. Einbauhöhe, für bodenfreie Modelle.


Lift mechanism with 180mm travel height, a minimum mounting height of 120mm, for high-leg models.

Ferrure de levée avec course 180mm, hauteur de montage min. 120mm, pour modèles sur pieds.

85502

.05

Gew.
2,6 kg

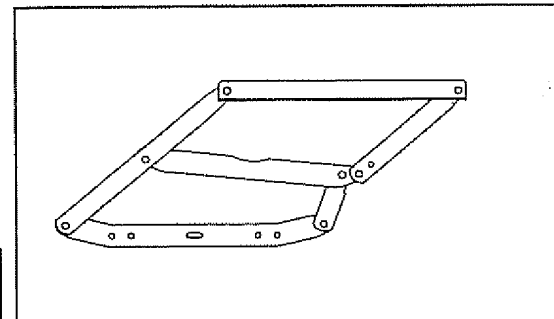

Hebebeschlag mit 180mm Hubhöhe und 120mm min. Einbauhöhe, verkürzte Bauform.

Lift mechanism with 180mm travel height, a minimum mounting height of 120mm, shortened version.




Ferrure de levée avec course 180mm, hauteur de montage min. 120mm, version courte.

Doppelbettcouchbeschläge Kopfstützbeschläge
Mechanisms for double bed-settees Head rest fitting
Mécanismes pour canapés-lits Appui-tête

93115

93115.00 und
93115.01

93115.10 und
93115.11



Gew.
1,4 kg

Höhen- und neigungsverstellbarer Kopfstützbeschlag, **niedrige Ausführung**, Hub=100mm.

- **schmale** Ausführung 93115.00 mit schwarzer Führungsbuchse u. 93115.01 mit verchromter Führungsbuchse -
- **geteilte** Ausführung 93115.10 mit schwarzer Führungsbuchse u. 93115.11 mit verchromter Führungsbuchse -

Head rest fitting, height and inclination adjustable, **low version**, travel=100mm.

- **narrow version** 93115.00 with black guide and 93115.01 with chromed guide -
- **divided version** 93115.10 with black guide and 93115.11 with chromed guide -




Appui-tête ajustable en hauteur et inclinaison, **version basse**, course=100mm.

- modèle **étroit** 93115.00 avec bague de guidage noire et 93115.01 avec bague de guidage chromée -
- modèle **large** 93115.10 avec bague de guidage noire et 93115.11 avec bague de guidage chromée -

93116

93116.00 und
93116.01

93116.10 und
93116.11



Gew.
1,5 kg

Höhen- und neigungsverstellbarer Kopfstützbeschlag, **hohe Ausführung**, Hub=220mm.

- **schmale** Ausführung 93116.00 mit schwarzer Führungsbuchse u. 93116.01 mit verchromter Führungsbuchse -
- **geteilte** Ausführung 93116.10 mit schwarzer Führungsbuchse u. 93116.11 mit verchromter Führungsbuchse -

Head rest fitting, height and inclination adjustable, **high version**, travel=220mm.

- **narrow version** 93116.00 with black guide and 93116.01 with chromed guide -
- **divided version** 93116.10 with black guide and 93116.11 with chromed guide -

Appui-tête ajustable en hauteur et inclinaison, **version haute**, course=220mm.


- modèle **étroit** 93116.00 avec bague de guidage noire et 93116.01 avec bague de guidage chromée -
- modèle **large** 93116.10 avec bague de guidage noire et 93116.11 avec bague de guidage chromée -

Ottomanenbeschläge Sitzhöhe gleich Liegehöhe

Mechanisms for ottomans Height of seat identic to height of sleep

Mécanismes pour récamières Hauteur d'assise identique à hauteur de couchage

87201

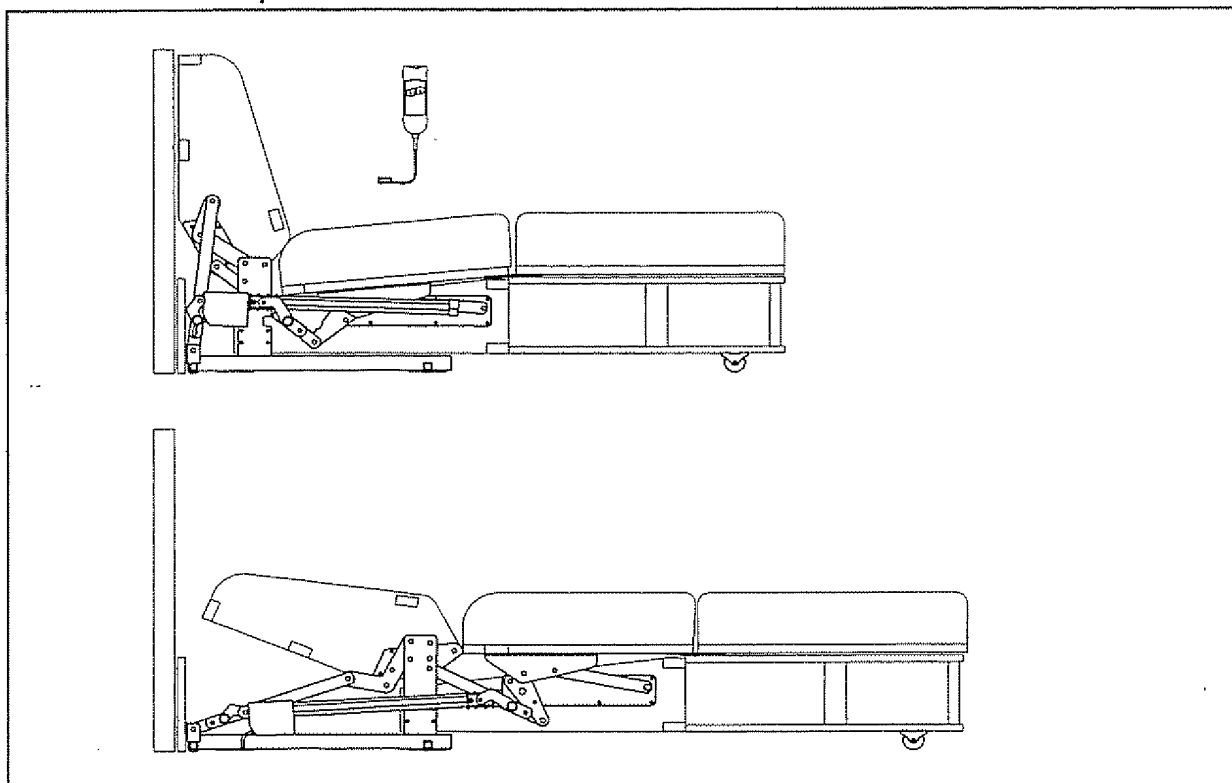


Gew.
22,5 kg

Rücken-, Sitz- und Fußteil schwenken motorisch von der Grundstellung über die Relaxposition bis zur Liegeposition, 1-motorig, geeignet für wandfreie Ottomanen. - Liegelänge ca. 200cm, Liegebreite bis 140cm -

Back, seat and foot pivot by only **one motor** from base position over relax position to sleep position, suited for wall-away ottomans. - sleeping length approx 200cm, sleeping width up to 140cm -

Dossier, assise et pieds pivotants, entraînement par **un moteur** de l'assise par la pos. relax jusqu'à l'horizontal, convient aux récamières dos au mur. - longueur de couchage 200cm, largeur de couchage jusqu'à 140cm -

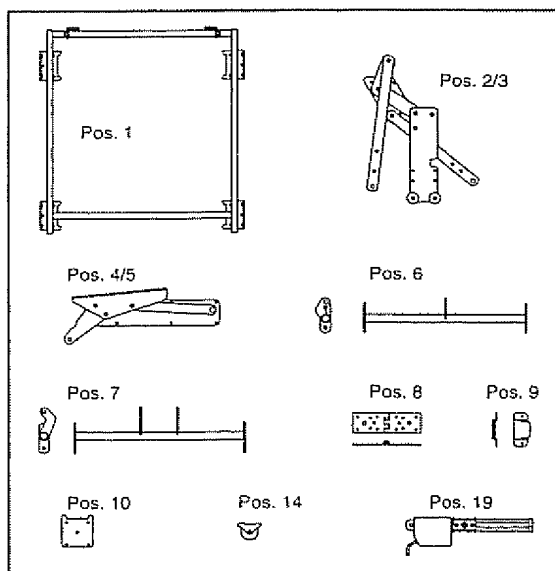


- Pos.1 Rahmen komplett
Frame <> Cadre
- Pos.2/3 Rückengelenk komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4/5 Hebebeschlag komplett links/rechts
Lift mechanism l/r <> Ferrure de levée g/d
- Pos.6 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.7 Traverse-Sitz komplett
Seat cross bar <> Traverse assise
- Pos.8 Scharnier komplett
Hinge <> Charnière
- Pos.9 Halterung
Holder <> Attache
- Pos.10 Blech
Plate <> Tôle
- Pos.14 Rolle komplett
Castor <> Roulette
- Pos.19 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Ottomanenbeschläge Sitzhöhe gleich Liegehöhe

Mechanisms for ottomans Height of seat identic to height of sleep

Mécanismes pour récamières Hauteur d'assise identique à hauteur de couchage

87206

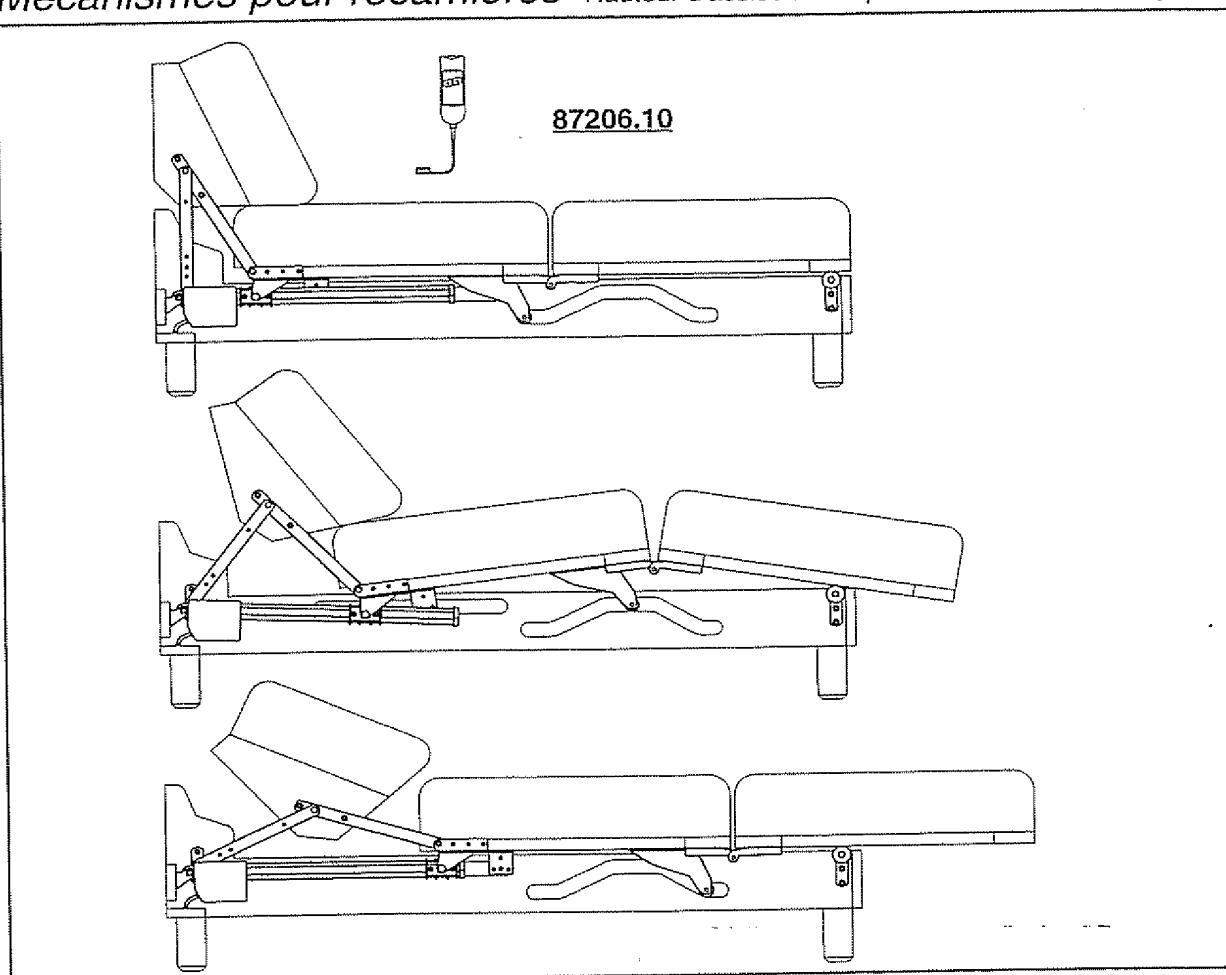


87206.10

Gew.
7,0 kg

Rücken-, Sitz- und Fußteil schwenken motorisch über die Relaxposition bis zur Liegeposition, **1-motorig**, geeignet für **boden- und wandfreie Ottomanen**. - **87206.05** ohne Knieanhebung, Liegelänge ca. 200cm -


Back, seat and foot pivot by only **one motor** from base position over relax position to sleep position, suited for **high-leg and wall-away ottomans**. - **87206.05** without knee movement, sleeping length approx 200cm -

Mécanisme à **un moteur**, les parties dos, assise et jambes viennent à l'horizontale en passant par la position relax, convient aux récamières **sur pieds, dos au mur**. - **87206.05** sans relève-genoux, long. de couchage 200cm -

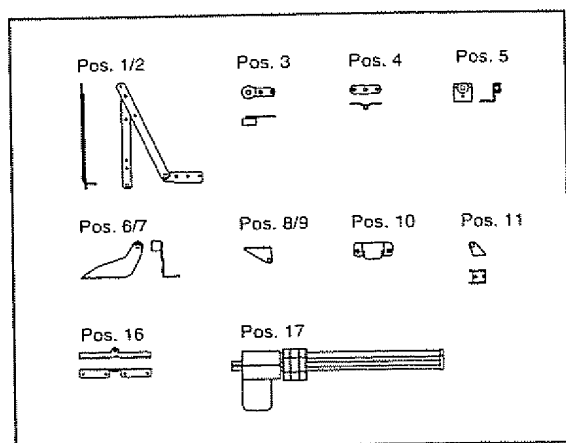

- Pos. 1/2 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos. 3 Lasche komplett mit Rolle
Fish-plate with castor <> Levier avec roulette
- Pos. 4 Lasche komplett
Fish-plate <> Levier
- Pos. 5 u. 6/7 Winkel komplett mit Rolle
Angle with castor <> Angle avec roulette
- Pos. 8/9 Winkel links/rechts
Angle l/r <> Angle g/d
- Pos. 10 Halterung
Holder <> Attache
- Pos. 11 Motorlasche
Motor attach <> Levier moteur
- Pos. 16 Scharnier komplett
Hinge <> Charnière
- Pos. 17 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Klappcouchbeschläge Mechanisms for bed-settees Mécanismes pour divans-lits

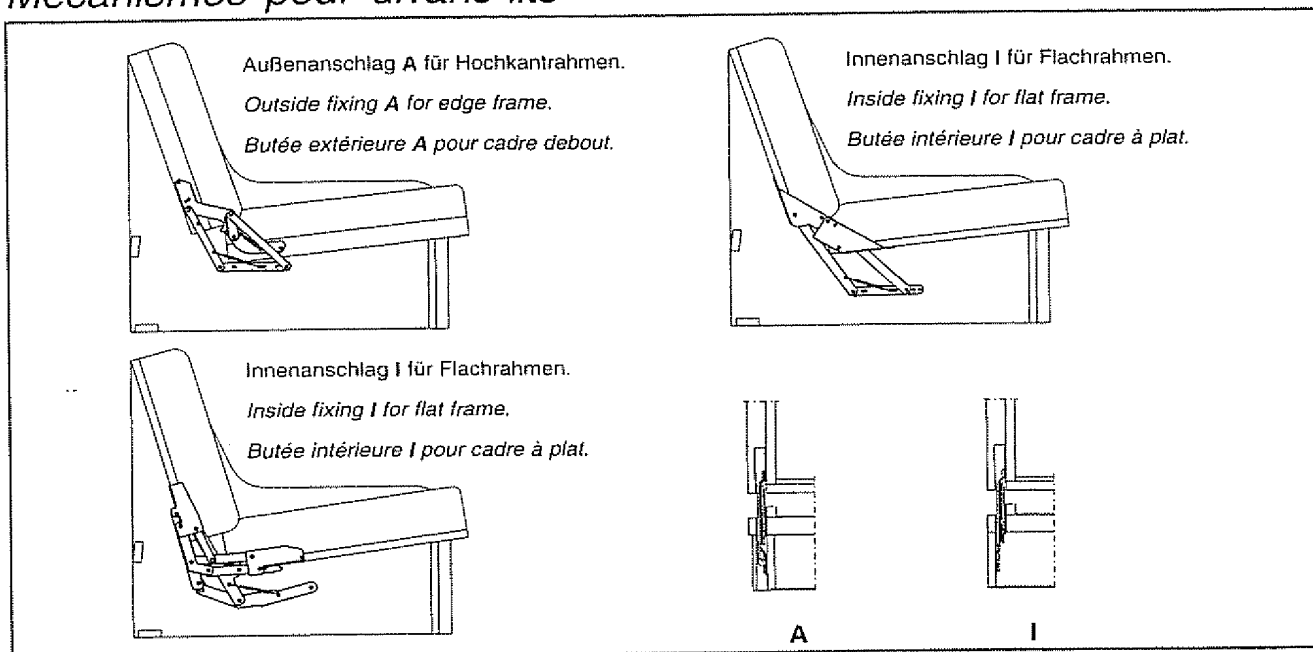

- Beschläge wandfrei mit verschiedenen Rückenhöhen und unterschiedlichen Vorschüben.
- Beschläge für Festpolster oder lose Kissen mit verschiedenen Drehpunkten.
- Beschläge mit Frontblenden- oder Kastenvorschub.
- Beschläge geeignet für Innen- oder Außenanschlag.
- Beschläge mit theoretischem Drehpunkt, Bewegungsablauf unterhalb der Polsterung.
- Beschläge mit zweiter Sitzstellung.
- Beschlagsoberflächen in einbrenn- oder tauchlackiert.
- Beschlagsbemusterung komplett eingebaut im Kundenmodell möglich.
- CAD-Einbauzeichnungen.
- Wall-away mechanisms with different heights of back and different forward travels.
- Mechanisms for fixed upholstery or separate cushions with different pivots.
- Mechanisms with forward travel of cover plates or storage boxes.
- Mechanisms suited for fixing inside or outside of frame.
- Mechanisms with theoretic pivot, movement under the upholstery.
- Mechanisms with second seat position.
- Surface in lacquered finish.
- Samples can be delivered mounted in customers' model.
- CAD-mounting drawings are available.
- Ferrures dos au mur avec différentes hauteurs de dossiers et diverses courses.
- Ferrures pour garnissages fixes ou coussins séparés, avec différents points de rotation.
- Ferrures avec déplacement du panneau frontal ou du coffre.
- Ferrures adaptées aux butées intérieures ou extérieures.
- Ferrures avec point de rotation théorique, développement cinématique sous les garnissages.
- Ferrures avec deuxième pos. d'assise.
- Surfaces des ferrures laquées au four ou par immersion.
- Possibilité d'échantillonnage, monté sur modèle du client.
- Plans de montage CAD disponibles.




Neuheiten seit der Interzum 2001.
New developments since Interzum 2001.
Nouveautés depuis Interzum 2001.

Gew.
ca. kg

Beschlagsgewicht komplett.
Weight of complete mechanism.
Poids de la ferrure complète.

Klappcouchbeschläge Mechanisms for bed-settees Mécanismes pour divans-lits


88110

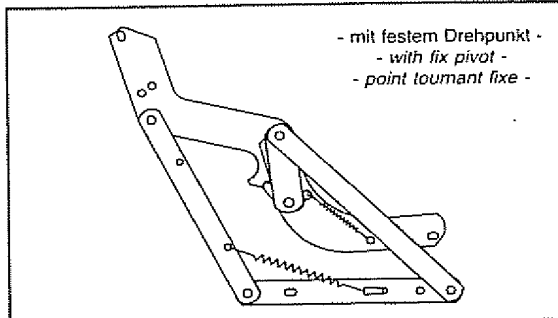

Gew.
1,7 kg

Beschlag für Hochkantrahmen mit Außenanschlag.
- 88120 mit großem, 88130 mit sehr gr. Vorschub -
Mechanism for edge frame with outside fixing.
- 88120 with big, 88130 w. very big forward travel -
Ferrure pour cadre debout avec butée extérieure.
- 88120 grande, 88130 très grande avance -

80711

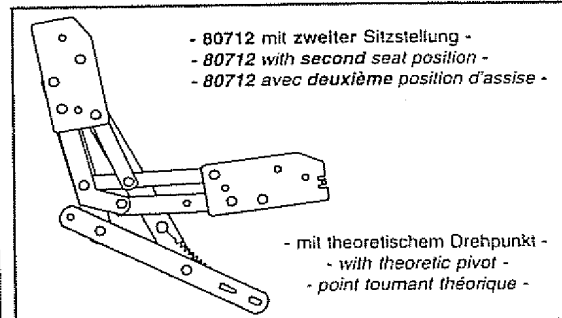


Gew.
3,2 kg

Beschlag für Hochkantrahmen mit Außenanschlag.
- 80700 für Flachrahmen mit Innenanschlag -
Mechanism for edge frame with outside fixing.
- 80700 for flat frames with inside fixing -
Ferrure pour cadre avec butée extérieure.
- 80700 pour cadre à plat avec butée intérieure -

88140

NEU

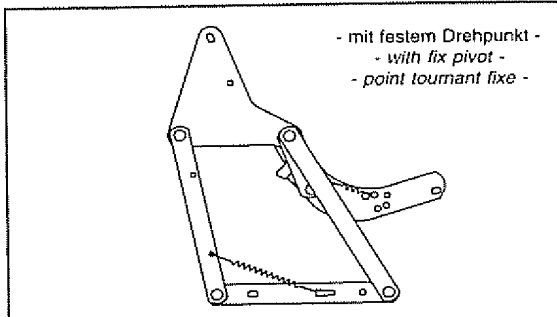


Gew.
1,8 kg

Beschlag mit großem Vorschub, für Hochkantrahmen mit Außenanschlag.
Mechanism with big forward travel, for edge frame with outside fixing.
Ferrure avec grande avance pour cadre à plat pour cadre debout avec butée extérieure.

88141


NEU

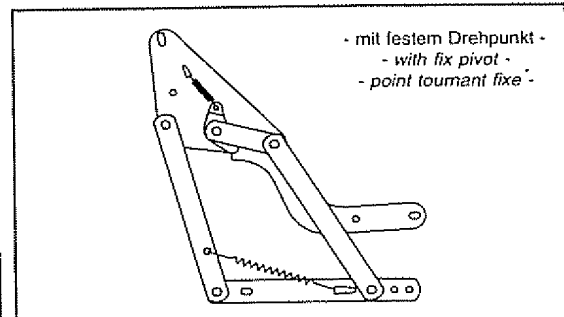

Gew.
1,8 kg

Beschlag mit großem Vorschub, für Hochkantrahmen mit Außenanschlag.
Mechanism with big forward travel, for edge frame with outside fixing.
Ferrure avec grande avance pour cadre à plat pour cadre debout avec butée extérieure.


88138

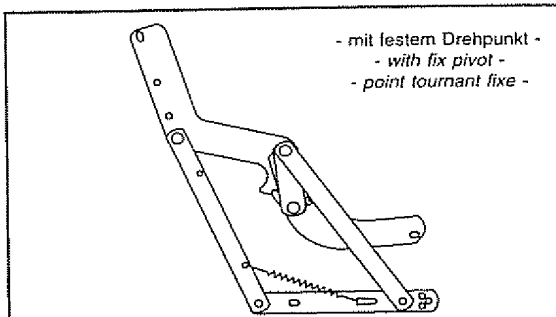

Gew.
1,9 kg

Beschlag mit verlängertem Rückengetriebe, für Hochkantrahmen mit Außenanschlag.
Mechanism with extended back mechanism, for edge frames with outside fixing.
Ferrure à partie dos rallongée, pour cadre debout avec butée extérieure.

83300

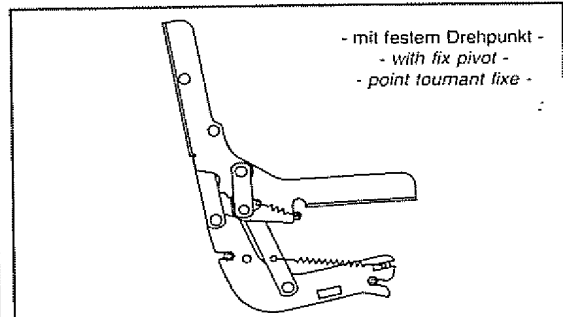

Gew.
2,4 kg


Beschlag für Flachrahmen mit Innenanschlag, mit zweiter Sitzstellung.
Mechanism for flat frame with inside fixing, with second seat position.
Ferrure pour cadre à plat avec butée intérieure, avec deuxième position d'assise.

Fernsehsessel Baukastensystem

Recliner chairs Modular system

Fauteuils de relaxation Système modulaire

- Befestigungsbohrungen innerhalb der einzelnen Beschlagsbaureihen gleich.
- Chassis mit 51, 52, 54 u. 57cm Breite.
- Beschlagsoberflächen in verzinkt, einbrenn- oder tauchlackiert.
- Fast alle Beschläge sind **optional** mit Fußklappenverlängerung lieferbar.
- Fußscherenbeschläge sind **optional** mit Sicherheitsabdeckung lieferbar.
- Überpolsterung zwischen Sitz und Fußklappe möglich.
- Polsterstärke und Bezugsart beeinflussen die Leichtgängigkeit der Beschläge.
- Höher belastete Beschlagsdrehpunkte sind kunststoffgebuchst.
- Qualitätsüberprüfung durch Dauertests. (10000 Zyklen mit 120 kg Belastung)
- Motore und Gasfedern TÜV geprüft.
- Beschlagsbemusterung komplett eingebaut in Sesselgestellen möglich.
- CAD-Einbauzeichnungen u. grafische Stücklisten stehen zur Verfügung.
- Drehbar vernietete Beschläge erzeugen funktionsbedingt Abrieb.
- Same fixing points within the different mechanism groups.
- Chassis available in widths of 51,52,54 and 57cm.
- Surface galvanised or in lacquered finish.
- Nearly all mechanisms **optionally** available with foot rest extension.
- Foot mechanisms **optionally** available with security cover.
- Duvet cover between seat cushion and foot rest possible.
- Thickness of upholstery and type of fabric influence smooth movement of mechanisms.
- High loaded pivots of mechanisms are plastic bushed.
- Quality assured by continuous testing. (10,000 cycles with a load of 120kg)
- Motors and gas springs are tested by the legal security institution TÜV.
- Samples can be delivered mounted in customers' model.
- CAD-mounting drawings and graphical component lists are available.
- Movable riveting causes abrasion.
- Mêmes points de montage des différentes ferrures d'une même série.
- Largeurs de châssis 51,52,54 et 57cm.
- Surfaces des ferrures zinguées, laquées au four ou par immersion.
- La plupart des mécaniques peut être équipée en **option** d'une rallonge repose-jambes.
- Les mécanismes des relève-jambes peuvent être équipés en **option**, de caches de sécurité.
- Garnissage possible entre assise et relève-jambes.
- L'épaisseur du garnissage et le type de tissus influencent la facilité de fonctionnement.
- Points de rotation à haute charge entourés de plastique.
- Contrôle qualité par tests permanents. (10000 cycles avec 120kg)
- Les moteurs et vérins à gaz disposent du label TÜV.
- Possibilité de monter des échantillons dans les modèles de nos clients.
- Les plans de montage CAD et nomenclatures graphiques des composants sont disponibles.
- Rivetage tournant cause abrasion.



Bei Bestellungen bitte folgende Bestellmaße zu den Beschlagbezeichnungen angeben.

Lichtes Maß zwischen den Armlehnen	Chassisbreite	L Chassis
Lichtes Rückeninnenmaß	Traversenbreite	L Rücken
Lichtes Sitzrahmeninnenmaß	Traversenbreite	L Sitz

With order please indicate also following dimensions.

Inside dimension between armrests	width of chassis	L Chassis
Inside dimension of back frame	width of cross bar	L Rücken
Inside dimension of seat frame	width of cross bar	L Sitz

Pour vos commandes, veuillez compléter les références des ferrures par les dimensions suivantes.


Largeur intérieure entre accoudoirs	largeur de châssis	L Chassis
Largeur intérieure structure du dossier	largeur de traverse	L Rücken
Largeur intérieure cadre d'assise	largeur de traverse	L Sitz

Perfektion in der Funktion


Fernsehsessel Erläuterung der Symbolleiste

Recliner chairs Explanation of the symbols


Fauteuils de relaxation Explication des symboles




Neuheiten seit der interzum 2001.
New developments since interzum 2001.
Nouveautés depuis interzum 2001.



Bauartgeprüfte Funktions-
beschläge.
Approved mechanisms.




Beschlagsgewicht inklusive Kleinteile.
Weight of mechanism including accessories.
Poids de la ferrure, accessoires compris.




Fußklappenbewegung bis zur Waagerechten, gekoppelt leichte Neigung von Sitz und Rücken, dann Rückenverstellung bis zur Liegeposition.

Movement of foot rest up to horizontal position, together with slight inclination of seat and back, then back movement down to sleep position.

Mouvement du repose-jambes jusqu'à l'horizontal, synchrone avec une légère inclinaison de l'assise et du dossier, puis ouverture du dos jusqu'à la position couchée.




Eine unterschlagende Fußklappe.
One foldable foot rest.
Une rallonge escamotable.



Fußklappenbewegung bis zur Waagerechten, gekoppelt mit Kippen der starren Sitz/Rückeneinheit, im letzten Bewegungsablauf leichtes Einziehen der Fußklappe bis zur Relaxposition.

Movement of foot rest up to horizontal position, together with inclination of seat/back unit, during last part of movement slight pulling in of foot rest up to relax position.


Mouvement du repose-jambes jusqu'à l'horizontal, synchrone avec inclinaison de l'ensemble rigide assise-dos, légère descente du R.J. pour arriver à la position relax.



Fußklappen- und Rückenbewegung synchron bis zur Liegeposition.

Movement of foot rest and back synchronously move down into a sleep position.


R.J. et dossier en mouvement simultané jusqu'à la position couchée.



Fernsehposition, Fußklappe waagrecht und leichte Neigung von Sitz und Rücken.

TV-position, foot rest horizontal and slight inclination of seat and back.


Position „télé“, R.J. horizontal, légère inclinaison du siège et du dos.



Aufstehhilfe, hebt den Sessel zum leichteren Aufstehen und Setzen an.

Riser, lifts the complete armchair.


Aide à la verticalisation (releveur), facilité pour se lever et s'asseoir.



Drehfunktion 350 Grad im Standfuß.

350° swivel function.


Fonction de rotation de 350° dans le socle.



Individuelles Einstellen der Fußklappen.

Individual positioning of the foot rest.


Positionnement indépendant du repose-jambes.



Individuelles Einstellen des Rückens.

Individual positioning of back.


Positionnement indépendant du dossier.



Herz-Waage-Position, nach erreichter Liegeposition leichtes Kippen von Fuß-Sitz-Rücken.

Heart Circulation Position obtained after chair is in sleep position. Foot and seat raise above height of back.

Position décline, après la pos. couchée, léger basculement de l'ensemble jambes-siège-dos.




Fußklappenverlängerung, vergrößert die Liegelänge.
- als Option erhältlich -

Foot rest extension, increases the sleeping length.

- optional extra -


Rallonge du R.J. augmente la longueur de l'ensemble.
- en option -



Unterschlagende zweite Fußklappe.

Additional foot rest, foldable.


R.J. escamotable en 2 parties.



Der Beschlag erlaubt das an der Wand stehen des Polstermöbels während der Betätigung, Wandfrei.

Wall-away.

Dos au mur.



Zwischenbrett, schließt die Öffnung zwischen Fußklappe und Sitz.

Additional foot rest, closes the hole between foot rest and seat.

Surface R.J. intermédiaire, comble l'espace entre l'assise et le relève-jambes.

Fernsehsessel Übersicht der wandfreien Beschläge mit 3 Positionen

Recliner chairs Summary of wall-away mechanisms with 3 positions

Fauteuils de relaxation Sommaire des mécanismes dos au mur à 3 positions

Starthilfe	1 Motor	2 Motore	Lift
Fernsehposition	Fernsehposition	Fernsehposition	2 Motore Fernsehposition
91101 	91102 	91103 	91104 

- Neue Beschlagsbaureihe für einzelne Fernsehsessel, Couches und Garnituren.
- Der Beschlagsablauf erlaubt das wandnahe Aufstellen des Polstermöbels.
- Der Beschlag ist geeignet sowohl für Polstermöbel mit feststehenden Armlehnen als auch für Polstermöbel bei denen sich die Armlehnen mit dem Sitz nach vorne bewegen sollen.
- Der Beschlag hat einen sehr ausgewogenen Bewegungsablauf, dadurch perfekte Funktion für unterschiedlichste Personen.
- Der Beschlagsaufbau im Baukastensystem und die durchdachte Montage verringern die Folgekosten.

Auslösungen für 91101

- | | | |
|-------------------|----|---|
| 91140 Flip-Flop | -> | Auslösen durch leichten Druck gegen die Fußklappe und Einrasten nach Schließen der Fußklappe automatisch. |
| 91141 Griffschale | -> | Auslösen durch betätigen der Griffschale, des Innenhebels bzw. der Schlaufe |
| 91142 Innenhebel | | und Einrasten nach schließen automatisch. |
| 91143 Schlaufe | | |

Querverbindung für 91101, 91102, 91103 und 91104 ohne automatischen Stützfuss

- | | | |
|---|----|--|
| 91110 Querverbindung | -> | Breitenabhängige Verbindung zwischen den Kunststoffführungen. |
| 91111 Querverbindung mit Armlehnenbefestigung | -> | Breitenabhängige Verbindung zwischen den Kunststoffführungen und Befestigungen für feststehende Armlehnen. |
| 91112 Querverbindung mit Elementbefestigung | -> | Breitenabhängige Verbindung zwischen den Kunststoffführungen und Adapterblech zur Befestigung von Elementverbindern. |

Querverbindung für 91101, 91102, 91103 und 91104 mit automatischen Stützfuss

Der automatische Stützfuss klappt bei Betätigung der Rückenfunktion aus und verhindert das nach vorne Kippen des Fernsehsessels in geöffneter Position.

- | | | |
|---|----|--|
| 91120 Querverbindung | -> | Breitenabhängige Verbindung zwischen den Kunststoffführungen. |
| 91121 Querverbindung mit Armlehnenbefestigung | -> | Breitenabhängige Verbindung zwischen den Kunststoffführungen und Befestigungen für feststehende Armlehnen. |
| 91122 Querverbindung mit Elementbefestigung | -> | Breitenabhängige Verbindung zwischen den Kunststoffführungen und Adapterblech zur Befestigung von Elementverbindern. |

Zubehör für 91101, 91102, 91103 und 91104

- | | | |
|-------------------------------|----|--|
| 91130 Winkel | -> | Zur Befestigung der Armlehne am Sitz. |
| 91131 Steckbarkeit | -> | Zur steckbaren, leichteren Montage des gepolsterten Rückenteils. |
| 91132 Fussklappenverlängerung | | |


Fernsehessel Übersicht der Beschläge mit 3 und 4 Positionen

Recliner chairs Summary of mechanisms with 3 and 4 positions

Fauteuils de relaxation Sommaire des mécanismes à 3 et 4 positions

Manuell Fernsehposition 97850 	Manuell Fernsehposition 97650 	Starthilfe Innenhebel- auslösung 97660 	Starthilfe Griffschalen- auslösung 97662 	1 Motor 97847 	1 Motor Fernsehposition 97637 	1 Motor Fernsehposition 97657 
--	--	--	--	---	--	--

1 Gestell

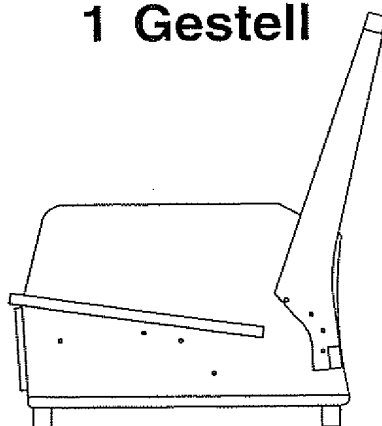

23 Funktionen

- gleiche Anschraubungen -
- Chassisbreiten 51, 52, 54 und 57cm -

-  Beweglicher Sitz, Standardfußscherenlänge.
-  Feststehender Sitz, Hammerkissen geeignet.
-  Herz-Waage-Position, lange Fußschere, Zwischenbrett.
-  Beschlag nicht im Katalog abgebildet.

Lift 2 Motore Fernsehposition 97713 
--

Lift 1 Motor Fernsehposition 97711 
--

2 Motore Okimat 300 Fernsehposition 97709 

1 Motor Fernsehposition 97707 
--

Starthilfe Rücken, Gasfeder 2 Innenhebelausl. 97703 

Starthilfe Innenhebel- auslösung 97701 
--

Manuell Fernsehposition 97700 
--

Lift 3 Motore 99697 
--

2 Motore Waagerechte Rückenöffnung 99696 
--

2 Motore Okimat 300 99609 
--

Lift 2 Motore Fernsehposition 98297 

2 Motore Okimat 300 Fernsehposition 97609 

2 Motore Okimat 300 H-W-Position 97689 

Lift 1 Motor 98277 

Lift 1 Motor Fernsehposition 98237 
--

Lift 1 Motor Fernsehposition 98287 
--

Fernsehsessel Übersicht der Beschläge mit 2 Positionen

Recliner chairs Summary of mechanisms with 2 positions

Fauteuils de relaxation Sommaire des mécanismes à 2 positions

Manuell

98400

S.80


1 Motor

Mono - Okimat 300

98490

S.80

1 Gestell

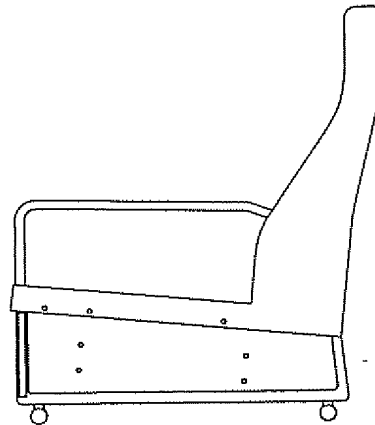

3 Funktionen

- gleiche Anschraubungen -
- Chassisbreiten 51, 52, 54 und 57cm -

Lift



1 Motor

98487

S.81

Fernsehsesselbeschläge mit 3 Positionen und wall-away Funktion
Recliner chair mechanisms with 3 positions and wall-away function -
Mécanismes pour fauteuils de relaxation avec 3 positions et dos au mur

91101

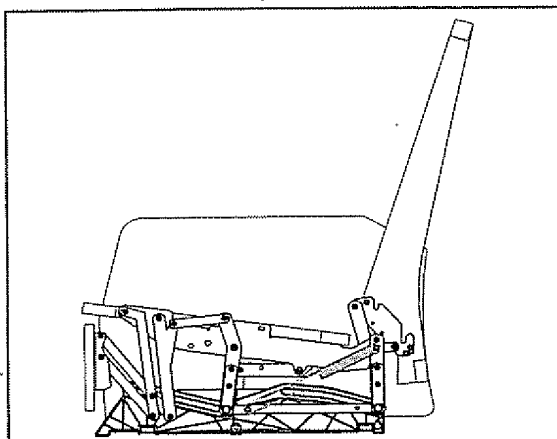



Rücken **manuell** durch Körperdruck verstellbar und Fußklappe mit **Starthilfe**.

Manual back and foot rest with **starting aid**.

Dos manuel par appui du corps, RJ avec aide au démarrage.

91102

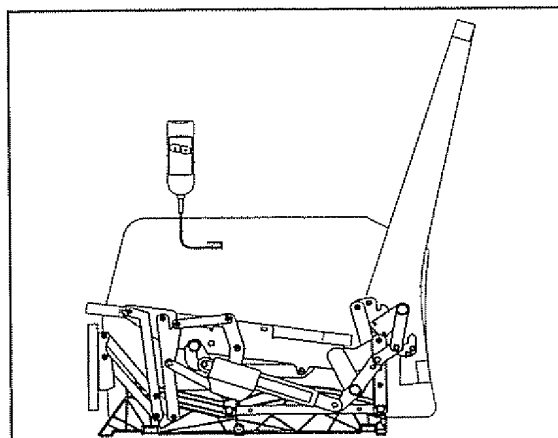


Rücken und Fußklappe mit einem Motor verstellbar, **1-motorig**.

Back and foot rest operated together by one motor.

Dos et RJ réglables par un seul moteur.




Gew.
7,9 kg

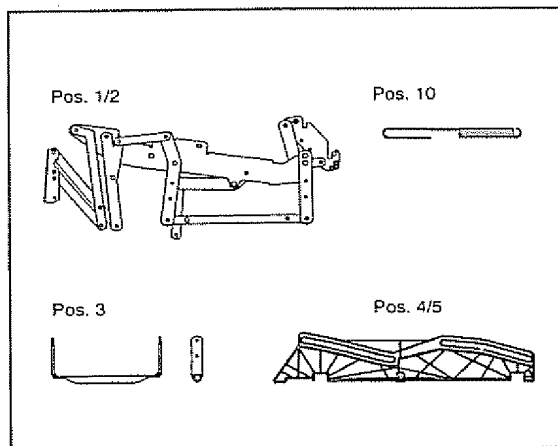

- Pos.1/2 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.3 Traverse komplett
Cross bar <> Traverse
- Pos.4/5 Kunststoffführungsplatte
Plastic curve plate <> Platine de guidage, plastique
- Pos.10 Zugfeder
Tension spring <> Ressort de traction



Gew.
10,5 kg

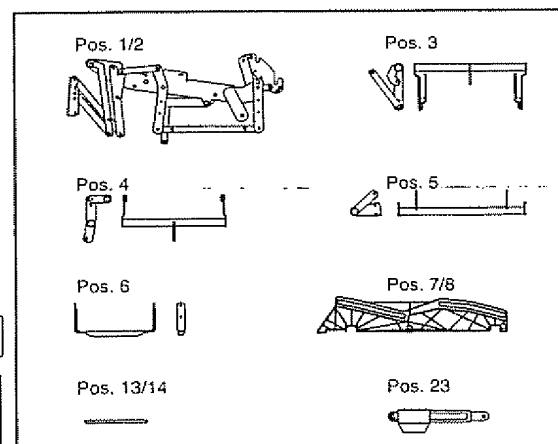



- Pos.1/2 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.3 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.4 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.5 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.6 Traverse komplett
Cross bar <> Traverse
- Pos.7/8 Kunststoffführungsplatte
Plastic curve plate <> Platine de guidage, plastique
- Pos.13/14 Achse
axle <> axe
- Pos.23 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge mit 3 Positionen und wall-away Funktion

Recliner chair mechanisms with 3 positions and wall-away function

Mécanismes pour fauteuils de relaxation avec 3 positions et dos au mur

91103

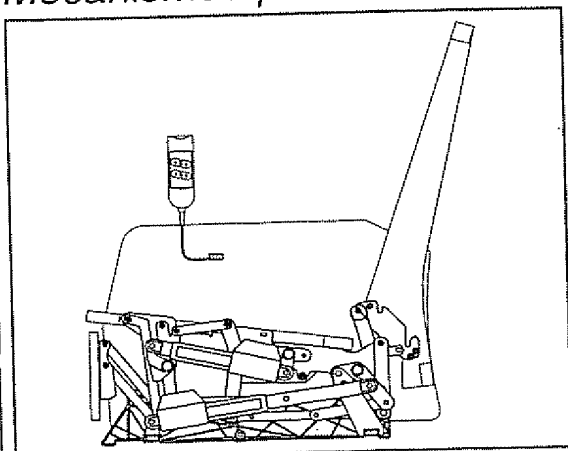


Rücken und Fußklappe mit je einem Motor verstellbar, 2-motorig.

Back and foot rest each controlled by one motor, 2 motors.

Dos et RJ réglables par deux moteurs indépendants, 2 moteurs.





Gew.
18,2 kg

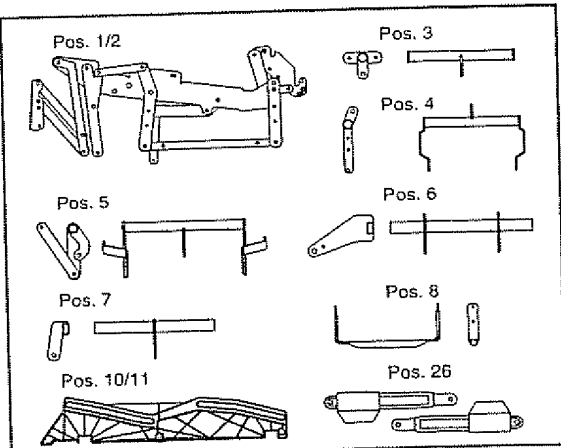

- Pos.1/2 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.3 Traverse Chassis komplett
Chassis cross bar <> Traverse châssis
- Pos.4 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.5 Traverse-Antrieb komplett
Motor cross bar <> Traverse moteur
- Pos.6 Traverse komplett
Cross bar <> Traverse
- Pos.7 Traverse komplett
Cross bar <> Traverse
- Pos.8 Traverse komplett
Cross bar <> Traverse
- Pos.10/11 Kunststoffführungsplatte
Plastic curve plate <> Platine de guidage, plastique
- Pos.26 FS 2-Antrieb
FS 2-motor <> Moteur FS 2

91104

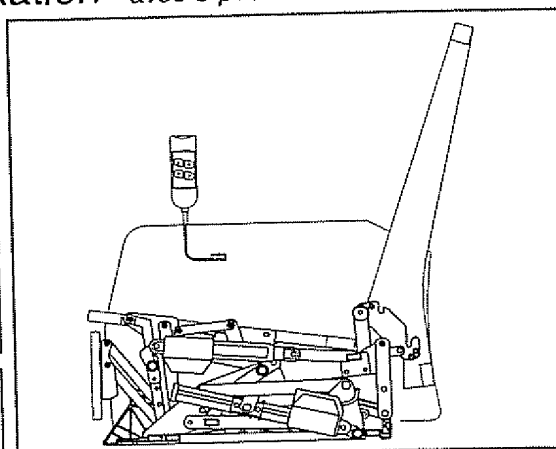

Aufstehhilfe gekoppelt mit Rücken und Fußklappe mit je einem Motor verstellbar, 2-motorig.
- Geeignet für Garnituren -

Riser and back operated by one motor and and foot rest operated by one motor, 2 motors.


- suited for living-room suites -

Releveur combiné avec dossier et RJ, réglables par deux moteurs indépendants, 2 moteurs.

- convient aux canapés -




Gew.
27,2 kg

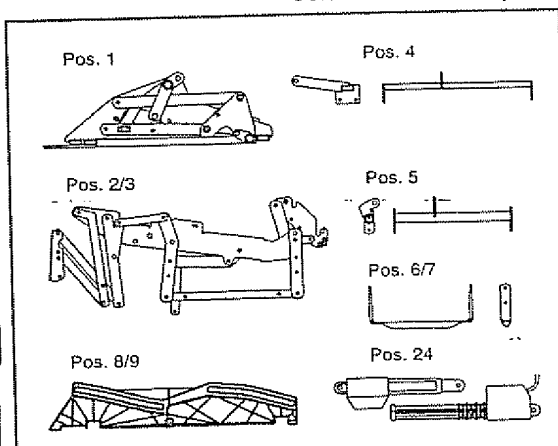

- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2/3 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.4 Traverse Chassis komplett
Chassis cross bar <> Traverse châssis
- Pos.5 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.6/7 Traverse komplett
Cross bar <> Traverse
- Pos.8/9 Kunststoffführungsplatte
Plastic curve plate <> Platine de guidage, plastique
- Pos.24 FS 2-Antrieb
FS 2-motor <> Moteur FS 2

Fernsehsesselbeschläge mit Herz-Waage-Positionen
Recliner chair mechanisms with heart-circulation-position
Mécanismes pour fauteuils de relaxation avec position décline

97700


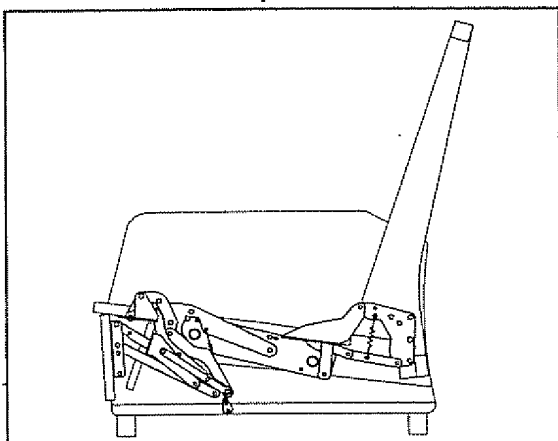


Rücken und Fußklappe **manuell** durch Körperdruck verstellbar.

Manual back and foot rest push-on-arm.

Dos et RJ manuels, réglables par appui du corps.

97701

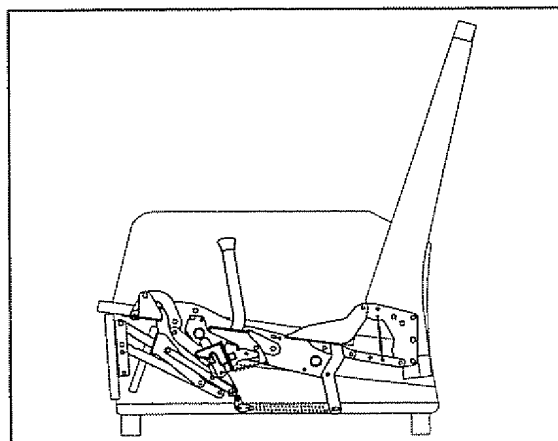


Rücken **manuell** durch Körperdruck verstellbar und Fußklappe mit **Starthilfe**, Innenhebelauslösung.

Manual back and foot rest with **starting aid**, operated by inside tag.

Dos manuel par appui du corps, RJ avec aide au démarrage, levier de déclenchement interne.




Gew.
8,2 kg

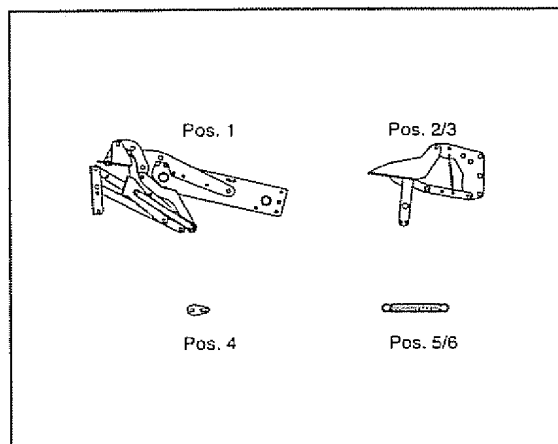

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Federlasche
Spring attachment <> Axe de ressort
- Pos.5/6 Zugfeder
Tension spring <> Ressort de traction





Gew.
10,8 kg

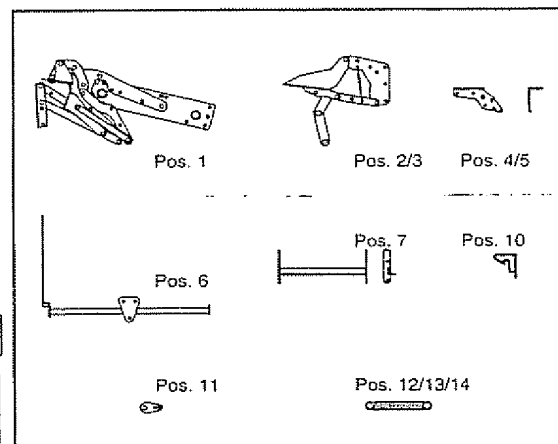

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4/5 Winkel
Angle <> Equerre de fixation
- Pos.6 Traverse-Auslösung komplett
Release cross bar <> Traverse de déclenchement
- Pos.7 Traverse-Verriegelung komplett
Lock cross bar <> Traverse de verrouillage
- Pos.10 Kunststofffänger
Plastic catch <> Crochet de retenue en plastique
- Pos.11 Federlasche
Spring attachment <> Axe de ressort
- Pos.12-14 Zugfeder
Tension spring <> Ressort de traction

Fernsehsesselbeschläge mit Herz-Waage-Positionen
Recliner chair mechanisms with heart-circulation-position
Mécanismes pour fauteuils de relaxation avec position décline

97703

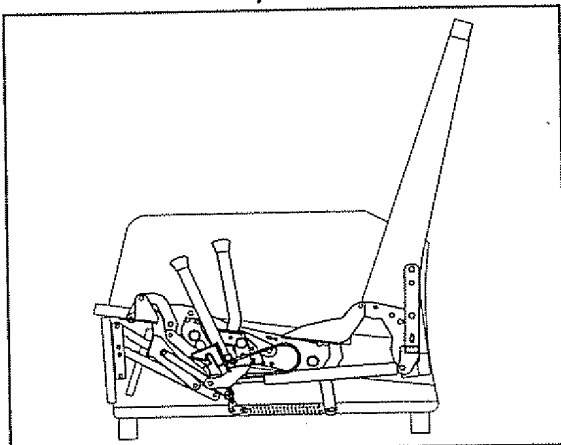



Rücken mit **Gasfeder** verstellbar und Fußklappe mit **Starthilfe**, doppelte Innenhebelauslösung.

Back rest controlled by **gas spring** and foot rest with **starting aid**, operated by double inside tag.

Dos réglable par vérin à gaz, RJ avec aide au démarrage, double levier de déclenchement interne.

97707

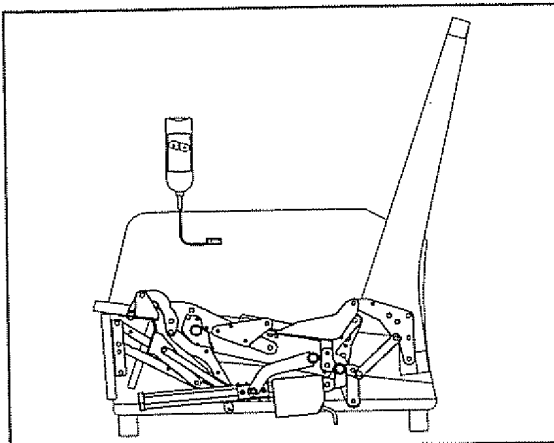


Rücken und Fußklappe mit einem Motor verstellbar, **1-motorig**.

Back and foot rest operated by **one motor**.

Dos et RJ réglables par un seul moteur.




Gew.
12,2 kg

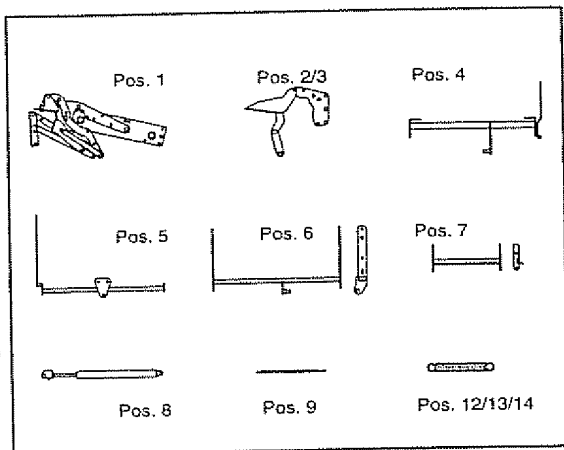

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Auslösung komplett
Release cross bar <> Traverse de déclenchement
- Pos.5 Traverse-Auslösung komplett
Release cross bar <> Traverse de déclenchement
- Pos.6 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.7 Traverse-Verriegelung komplett
Lock cross bar <> Traverse de verrouillage
- Pos.8 Gasfeder
Gas spring <> Vérin à gaz
- Pos.9 Bowdenzug komplett
Cable <> Cable gainé
- Pos.12-14 Zugfeder
Tension spring <> Ressort de traction




Gew.
14,6 kg

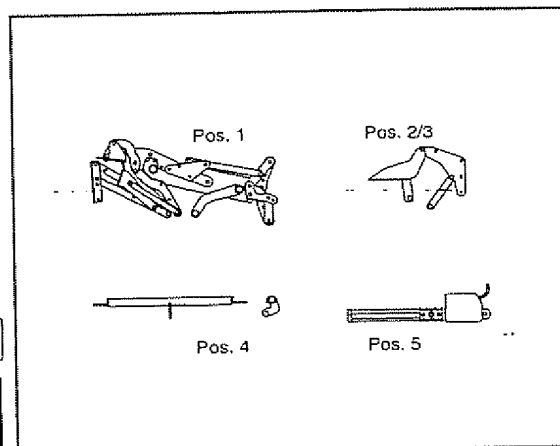

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.5 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge mit Herz-Waage-Positionen
Recliner chair mechanisms with heart-circulation-position
Mécanismes pour fauteuils de relaxation avec position décline

97709

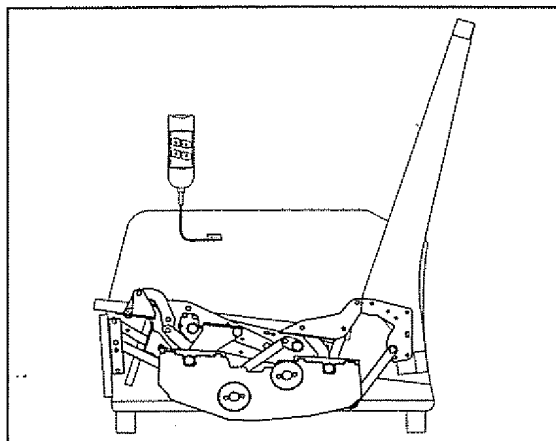


Rücken und Fußklappe mit je einem Motor verstellbar, **2-motorig, Okimat 300.**

Back and foot rest each operated by one motor, **2 motors, Okimat 300.**

Dos et RJ réglables par deux moteurs indépendants, **2 moteurs, Okimat 300.**




Gew.
16,4 kg

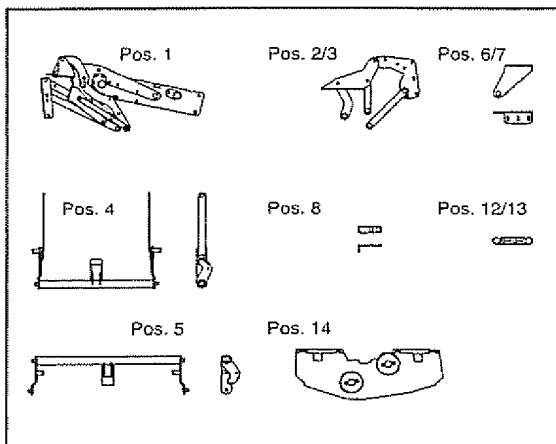

- Pos.1 Chassis komplett
Chassis <=> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <=> Ferrure dos g/d
- Pos.4 Traverse-Fuß komplett
Foot cross bar <=> Traverse pieds
- Pos.5 Traverse-Rücken komplett
Back cross bar <=> Traverse dos
- Pos.6/7 Winkel
Angle <=> Equerre de fixation
- Pos.8 Winkel
Angle <=> Equerre de fixation
- Pos.12/13 Zugfeder
Tension spring <=> Ressort de traction
- Pos.14 Antrieb Okimat 300
Motor Okimat 300 <=> Moteur Okimat 300

97711

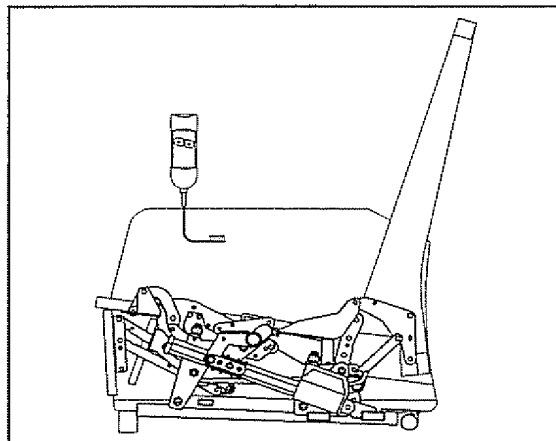


Aufstehhilfe, Rücken und Fußklappe mit einem Motor verstellbar, **1-motorig.**

Riser, back and foot rest operated together by one motor.

Releveur, dos et RJ réglables par un seul moteur.





Gew.
26,0 kg

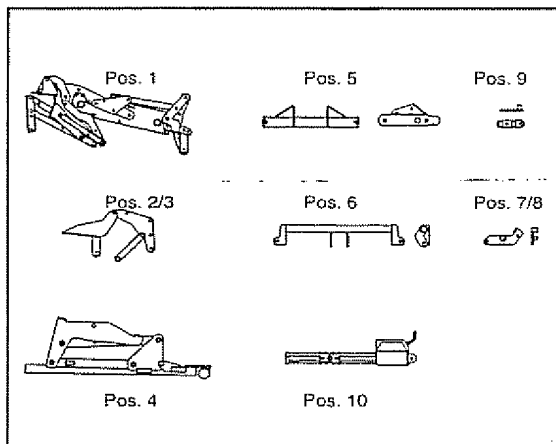


- Pos.1 Chassis komplett
Chassis <=> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <=> Ferrure dos g/d
- Pos.4 Aufstehhilfe komplett
Riser mechanism <=> Mécanisme de releveur
- Pos.5 Traverse-Antrieb komplett
Motor cross bar <=> Traverse moteur
- Pos.6 Traverse-Rücken komplett
Back cross bar <=> Traverse dos
- Pos.7/8 Anschlag komplett links/rechts
Stop l/r <=> Butée g/d
- Pos.9 Hebel komplett
Lever <=> Levier
- Pos.10 FS 1-Antrieb
FS 1-motor <=> Moteur FS 1

Fernsehsesselbeschläge mit Herz-Waage-Positionen
Recliner chair mechanisms with heart-circulation-position
Mécanismes pour fauteuils de relaxation avec position décline


97713

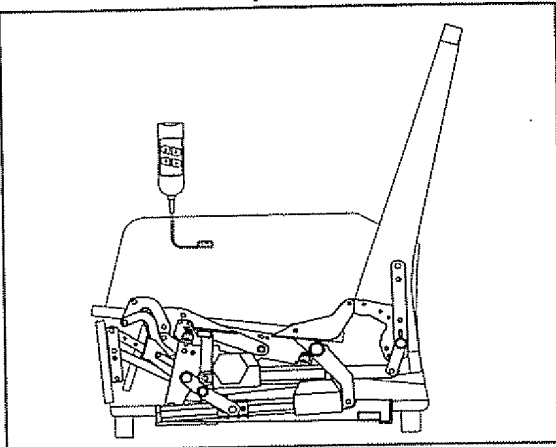



Aufstehhilfe gekoppelt mit Fußklappe und Rücken mit je einem Motor verstellbar, **2-motorig**.



Riser and foot rest operated by one motor and back rest operated by one motor, **2 motors**.



Releveur combiné avec RJ et dossier, réglables par deux moteurs indépendants, **2 moteurs**.

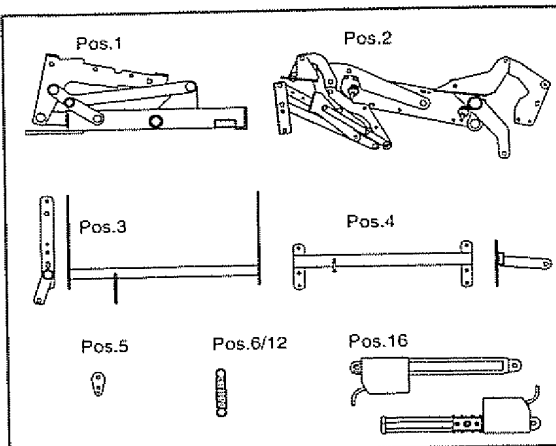



Gew.
25,8 kg

- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2 Chassis komplett
Chassis <> Châssis
- Pos.3 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.4 Traverse-Sitz komplett
Seat cross bar <> Traverse assise
- Pos.5 Federlasche
Spring attachment <> Axe de ressort
- Pos.6/12 Zugfeder
Tension spring <> Ressort de traction
- Pos.16 FS 2-Antrieb
FS 2-motor <> Moteur FS 2

Fernsehsesselbeschlge mit 3 Positionen
Recliner chair mechanisms with 3 positions
Mcanismes pour fauteuils de relaxation avec 3 positions

97850

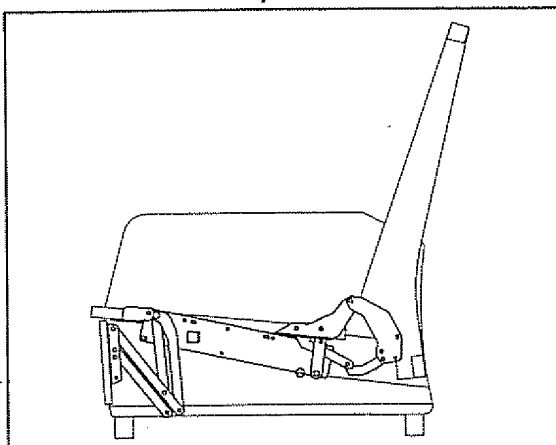



Rcken und Fuklappe **manuell** durch Krperdruck verstellbar.

Manual back and foot rest push-on-arm.

Dos et RJ manuels, rglables par appui du corps.

97660

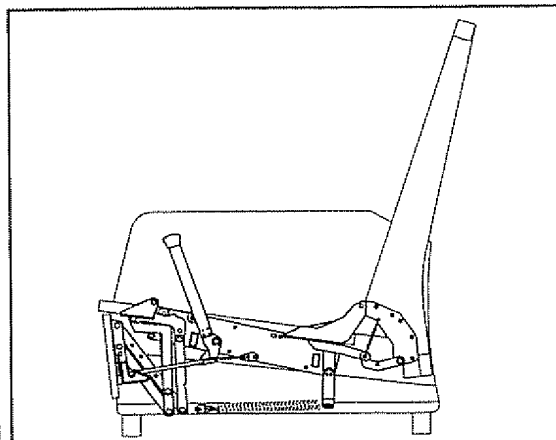


Rcken **manuell** durch Krperdruck verstellbar und Fuklappe mit **Starthilfe**, Innenhebelauslsung.

Manual back and foot rest with starting aid, operated by inside tag.

Dos manuel par appui du corps, RJ avec aide au dmarrage, levier de dclenchement interne.




Gew.
5,6 kg

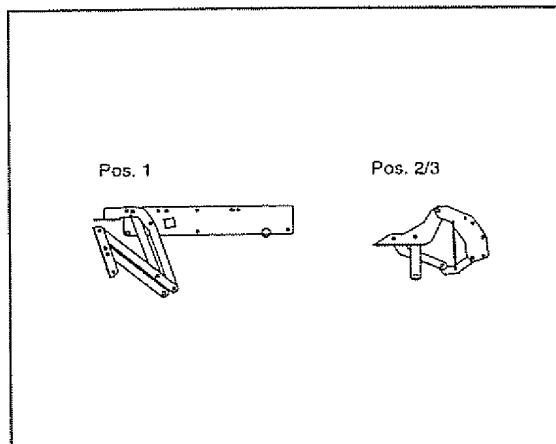

- Pos.1 Chassis komplett
Chassis <=> Chssis
Pos.2/3 Rckenbeschlag komplett links/rechts
Back mechanism l/r <=> Ferrure dos g/d



Gew.
8,0 kg

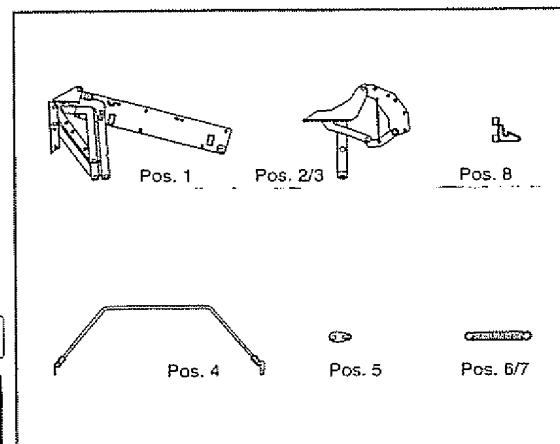


- Pos.1 Chassis komplett
Chassis <=> Chssis
Pos.2/3 Rckenbeschlag komplett links/rechts
Back mechanism l/r <=> Ferrure dos g/d
Pos.4 Starthilfebgel komplett
Starting aid bow <=> Elrier de dclenchement
Pos.5 Federlasche
Spring attachment <=> Axe de ressort
Pos.6/7 Zugfeder
Tension spring <=> Ressort de traction
Pos.8 Kunststoffnger
Plastic catch <=> Crochet de retenue en plastique

Fernsehsesselbeschläge mit 3 Positionen


Recliner chair mechanisms with 3 positions

Mécanismes pour fauteuils de relaxation avec 3 positions

97847



optional

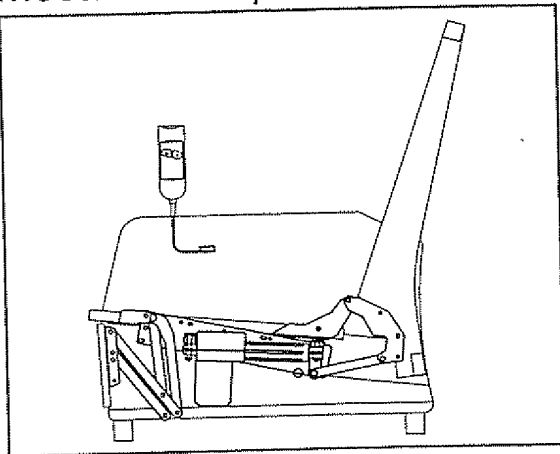


Rücken und Fußklappe mit einem Motor verstellbar,
1-motorig.

Back and foot rest operated together by one motor.

Dos et RJ réglables par un seul moteur.

97637

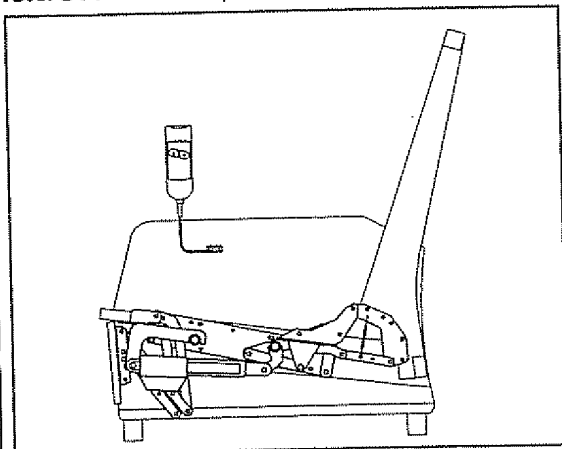


Rücken und Fußklappe mit einem Motor verstellbar,
1-motorig.

Back and foot rest operated together by one motor.

Dos et RJ réglables par un seul moteur.




Gew.
8,2 kg

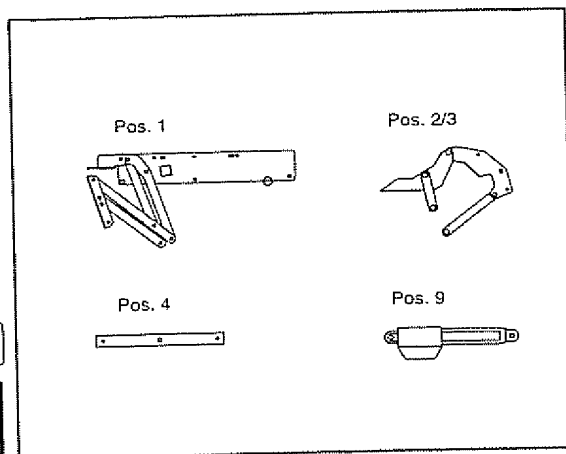

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Sitz
Seat cross bar <> Traverse assise
- Pos.9 FS 1-Antrieb
FS 1-motor <> Moteur FS 1





Gew.
10,5 kg

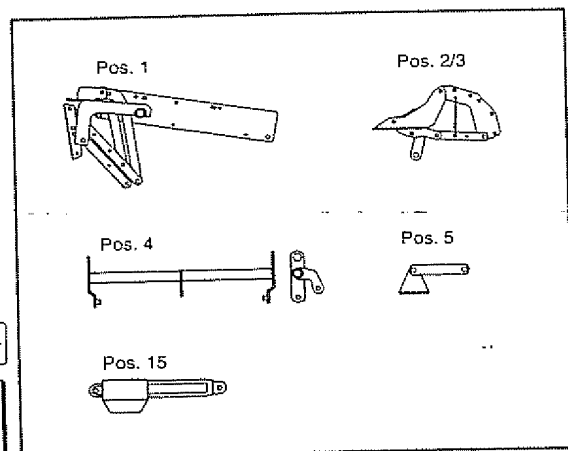

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Antrieb komplett
Motor cross bar <> Traverse moteur
- Pos.5 Gelenk komplett
Hinge <> Articulation
- Pos.15 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge mit 3 Positionen
Recliner chair mechanisms with 3 positions
Mécanismes pour fauteuils de relaxation avec 3 positions

97609

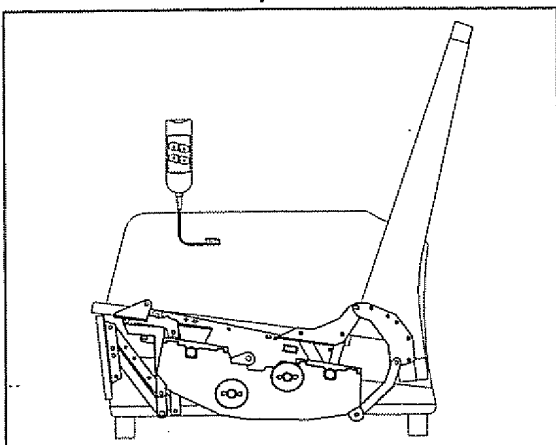



Rücken und Fußklappe mit je einem Motor verstellbar, 2-motorig, Okimat 300.



Back and foot rest each controlled by one motor, 2 motors, Okimat 300.

Dos et RJ réglables par deux moteurs indépendants, 2 moteurs, Okimat 300.

98237

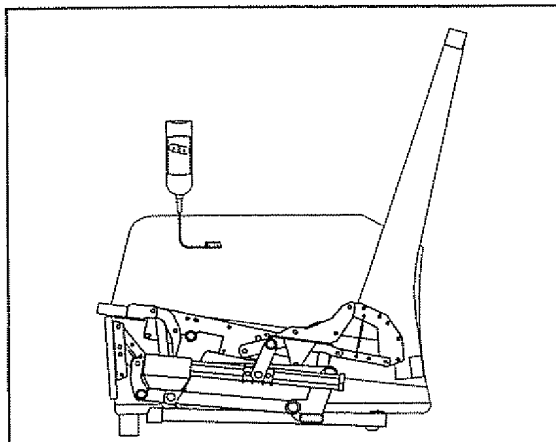

Aufstehhilfe, Rücken und Fußklappe mit einem Motor verstellbar, 1-motorig.




Riser, back and foot rest operated together by one motor.

Releveur, dos et RJ réglables par un seul moteur.




Gew.
13,7 kg

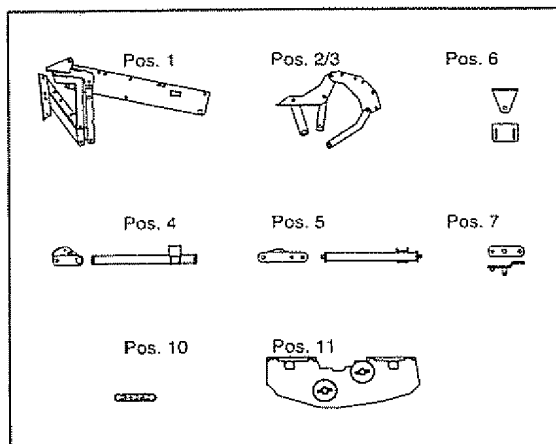

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.5 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.6 Winkel
Angle <> Equerre de fixation
- Pos.7 Hebel komplett
Lever <> Levier
- Pos.10 Zugfeder
Tension spring <> Ressort de traction
- Pos.11 Antrieb Okimat 300
Motor Okimat 300 <> Moteur Okimat 300




Gew.
18,8 kg

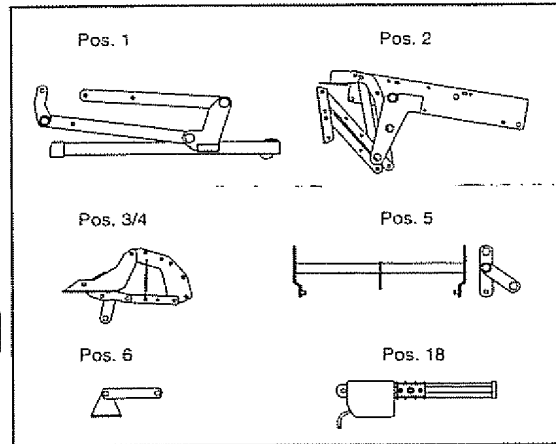

- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2 Chassis komplett
Chassis <> Châssis
- Pos.3/4 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.5 Traverse-Antrieb komplett
Motor cross bar <> Traverse moteur
- Pos.6 Gelenk komplett
Hinge <> Articulation
- Pos.18 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge mit 3 Positionen
Recliner chair mechanisms with 3 positions
Mécanismes pour fauteuils de relaxation avec 3 positions

98287

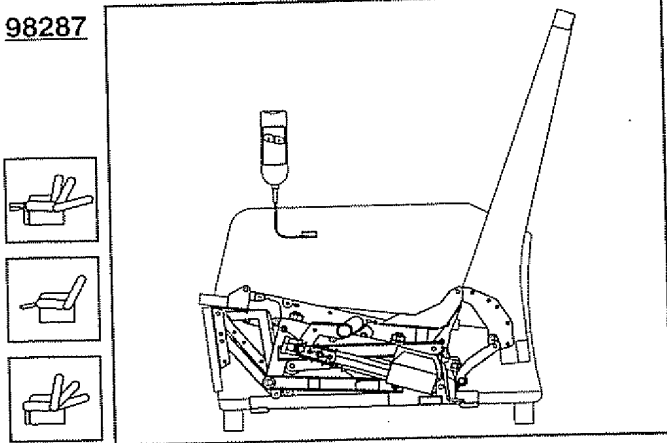


Aufstehhilfe, Rücken und Fußklappe mit einem Motor verstellbar, 1-motorig.

Riser, back and foot rest operated together by one motor.



Releveur, dos et RJ réglables par un seul moteur.

98297

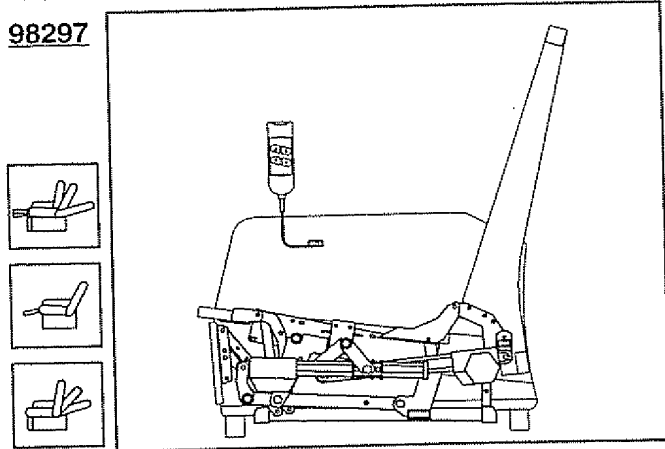


Aufstehhilfe gekoppelt mit Fußklappe und Rücken mit je einem Motor verstellbar, 2-motorig.

Riser and foot rest operated by one motor and back rest operated by one motor, 2 motors.




Releveur combiné avec RJ et dossier, réglables par deux moteurs indépendants, 2 moteurs.

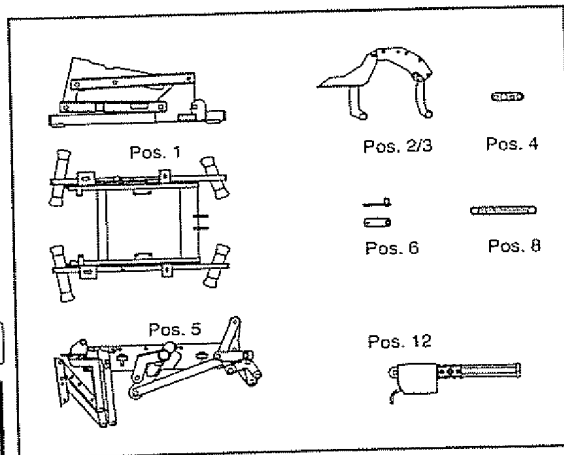

Gew.
25,0 kg

- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Hebel komplett
Lever <> Levier
- Pos.5 Chassis komplett
Chassis <> Châssis
- Pos.6 Lasche komplett
Fish-plate <> Levier
- Pos.8 Zugfeder
tension spring <> Ressort de traction
- Pos.12 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

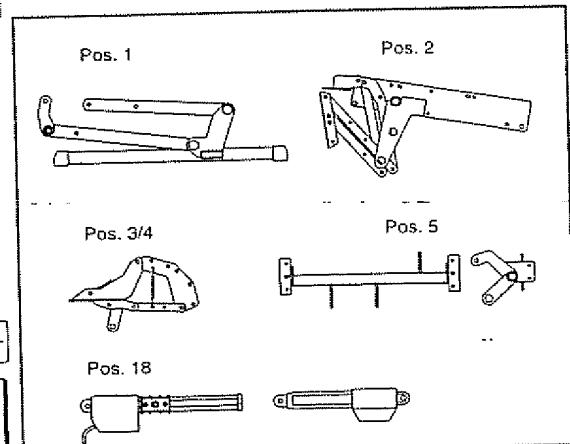

Gew.
26,0 kg



- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2 Chassis komplett
Chassis <> Châssis
- Pos.3/4 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.5 Traverse-Antrieb komplett
Motor cross bar <> Traverse moteur
- Pos.18 FS 2-Antrieb
FS 2-motor <> Moteur FS 2

Fernsehsesselbeschläge mit 3 Positionen

Recliner chair mechanisms with 3 positions

Mécanismes pour fauteuils de relaxation avec 3 positions

99609

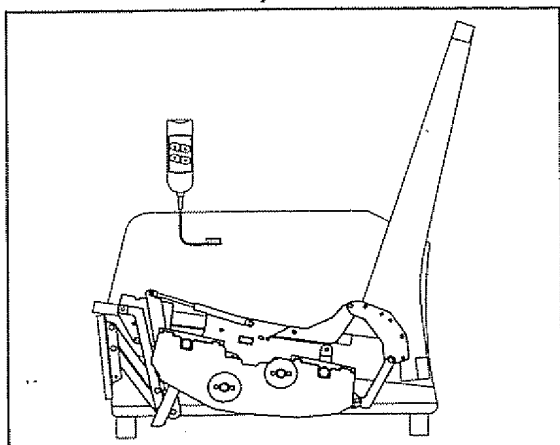

Rücken und Fußklappe mit je einem Motor verstellbar, 2-motorig.



- Hammerkissen geeignet, Okimat 300 -

Back and foot rest each operated by one motor, 2 motors. - suited for T-cushion, Okimat 300 -

Dos et RJ réglables par deux moteurs indépendants, 2 moteurs.

- adapté aux coussins-marteaux, Okimat 300 -

99696

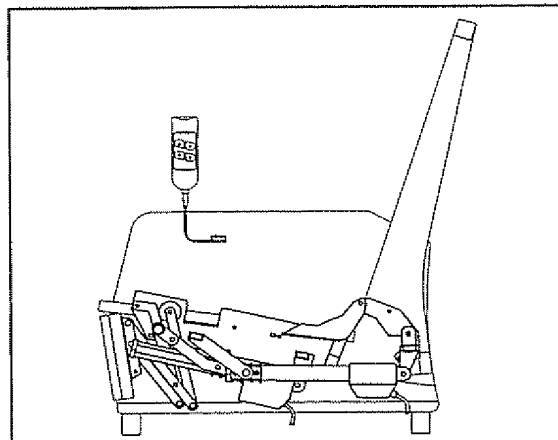

Rücken und Fußklappe mit je einem Motor verstellbar, 2-motorig.

- Hammerkissen geeignet -


Back and foot rest each operated by one motor, 2 motors. - suited for T-cushion -

Dos et RJ réglables par deux moteurs indépendants, 2 moteurs.

- adapté aux coussins-marteaux -




Gew.
15,5 kg

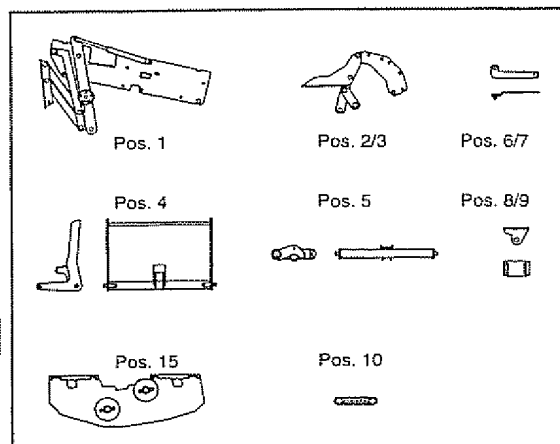

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.5 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.6/7 Hebel komplett
Lever <> Levier
- Pos.8/9 Winkel
Angle <> Equerre de fixation
- Pos.10 Zugfeder
Tension spring <> Ressort de traction
- Pos.15 Antrieb Okimat 300
Motor Okimat 300 <> Moteur Okimat 300




Gew.
14,5 kg

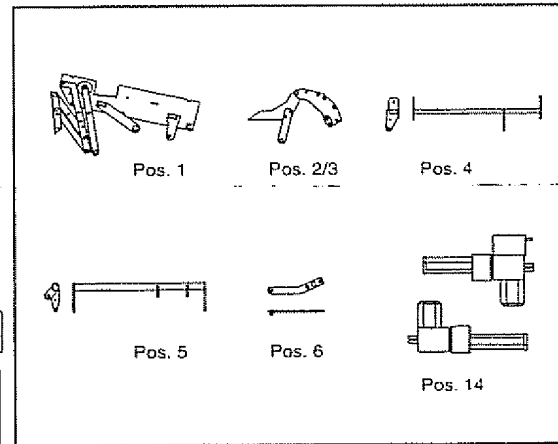

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.5 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.6 Hebel komplett
Lever <> Levier
- Pos.14 FS 2-Antrieb
FS 2-motor <> Moteur FS 2

Fernsehsesselbeschlge mit 3 Positionen
Recliner chair mechanisms with 3 positions
Mcanismes pour fauteuils de relaxation avec 3 positions

99697

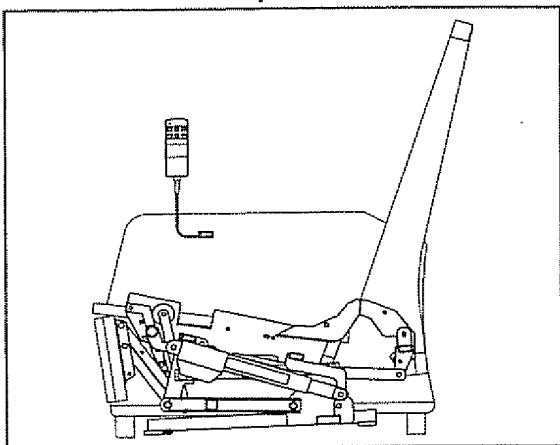

Aufstehhilfe, Rcken und Fuklappe mit je einem Motor verstellbar, **3-motorig**.


- Hammerkissen geeignet -

Riser, back and foot rest each operated by one motor, 3 motors.

- suited for T-cushion -

Releveur, dos et RJ rglables par trois moteurs indpendants, 3 moteurs.

- adapt aux coussins-marteaux -

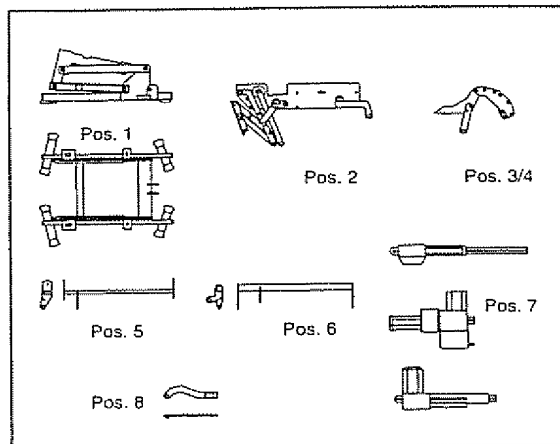

Gew.
23,0 kg



- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mcanisme de releveur
- Pos.2 Chassis komplett
Chassis <> Chssis
- Pos.3/4 Rckenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.5 Traverse-Rcken komplett
Back cross bar <> Traverse dos
- Pos.6 Traverse-Fu komplett
Foot cross bar <> Traverse pieds
- Pos.7 M 3-Antrieb
M 3-motor <> Moteur M 3
- Pos.8 Hebel komplett
Lever <> Levier

Fernsehsesselbeschläge mit 3 Positionen

Recliner chair mechanisms with 3 positions

Mécanismes pour fauteuils de relaxation avec 3 positions

96130

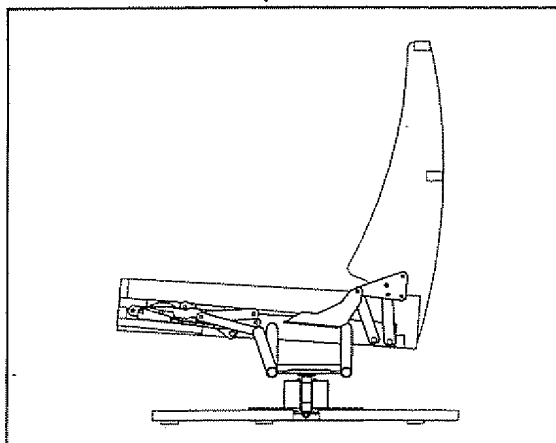

Rücken und Fußklappe **manuell** durch Körperdruck verstellbar und Drehmechanik im Standfuß.


- für bodenfreie Sessel geeignet -

Manual back and foot rest push-on-arm, including swivel-unit in foot part.

- suited for high-leg recliner chairs -

Dos et RJ manuels, réglables par appui du corps, déclenchement par manette intérieure.



- convient aux fauteuils dégagés du sol -

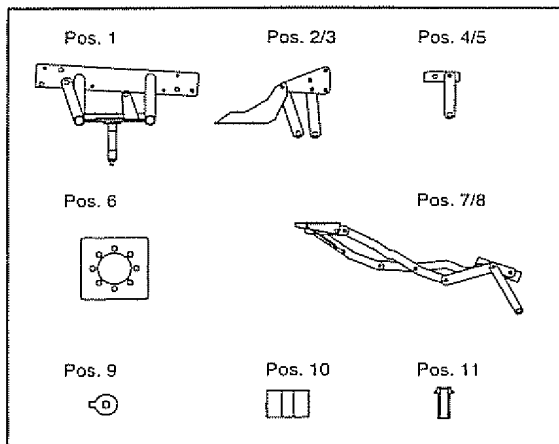

Gew.
14,0 kg

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4/5 Winkel komplett
Angle <> Equerre de connexion
- Pos.6 Platte
Plate <> Plaque de fixation
- Pos.7/8 Fußschere komplett links/rechts
Foot mechanism l/r <> Ferrure de pieds g/d
- Pos.9 Platte
Plate <> Plaque de fixation
- Pos.10 Alu-Profil
Profile <> Profil
- Pos.11 Kunststoffbüchse
Plastic bush <> Douille plastique

96131

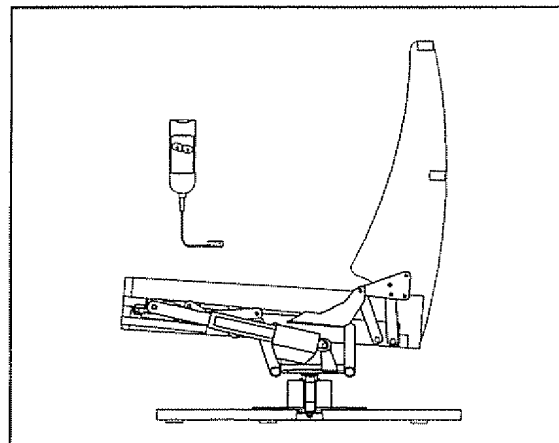

Rücken und Fußklappe mit einem Motor verstellbar, **1-motorig** und Drehmechanik im Standfuß.


- für bodenfreie Sessel geeignet -

Back and foot rest operated together by one motor, including swivel-unit in foot part.

- suited for high-leg recliner chairs -

Dos et RJ réglables par un seul moteur, déclenchement par manette intérieure.

- convient aux fauteuils dégagés du sol -

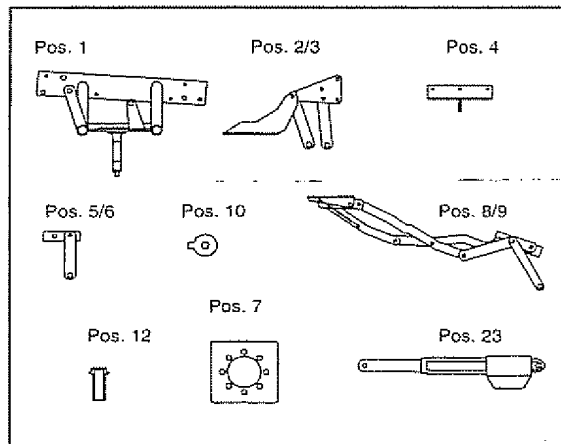


Gew.
16,5 kg

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Motorlasche komplett
Motor attach <> Levier moteur
- Pos.5/6 Winkel komplett
Angle <> Equerre de connexion
- Pos.7 Platte
Plate <> Plaque de fixation
- Pos.8/9 Fußschere komplett links/rechts
Foot mechanism l/r <> Ferrure de pieds g/d
- Pos.10 Platte
Plate <> Plaque de fixation
- Pos.12 Kunststoffbüchse
Plastic bush <> Douille plastique
- Pos.23 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge mit 3 Positionen
Recliner chair mechanisms with 3 positions
Mécanismes pour fauteuils de relaxation avec 3 positions


96132

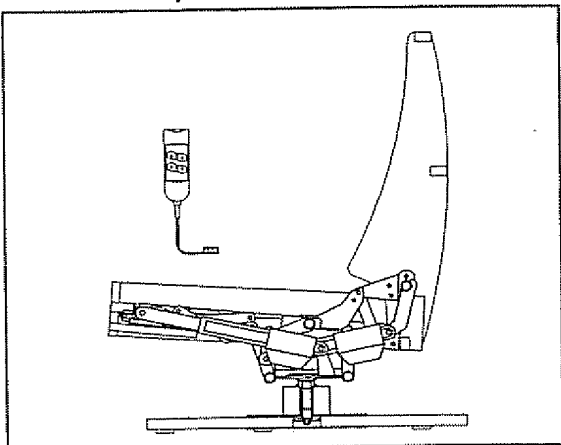

Rücken und Fußklappe mit je einem Motor verstellbar, **2-motorig** und Drehmechanik im Standfuß.
- für bodenfreie Sessel geeignet -

Back and foot rest each operated by one motor, **2 motors**, including swivel-unit in foot part.
- suited for high-leg recliner chairs -


Dos et RJ réglables par deux moteurs indépendants, **2 moteurs**, déclenchement par manette intérieure.
- convient aux fauteuils dégagés du sol -

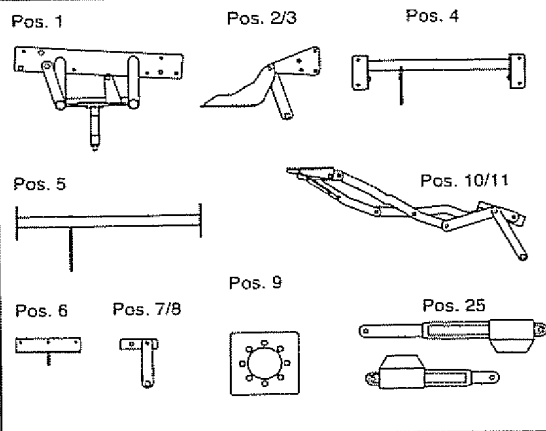

Gew.
18,0 kg

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.4 Traverse-Sitz komplett
Seat cross bar <> Traverse assise
- Pos.5 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.6 Motorflasche komplett
Motor attach <> Levier moteur
- Pos.7/8 Winkel komplett
Angle <> Equerre de connexion
- Pos.9 Platte
Plate <> Plaque de fixation
- Pos.10/11 Fußschere komplett links/rechts
Foot mechanism l/r <> Ferrure de pieds g/d
- Pos.25 FS 2-Antrieb
FS 2-motor <> Moteur FS 2

96133

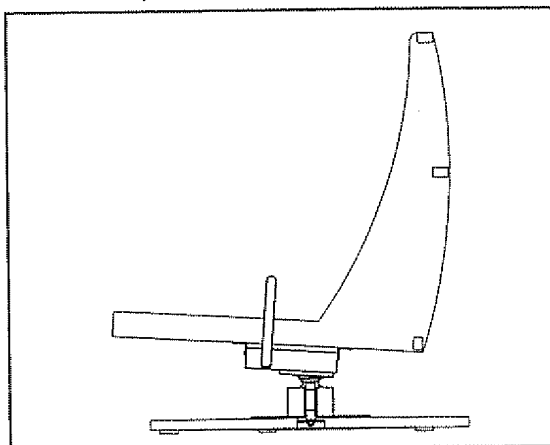


Dreh- und Schaukelmechanik mit Feststellbremse.
- 96134 nur Drehmechanik -

Swivel and rocking mechanism with locking brake.
- 96134 only swivel mechanism -

Mécanisme tournant et à bascule avec système de blocage.

- 96134 mécanisme tournant -

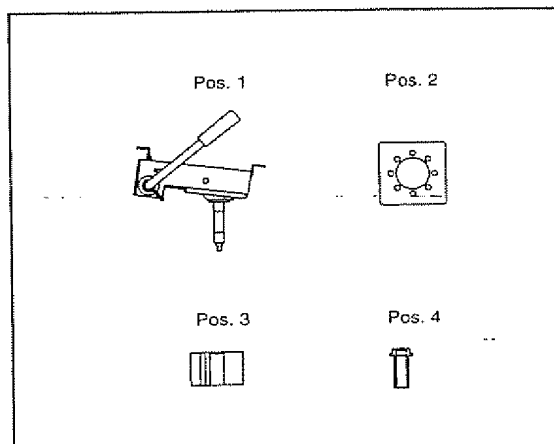

Gew.
7,8 kg


- Pos.1 Dreh- und Schaukeleinheit komplett
Swivel and rocking unit <> Unité tournante et à bascule
- Pos.2 Platte
Plate <> Plaque de fixation
- Pos.3 Alu-Profil
Profile <> Profil
- Pos.4 Kunststoffbuchse
Plastic bush <> Douille plastique

Fernsehsesselbeschläge mit 2 Positionen

Recliner chair mechanisms with 2 positions

Mécanismes pour fauteuils de relaxation avec 2 positions

98475

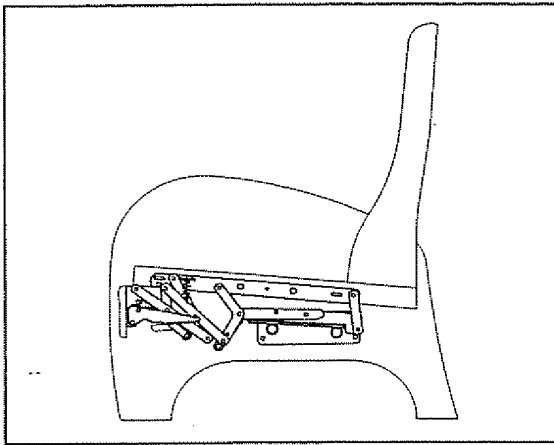


Sitz/Rückeneinheit und Fußklappe **manuell** durch Körperdruck verstellbar. **Optional**, Drehmechanik im Standfuß. - für bodenfreie Sessel geeignet -

Manual seat/back unit and foot rest push-on-arm. Optional extra, swivel-unit in foot part.

- suited for high-leg recliner chairs -


Assise-dossier et RJ à réglage manuel par appui du corps. En option, unité tournante dans partie pieds.
- convient aux fauteuils dégagés du sol -

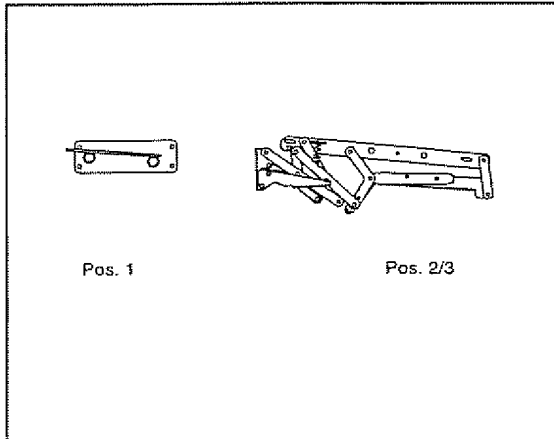

Gew.
6,0 kg

- Pos.1 Chassis komplett
Chassis <> Châssis
Pos.2/3 Sesselbeschlag komplett links/rechts
Mechanism 1/r <> Mécanisme g/d

98477

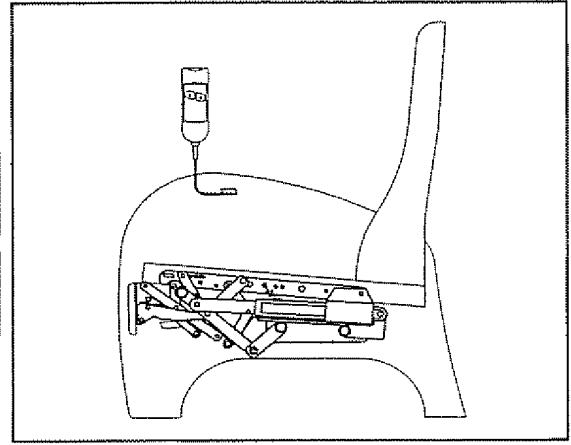


Sitz/Rückeneinheit und Fußklappe mit einem Motor verstellbar, **1-motorig**. **Optional**, Drehmechanik im Standfuß. - für bodenfreie Sessel geeignet -

Seat/back unit and foot rest operated together by one motor. Optional extra, swivel-unit in foot part.

- suited for high-leg recliner chairs -

Ensemble assise/dossier et RJ réglables par un seul moteur. En option, unité tournante dans partie pieds.
- convient aux fauteuils dégagés du sol -

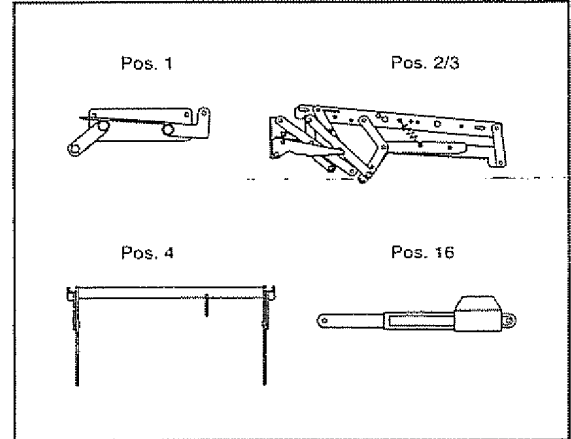

Gew.
10,0 kg


- Pos.1 Chassis komplett
Chassis <> Châssis
Pos.2/3 Sesselbeschlag komplett links/rechts
Mechanism 1/r <> Mécanisme g/d
Pos.4 Traverse-Antrieb komplett
Motor cross bar <> Traverse moteur
Pos.16 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge mit 3 Positionen

Recliner chair mechanisms with 3 positions

Mécanismes pour fauteuils de relaxation avec 3 positions


98478

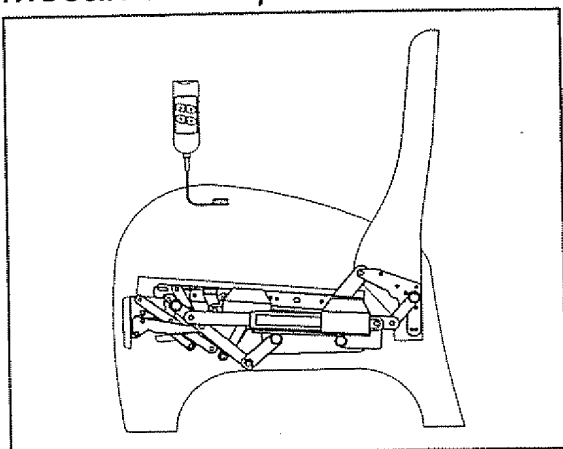

Rücken und Fußklappe mit je einem Motor verstellbar, 2-motorig. Optional, Drehmechanik im Standfuß.
- für bodenfreie Sessel geeignet -

Back and foot rest each operated by one motor, 2 motors. Optional extra, swivel-unit in foot part.
- suited for high-leg recliner chairs -


Dos et RJ réglables par deux moteurs indépendants, 2 moteurs. En option, unité tournante dans partie pieds. - convient aux fauteuils dégagés du sol -

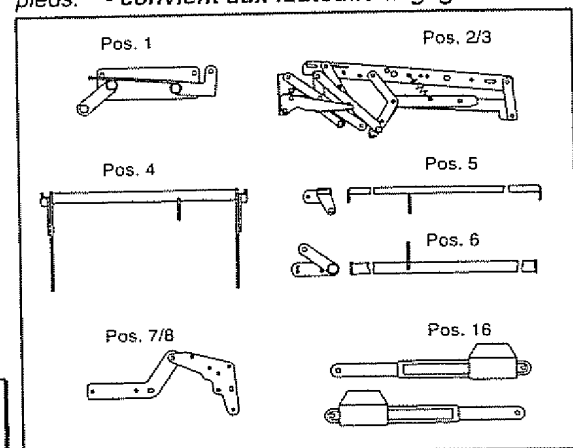

Gew.
14,3 kg

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.2/3 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.4 Traverse-Antrieb komplett
Motor cross bar <> Traverse moteur
- Pos.4 Traverse komplett
Cross bar <> Traverse
- Pos.6 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.7/8 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.16 FS 2-Antrieb
FS 2-motor <> Moteur FS 2


984...

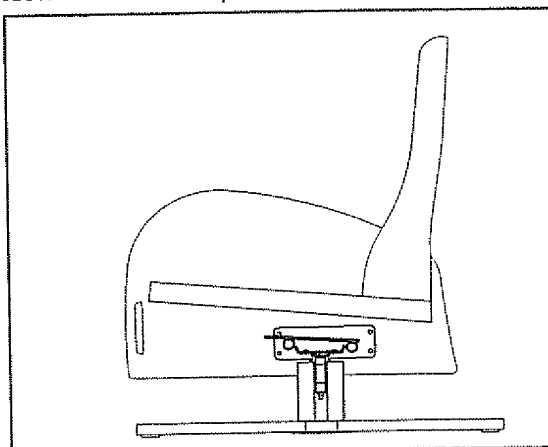

Drehmechanik im Standfuß, optional für Beschlag 98475, 98477 und 98478.

Swivel-unit in foot part, optional for mechanism no. 98475, 98477 and 98478.

Unité tournante dans la partie pieds, en option pour mécanismes no. 98475, 98477 et 98478.


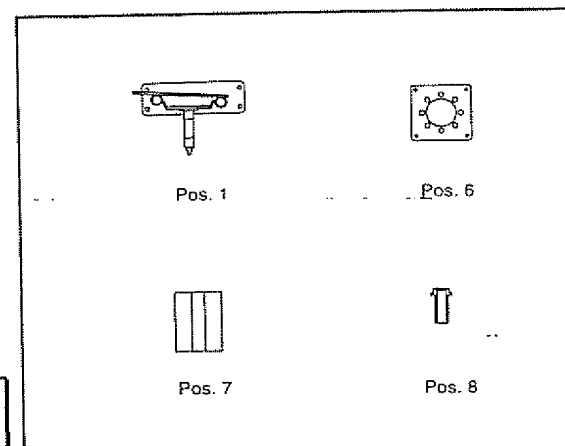


Gew.
Anfr.

- Pos.1 Chassis komplett
Chassis <> Châssis
- Pos.6 Platte
Plate <> Plaque de fixation
- Pos.7 Alu-Profil
Profile <> Profil
- Pos.8 Kunststoffbuchse
Plastic bush <> Douille plastique

Fernsehsesselbeschläge mit 2 Positionen
Recliner chair mechanisms with 2 positions
Mécanismes pour fauteuils de relaxation avec 2 positions


98487

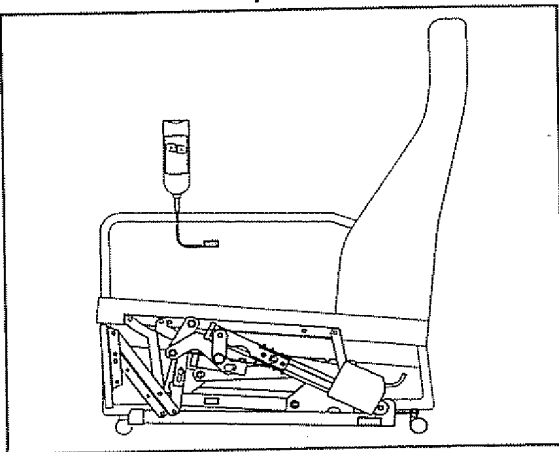

Aufstehhilfe, Sitz/Rückeneinheit u. Fußklappe mit einem Motor verstellbar, 1-motorig.

Riser, seat/back unit and foot rest operated together by one motor.

Releveur, ensemble assise/dossier et RJ réglables par un seul moteur.

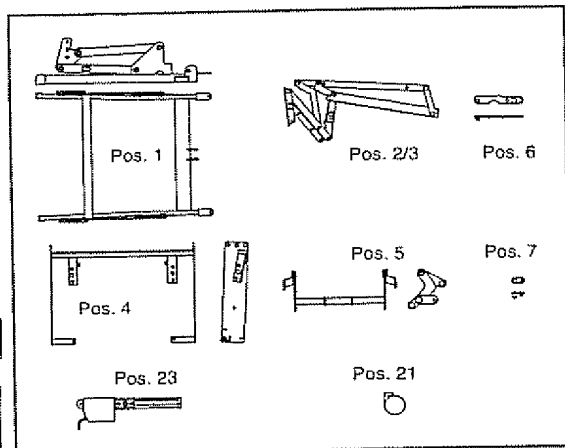

Gew.
16,5 kg


- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2/3 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.4 Chassis komplett
Chassis <> Châssis
- Pos.5 Traverse-Antrieb komplett
Motor cross bar <> Traverse moteur
- Pos.6 Hebel komplett
Lever <> Levier
- Pos.7 Hebel komplett
Lever <> Levier
- Pos.21 Kunststoffrolle
Plastic castor <> Roulette en plastique
- Pos.23 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge Sonderausführung

Recliner chair mechanisms Special versions

Mécanismes pour fauteuils de relaxation Modèles spéciaux

98250

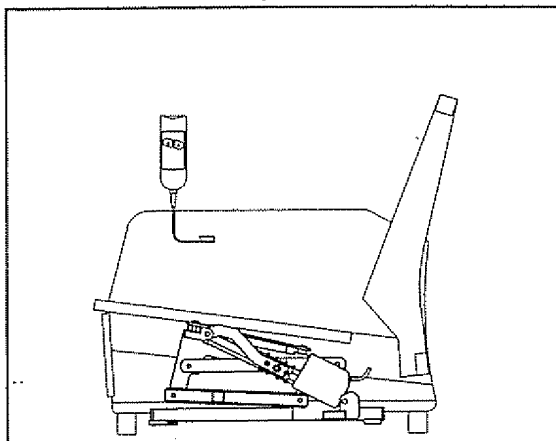


Soloaufstehhilfe mit Motor verstellbar, **1-motorig**. Geeignet für Sessel mit einem Armlehneninnenabstand zwischen 46cm und 59cm.

Riser only, operated by one motor. Suited for chairs with inside dimension between the armrests of 46cm - 59cm.

Releveur motorisé, 1 moteur. Convient aux fauteuils avec largeur d'assise de 46cm à 59cm.

98259

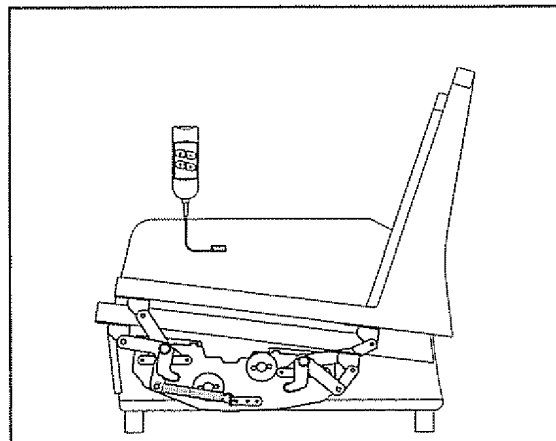

Sitzhöhe vorne und hinten mit je einem Motor verstellbar, **2-motorig**.


- 98260, 3-motorig mit Sitztiefenverstellung -
- 98262, manuell mit Rastung -

Height of seat in the front and in the back each adjustable by one motor, 2 motors.

- 98260, 3 motors w. adjustment of depth of seat -
- 98262, manual with clip-stop -


Avant et arrière de l'assise réglable individuellement par un moteur, 2 moteurs.

- 98260, 3 mot. avec réglage de la profondeur de l'assise -
- 98262, manuel avec crantage -

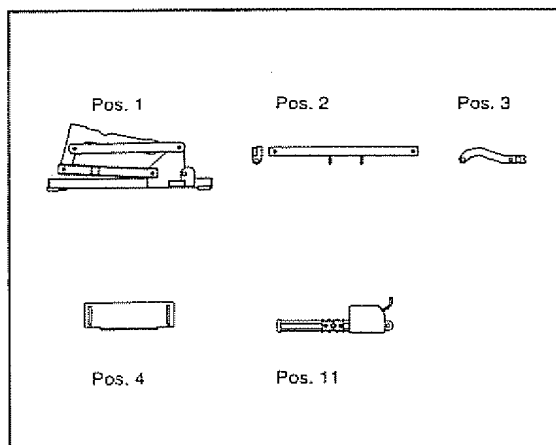

Gew.
15,5 kg

- | | |
|--------|--|
| Pos.1 | Aufstehhilfe komplett
<i>Riser mechanism <> Mécanisme de releveur</i> |
| Pos.2 | Traverse-Sitz komplett
<i>Seat cross bar <> Traverse assise</i> |
| Pos.3 | Hebel komplett
<i>Lever <> Levier</i> |
| Pos.4 | Winkel
<i>Angle <> Equerre</i> |
| Pos.11 | FS 1-Antrieb
<i>FS 1-motor <> Moteur FS 1</i> |

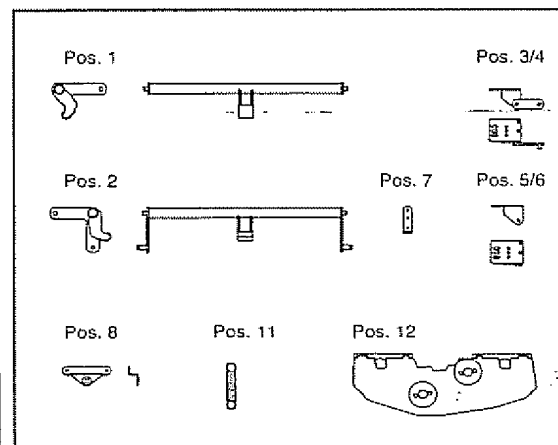



Gew.
7,5 kg

- | | |
|---------|--|
| Pos.1 | Traverse-Rücken komplett
<i>Back cross bar <> Traverse dos</i> |
| Pos.2 | Traverse-Fuß komplett
<i>Foot cross bar <> Traverse pieds</i> |
| Pos.3/4 | Winkel komplett links/rechts
<i>Angle l/r <> Equerre de connexion g/d</i> |
| Pos.5/6 | Winkel links/rechts
<i>Angle l/r <> Equerre de fixation g/d</i> |
| Pos.7 | Winkel
<i>Angle <> Equerre de fixation</i> |
| Pos.8 | Winkel
<i>Angle <> Equerre de fixation</i> |
| Pos.11 | Zugfeder
<i>Tension spring <> Ressort de traction</i> |
| Pos.12 | Antrieb Okimat 300
<i>Motor Okimat 300 <> Moteur Okimat 300</i> |

Fernsehsesselbeschläge Sonderausführung
Recliner chair mechanisms Special versions
Mécanismes pour fauteuils de relaxation Modèles spéciaux

98210


Gesperrt für Deutschland

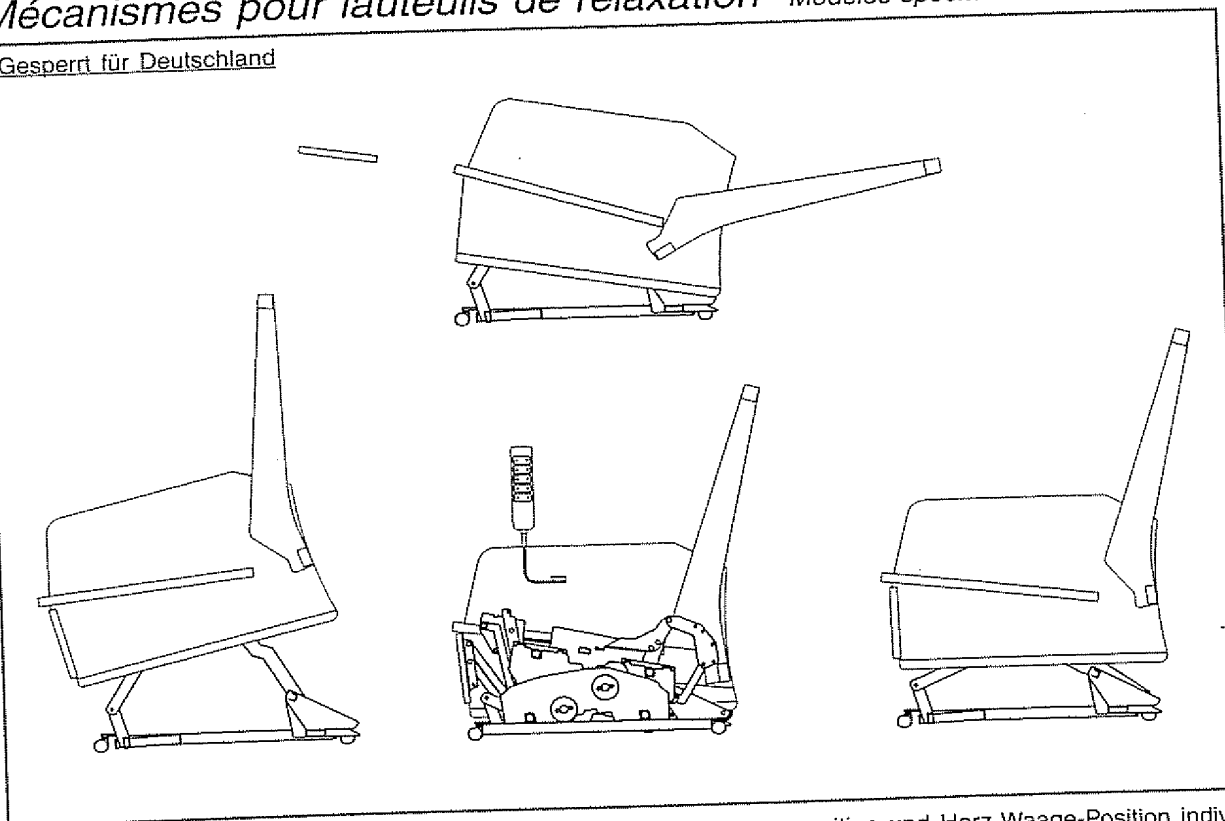

Aufstehhilfeposition, Sitzhöhereinstellung, Rückenposition, Fußklappenposition und Herz-Waage-Position individuell einstellbar, 4 motorig, 2x Okimat 300.
- Hammerkissen geeignet -

Individual adjustment of riser position, height of seat, back position, position of foot rest and heart-circulation position, 4 motors, 2x Okimat 300.
- suited for T-cushion -

Réglage individuel de la position releveur, hauteur du siège, dos, RJ et position décline, 4 moteurs, 2x Okimat 300.
- adapté aux coussins-marteaux -

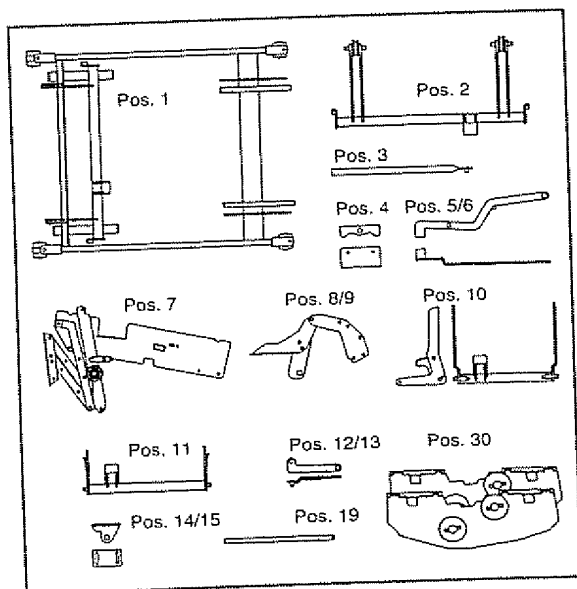

- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2 Traverse komplett
Cross bar <> Traverse
- Pos.3 Rundrohr
Round tube <> Tube rond
- Pos.4 u. 14/15 Winkel
Angle <> Equerre de fixation
- Pos.5/6 Hebel komplett
Lever <> Levier
- Pos.7 Chassis komplett
Chassis <> Châssis
- Pos.8/9 Rückenbeschlag komplett links/rechts
Back mechanism l/r <> Ferrure dos g/d
- Pos.10 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.11 Traverse-Rücken komplett
Back cross bar <> Traverse dos
- Pos.12/13 Hebel komplett
Lever <> Levier
- Pos.19 Achse
axle <> axe
- Pos.30 Antrieb 2x Okimat 300
Motor 2x Okimat 300 <> Moteur 2x Okimat 300


Fernsehsesselbeschläge Sonderausführung
Recliner chair mechanisms Special versions
Mécanismes pour fauteuils de relaxation Modèles spéciaux

98215

NEU




Gew.
32 kg

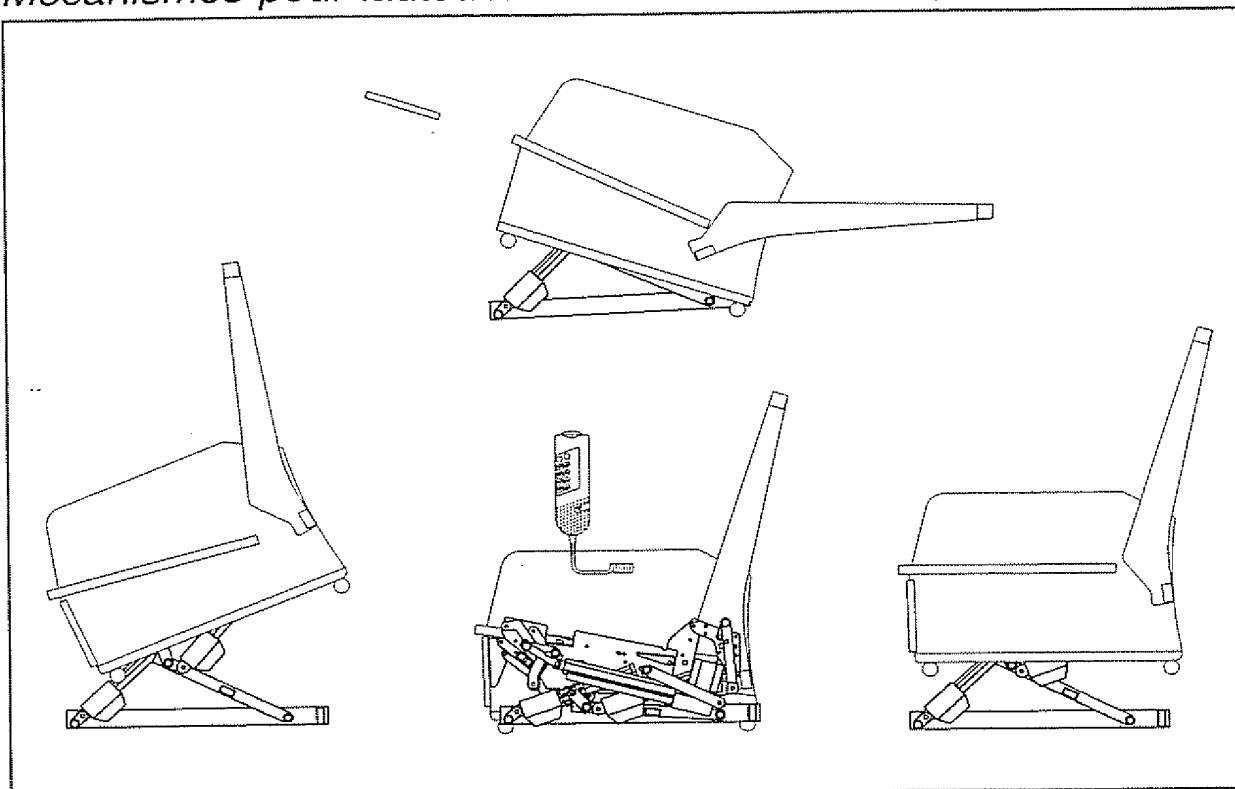

Aufstehhilfeposition, SitzhöhenEinstellung, Rückenposition, Fußklappenposition und Herz-Waage-Position individuell einstellbar, **4 motorig.**
- Hammerkissen geeignet -

Individual adjustment of riser position, height of seat, back position, position of foot rest and heart-circulation position by single motors, **4 motors.**
- suited for T-cushion -



Réglage individuel de la position releveur, hauteur du siège, dos, RJ et position décline par moteurs individuels, **4 moteurs.**
- adapté aux coussins-marteaux -

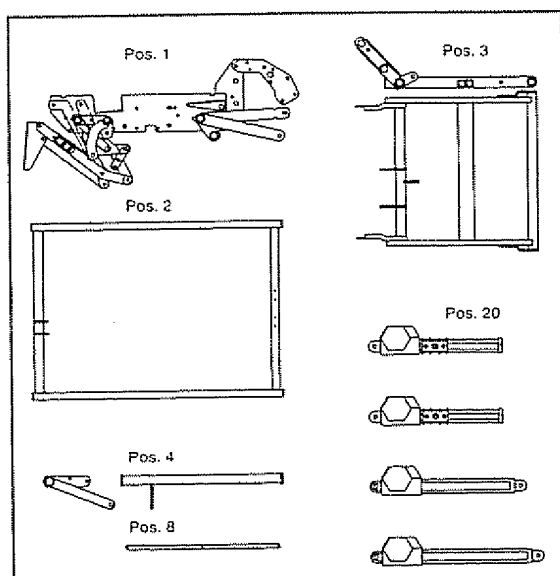

- Pos.1 Chassis komplett
Chassis <=> Châssis
- Pos.2 Aufstehhilfe komplett
Riser mechanism <=> Mécanisme de releveur
- Pos.3 Traverse Aufstehhilfe komplett
Riser cross bar <=> Traverse releveur
- Pos.4 Traverse Rücken komplett
Back cross bar <=> Traverse dos
- Pos.8 Achse
axle <=> axe
- Pos.20 FS 4-Antrieb
FS 4-motor <=> Moteur FS 4

Fernsehsesselbeschläge Sonderausführung
Recliner chair mechanisms Special versions
Mécanismes pour fauteuils de relaxation Modèles spéciaux

91621

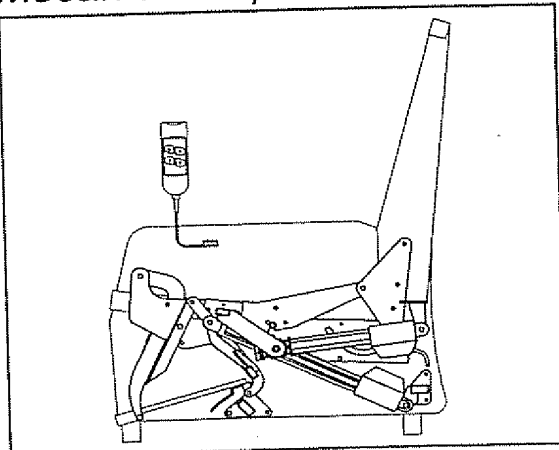



Rücken und Fußklappe mit je einem Motor verstellbar, **2-motorig**. Rückensteuerung über Kunststoffgleitkurve.

Back and foot rest each operated by one motor, **2 motors**. Back function by sliding curve.

Dos et RJ réglables par deux moteurs indépendants, **2 moteurs**. Mouvement du dossier par came de guidage.


91687

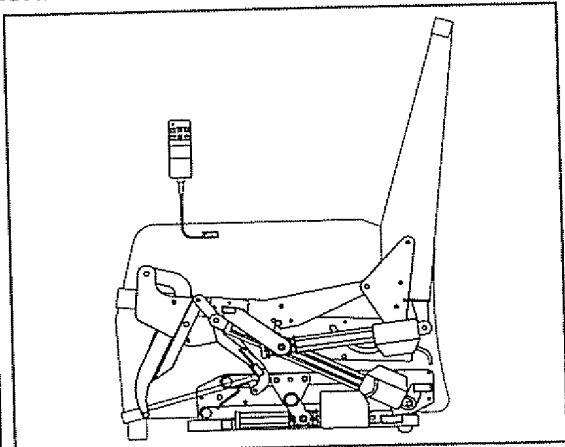

Aufstehhilfe, Rücken und Fußklappe mit je einem Motor verstellbar, **3-motorig**. Rückensteuerung über Kunststoffgleitkurve.


Riser, back and foot rest each operated by one motor, **3 motors**. Back function by sliding curve.

Releveur, dos et RJ réglables par trois moteurs indépendants, **3 moteurs**. Mouvement du dossier par came de guidage.

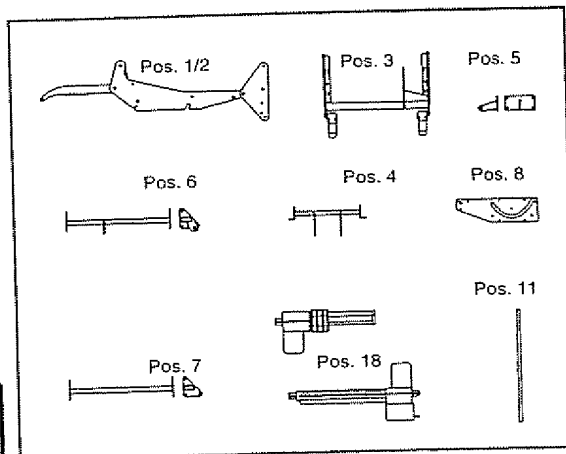

Gew.
14,0 kg

- Pos.1/2 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.3 Fußbeschlag komplett
Foot mechanism <> Ferrure pieds
- Pos.4 Traverse-Sitz komplett
Seat cross bar <> Traverse assise
- Pos.5 Motorlasche komplett
Motor attach <> Levier moteur
- Pos.6 Traverse-Fuß komplett
Foot cross bar <> Traverse pieds
- Pos.7 Traverse komplett
Cross bar <> Traverse
- Pos.8 Kunststoffplatte
Plastic curve plate <> Platine de guidage, plastique
- Pos.11 Rundrohr
Round tube <> Tube rond
- Pos.18 FS 2-Antrieb
FS 2-motor <> Moteur FS 2

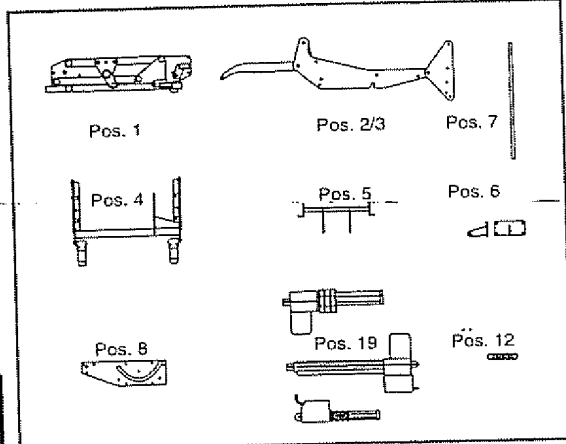

Gew.
24,0 kg


- Pos.1 Aufstehhilfe komplett
Riser mechanism <> Mécanisme de releveur
- Pos.2/3 Sesselbeschlag komplett links/rechts
Mechanism l/r <> Mécanisme g/d
- Pos.4 Fußbeschlag komplett
Foot mechanism <> Ferrure pieds
- Pos.5 Traverse-Sitz komplett
Seat cross bar <> Traverse pieds
- Pos.6 Motorlasche komplett
Motor attach <> Levier moteur
- Pos.7 Rundrohr
Round tube <> Tube rond
- Pos.8 Kunststoffplatte
Plastic curve plate <> Platine de guidage, plastique
- Pos.12 Zugfeder
Tension spring <> Ressort de traction
- Pos.19 FS 3-Antrieb
FS 3-motor <> Moteur FS 3

Fernsehsesselbeschläge Sonderausführung
Recliner chair mechanisms Special versions
Mécanismes pour fauteuils de relaxation Modèles spéciaux

93121

NEU

Gew.
5,0 kg

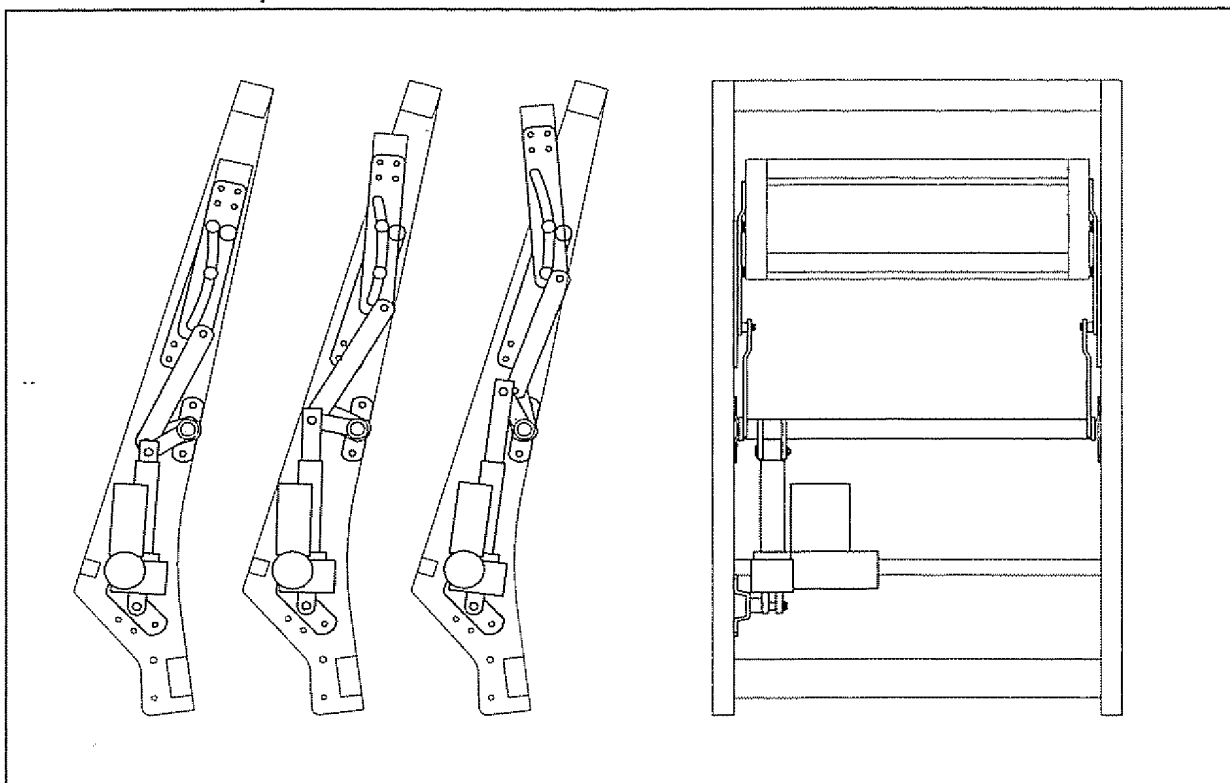

Um 65mm schräg nach vorne schiebende Kopfstütze, optimale Fernseh- und Liegeposition.


- 93121, motorisch verstellbar, **1-motorig** - - 93119, in 4 Stufen von Hand verstellbar, **manuell mit Rastung** -
- 93120, stufenlos von Hand verstellbar, **manuell** - - 93118, mit Rückenbewegung gekoppelt, **automatisch** -

Head rest fitting, 65 mm forward movement, ideal TV and resting position.

- 93121, adjustable by motor, **one motor** - - 93119, manually operated, 4 positions, **manual with click-stop** -
- 93120 infinitely variable, **manual** - - 93118 linked to movement of back, **automatic** -

Ferrure appui-tête, avance de 65 mm, position TV et de repos idéal.

- 93121, réglage par moteur, **un moteur** - - 93119, réglage à la main, **manuel avec crantage** -
- 93120, réglage par degrés, **manuel** - - 93118, relié au mouvement du dossier, **automatique** -

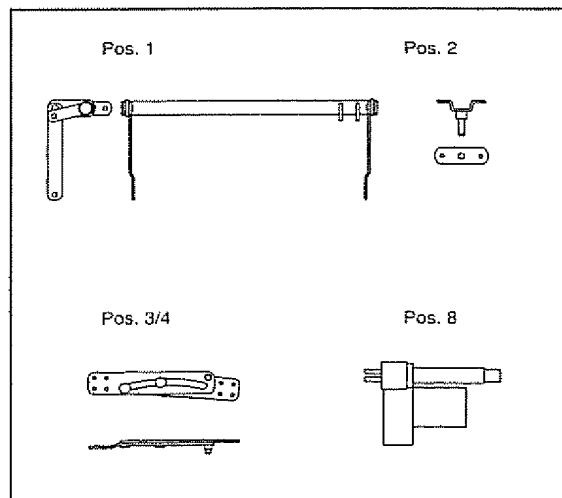


- Pos.1 Traverse Antrieb komplett
Motor cross bar <> Traverse moteur
- Pos.2 Lasche komplett
Fish-plate <> Levier
- Pos.3/4 Gelenk komplett links/rechts
Mechanism l/r <> Articulation g/d
- Pos.8 FS 1-Antrieb
FS 1-motor <> Moteur FS 1

Fernsehsesselbeschläge Zubehör

Recliner chair mechanisms Accessories

Mécanismes pour fauteuils de relaxation Accessoires

95050

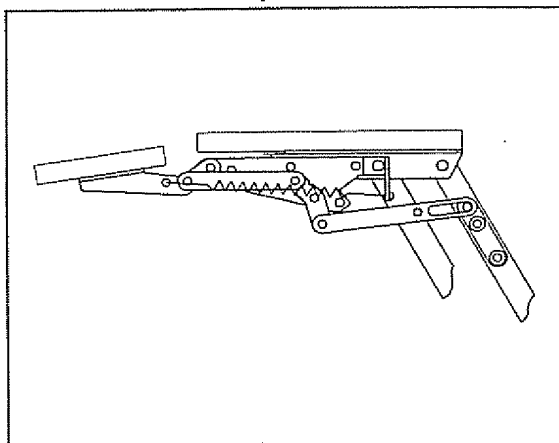


Gew.
0,7 kg

Ausschwenkende Fußklappenverlängerung für die 976... Baureihe (außer Aufstehhilfe), nachträglich montierbar.

Additional small foot rest extension for 976...group (except riser), mountable at a later stage.

Rallonge pivotante repose-jambes pour 976... série (sauf releveur), montable postérieurement.

95082

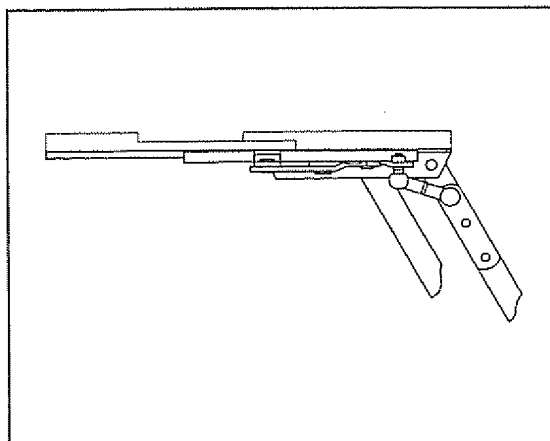

Gew.
1,0 kg

Ausschiebende Fußklappenverlängerung für die 976... Baureihe, nachträglich montierbar.

- 95096 für 996... Baureihe -


Pushing small foot rest extension for 976... group, mountable at a later stage.

- 95096 for 996... group -

Rallonge sortante repose-jambes pour 976... série, montable postérieurement.

- 95096 pour 996... série -

s.Text

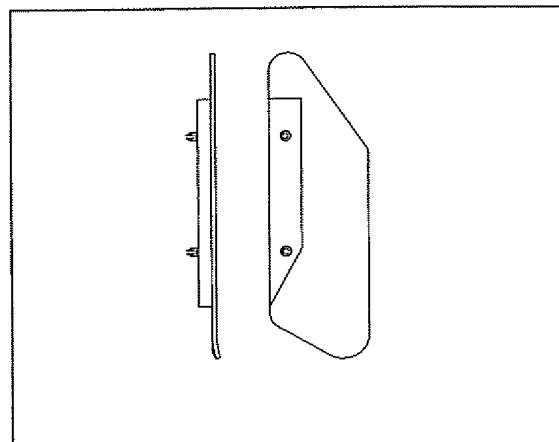


Gew.
0,07 kg

542106.03 Kunststoffsicherheitsabdeckung für alle Fußscheren der 976, 984 und 996... Baureihe.

Plastic security cover for all foot mechanisms of 976, 984 and 996... groups.

Cache de sécurité pour tous les relève-jambes des séries 976, 984 et 996...

s.Text

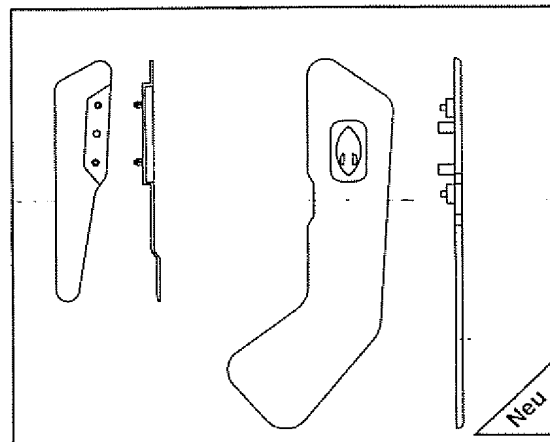

Gew.
0,1 kg

Kunststoffsicherheitsabdeckung für alle Fußscheren der 977... Baureihe.

- 542107, Standard -

- 542054, extra groß -

Plastic security cover for all foot mechanisms of 977... group.

- 542107, standard -


- 542054, extra large -

Cache de sécurité pour tous les relève-jambes de la série 977...

- 542107, standard -


- 542054, très grand -

Stanzwerk exklusiv Akku
Stanzwerk exclusive Battery pack
Stanzwerk exclusif Accumulateur

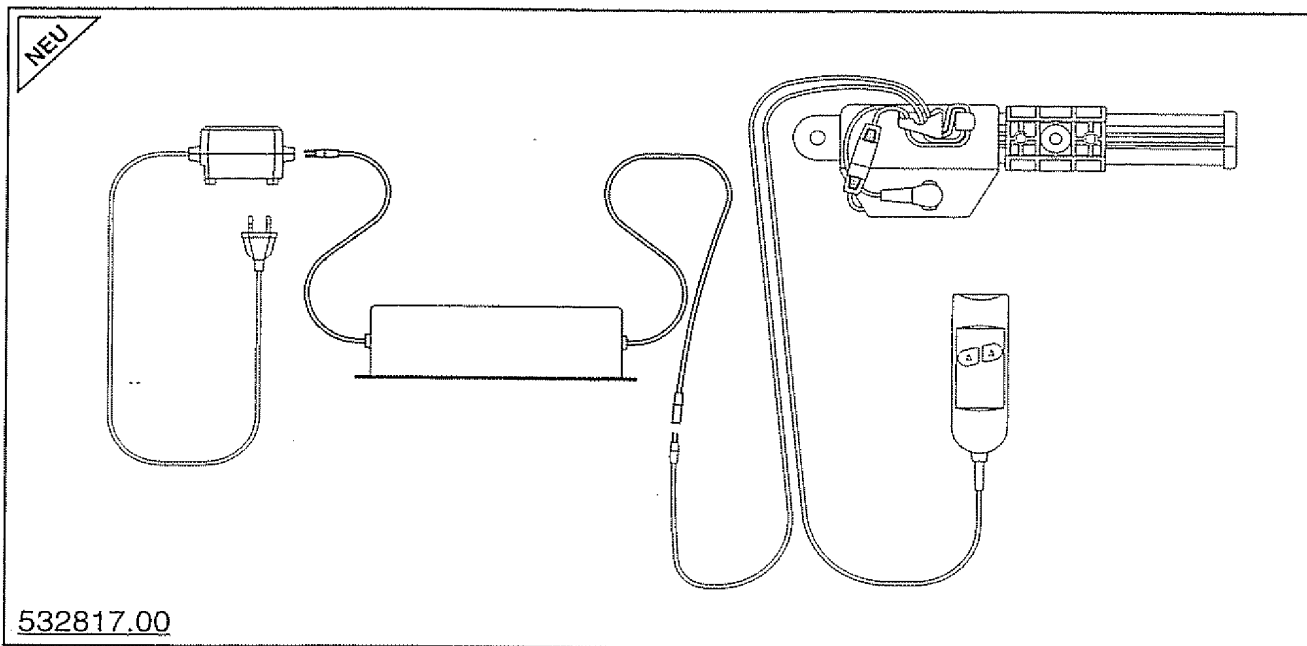

- Kabelloser Betrieb aller unserer motorischen Beschläge.
- Hohe Stromkapazität, dadurch bis zu 200 Verstellzyklen.
- Akku direkt an vorhandene Antriebe anschließbar, Ladung erfolgt über den Standard-Bodentrafo.
- Ca. 180 Ladezyklen, entspricht einer durchschnittlichen Lebensdauer von ca. 5 Jahre.
- Ladeelektronik mit Spannungsüberwachung, Tiefentlade- und Überladungsschutz.
- Permanente Überwachung des Ladezustands, bei Ladebedarf ertönt ein akustisches Signal.
- Eigenentladung 0,1% pro Tag.
- Entwickelt und gefertigt nach EN60335-1.
- Wireless operating of all our motorised mountings.
- High current capacity, up to 200 driving cycles are possible.
- Battery pack can be connected to existing drives, charging with standard external transformer.
- Approx. 180 charging periods, according an ordinary lifetime of 5 years.
- Charge electronic with power-surveillance-device, low power limit switch and overload protection.
- Permanent surveillance of accumulator power, if charging is necessary you will hear a beep.
- Own discharging: 0,1% per day.
- Developed and produced in compliance with EN60335-1 standard.
- Fonctionnement sans fil de tous nos mécanismes motorisés.
- Haute capacité électrique, jusqu'à 200 cycles de fonctionnement possibles.
- L'accumulateur peut être directement connecté aux moteurs, chargement avec transformateur séparé standard.
- Environ 180 cycles de chargement, correspond à une durée de vie d'en moyenne 5 ans.
- Electronique de chargement avec surveillance de la tension, protection en cas de voltage trop faible ou trop forte.
- Surveillance permanente de l'état de chargement, signal acoustique en cas de nécessité de chargement.
- Déchargement hors fonction: 0,1 % par jour.
- Conçu et fabriqué conformément à la norme EU60335-1.

Stanzwerk exclusiv Elektronischer Bodentrafo
Stanzwerk exclusive Electronic powerpack
Stanzwerk exclusif Transformateur électronique séparé

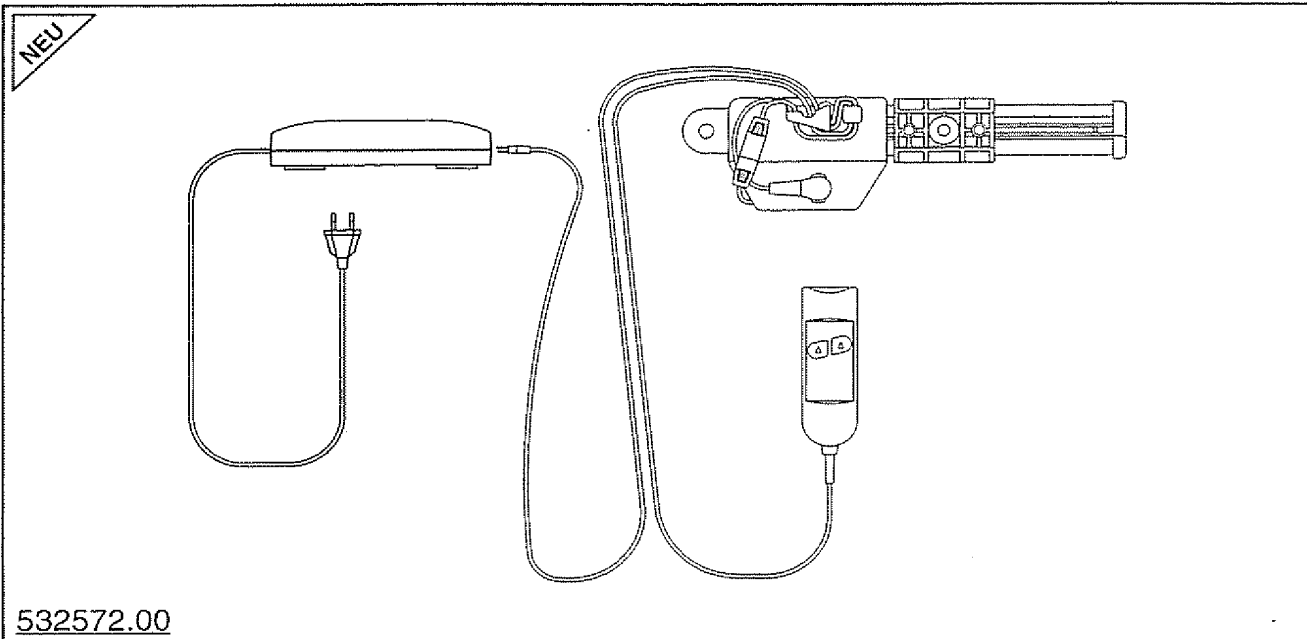


- Verringeretes Gewicht bei höherer Leistung.
- Elektr. Regelung von Strom und Spannung, dadurch annähernd konstante Geschwindigkeit der Antriebe auch bei sehr hoher Belastung.
- Geringere Laufgeräusche durch gleichbleibende Geschwindigkeit auch im Teillastbereich.
- Die Spannung wird beim Anlauf des Antriebes elektronisch Hochgeregelt, dadurch sanfter Motoranlauf.
- Hohe Überlastfähigkeit, geringe Ableitströme und Einhaltung der EMV Vorschriften.
- Thermischer Überlastschutz.
- Einhaltung der Sicherheitsrichtlinien nach Norm IEC 335.
- *Reduced weight while higher guaranteed output.*
- *Control engineering of electricity and voltage, therefore we have an approx. constantly speed of the actuators even if there is a strong burden.*
- *Slight background noise because of constant speed also in case of partly charge.*
- *The voltage is steered automatic higher while the actuator starts - therefore you have a soft start.*
- *High capacity of overload, slight leakage and furthermore meeting the rules of EMV.*
- *Thermal protection.*
- *Keeping safety regulations of ICE 335.*
- *Poids diminue avec plus de puissance.*
- *Réglage du courant et du voltage électronique, de ce fait la vitesse des moteurs est presque constante, même en cas de charge très grande.*
- *Même en cas de charge partielle les bruits de marche sont diminués à cause de vitesse constante.*
- *Réglage électronique du mise en-marche d'entraînement, de ce fait douce mise en marche du moteur.*
- *Haute capacité de surcharge, courants de fuite diminués et respect des instructions EMV.*
- *Protection contre surcharges thermiques.*
- *Respect des directives sécurité après Norme IEC 335.*

Stanzwerk exklusiv Vibrationsmassage

Stanzwerk exclusive Vibrations massage

Stanzwerk exclusif Massage à vibrations

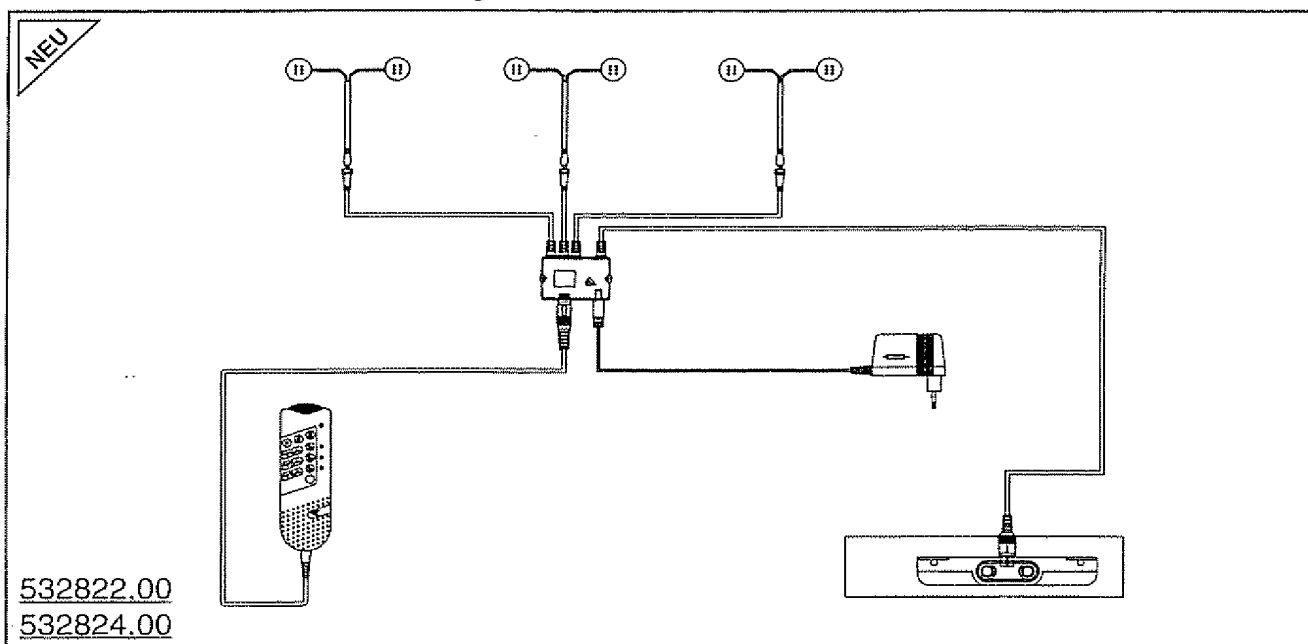


- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • 532822.00: Solo-Massage 532824.00: mit Steuerung für Beschlagsmotore | <ul style="list-style-type: none"> • 532822.00: Massage function only 532824.00: Massage in combination with motorised mechanisms | <ul style="list-style-type: none"> • 532822.00: Fonction massage uniquement 532824.00: Massage combiné avec mécanismes à moteur |
| <ul style="list-style-type: none"> • Speziell geformte Vibrationsmotoren für optimale Massagewirkung. • Verschiedene Massageprogramme steuern Intensität und Reihenfolge der 6-8 Vibrationsmotoren. • Individualprogramm mit Einstellbarkeit der Vibrationsstärke pro Motorenpaar. • Timerfunktion für ca. 10 Minuten Massagelaufzeit. • Hochwertiger Handschalter mit LED - Statusanzeige. • Steuerung der Beschlagsantriebe über gleichen Handschalter. • Multifunktionssteuerung mit Mikroprozessor. • Entwickelt und gefertigt nach EN60335-1. | <ul style="list-style-type: none"> • Specially shaped vibration motors for optimally massage effect. • Different massage programs are guiding strength and sequence of the 6-8 vibration motors. • The strength of each motor pair can be adjusted individually. • Timer function for 10 minutes. • High quality cable handset with LED status display. • Universal handset for the chair and the massage motors. • Multiple function control box with microprocessor. • Developed and produced in compliance with EN60335-1 standard. | <ul style="list-style-type: none"> • Moteurs à vibration de forme spéciale pour un massage optimal. • Différents programmes de massage règlent l'intensité et la séquence des 6 à 8 moteurs à vibrations. • L'intensité de chacune des paires de moteur peut être réglée individuellement. • Fonction de programmation pour une durée de massage de 10 min. • Télécommande de haute qualité avec un affichage LED. • Une seule télécommande à la fois pour les moteurs des mécanismes et pour les moteurs de massage à vibrations. • Boîtier de contrôle multi-fonctions avec micro-processeur. • Conçu et fabriqué conformément à la norme EU60335-1. |

Stanzwerk exklusiv Lordose


Stanzwerk exclusive Support lumbar region

Stanzwerk exclusif Support lombaire

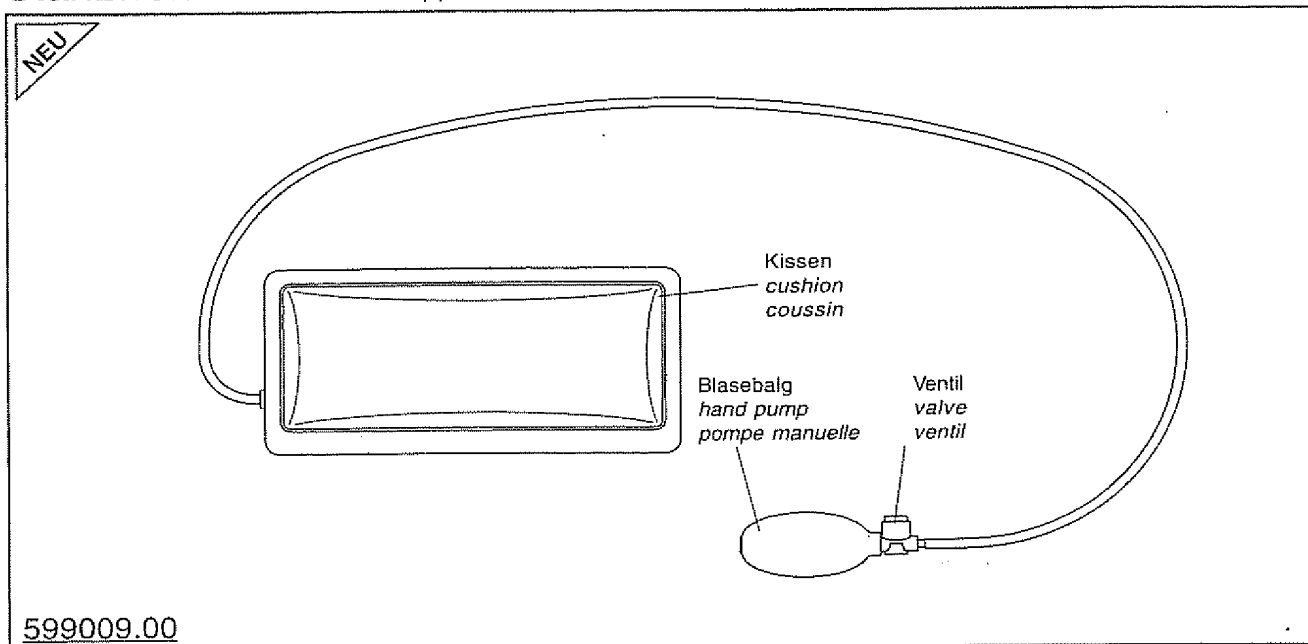

- Einfach zu integrierende Einheit für ein individuelles anatomisches Sitzen in Polstermöbel.
- Unit easy to integrate for an individual and anatomical sitting in the upholstery.
- Unité facile à intégrer pour être assis individuellement et anatomiquement dans des meubles capitonnés/rembourrés.
- Nahezu unzerstörbar.
- Extremely solid.
- Extrêmement solide.
- Der Polsterkomfort bleibt unverändert.
- No influence on the upholstery comfort.
- Le confort reste inchangé.
- Größenveränderung des Lordosekissen über Handpumpe und Entlüftungsventil.
- Individual adjustment of thickness by hand pump.
- Ajustement individuel de l'épaisseur du coussin lombaire par pompe manuelle.

Stanzwerk exklusiv Externer Bodentrafo
Stanzwerk exclusive External powerpack
Stanzwerk exclusif Boîtier d'alimentation externe

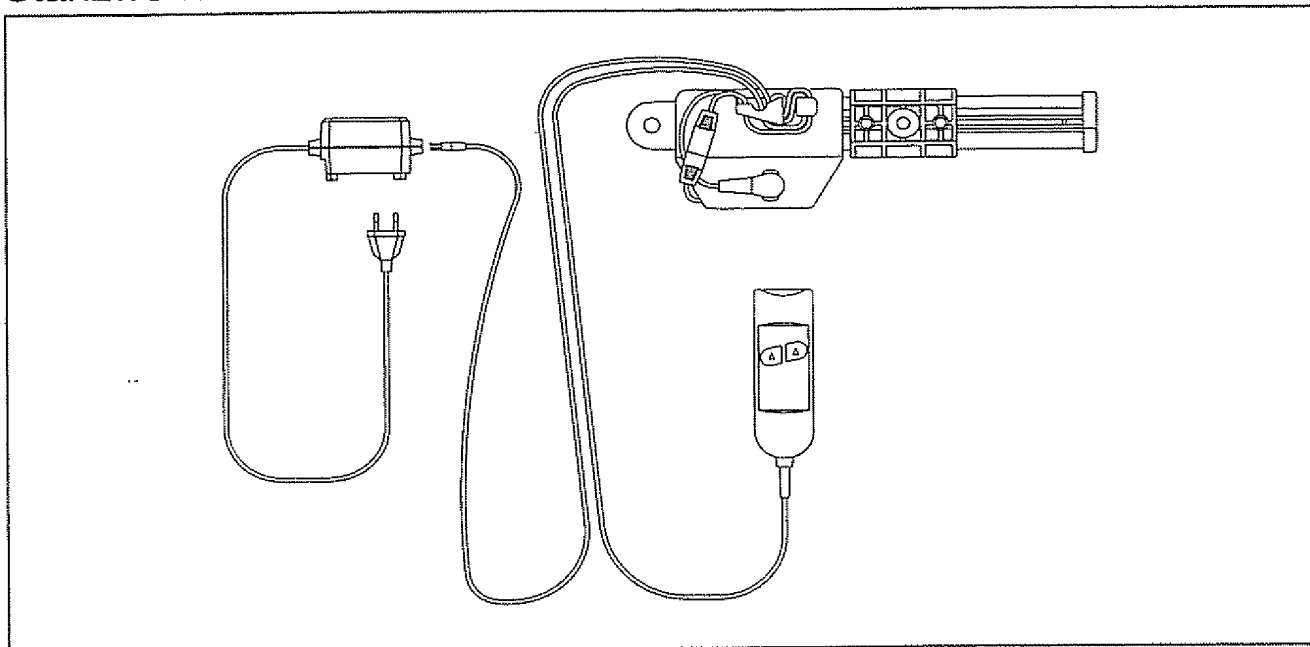


- Wir reduzieren Spannungen.
- Bewährte Stromversorgung unserer Antriebseinheiten durch verbesserten externen Bodentrafo.
- Mehr Sicherheit durch Niedervoltspannung im Sesselbereich.
- Keine elektromagnetischen Abstrahlungen im Sesselbereich.
- Service- und Benutzerfreundlichkeit durch steckbare Zuleitung zwischen Bodentrafo und Motor.
- Anschlußkabel am Bodentrafo aufwickelbar.
- Modern gestalteter Handschalter.
- Gefertigt nach VDE Schutzklasse II.
- We reduce tension.
- Power supply for our motors by improved external powerpack.
- More safety thanks to low voltage for recliner chairs.
- No electromagnetic field.
- Easy to install and handle due to plug-in power supply cable between powerpack and motor.
- Cable winding up device at powerpack.
- Modern styled handset.
- Produced conforming to the protection category II, of the legal security institution VDE.
- Nous réduisons la tension.
- Nouvelle alimentation de nos moteurs grâce à un boîtier d'alimentation externe amélioré.
- Plus de sécurité grâce à la basse tension.
- Pas de champ électromagnétique.
- Maintenance et usage simple par câble enfichable entre boîtier d'alimentation et moteur.
- Boîtier d'alimentation avec possibilité d'enroulement du câble.
- Télécommande moderne.
- Fabriqué conformément à la catégorie de protection II du VDE.

Stanzwerk exklusiv Antrieb Okimat 300

Stanzwerk exclusive Motor Okimat 300

Stanzwerk exclusif Moteur Okimat 300

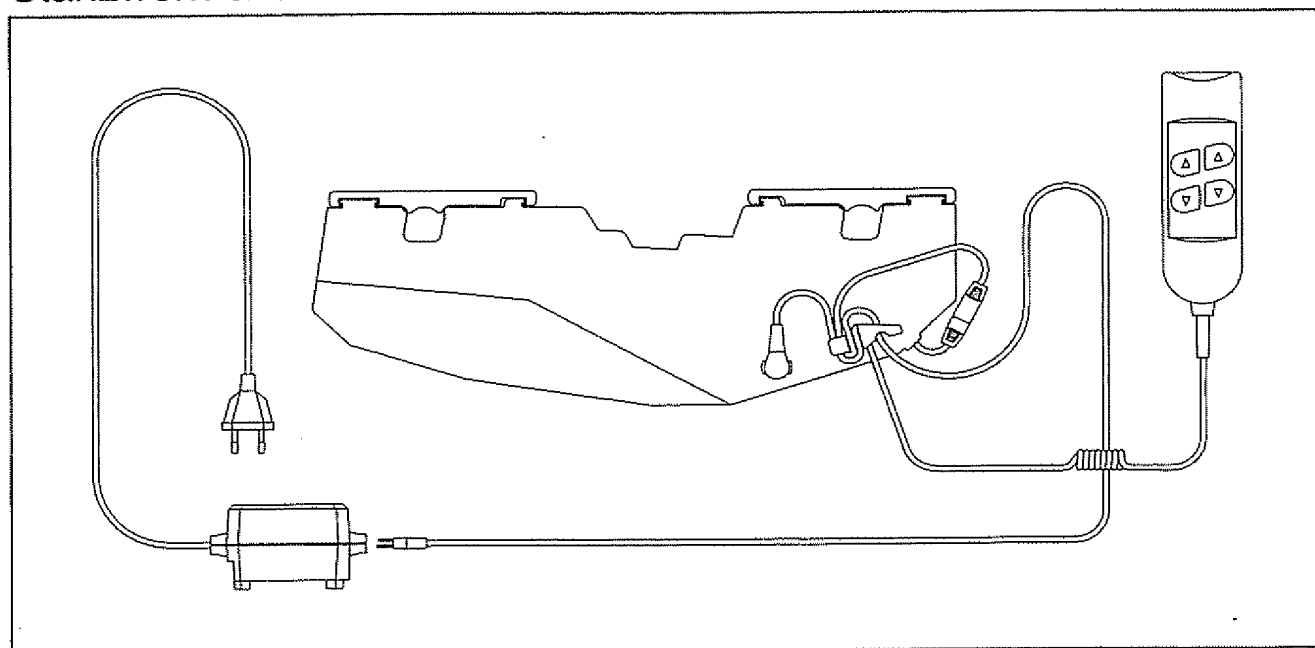

- Doppelantrieb für den Einsatz in Fernsehsesseln.
- Bekanntes und bewährtes Antriebskonzept aus dem Lattenrostbereich.
- Schnelle und einfache Montage.
- Nur Druckmotor, dadurch keine Quetschgefahr beim Schließen der Fußklappe.
- Druckkraft bis maximal 5000N.
- LGA geprüfter Antrieb.
- Gefertigt nach VDE Schutzklasse II, inklusive Netzteil.
- Double motors for recliner chairs.
- Well-known and proved motor concept deriving from bed frame section.
- Fast and simple fitting.
- Motor works on push force only, therefore no risk of trapping while closing of foot rest.
- Push force of up to 5000N max.
- Motor tested by the legal security institution LGA.
- Produced conforming to the protection category II, of the legal security institution VDE.
- Double moteur pour plusieurs sortes de fauteuils.
- Concept de moteur bien connu et éprouvé dérivant du secteur cadres de sommiers.
- Montage rapide et simple.
- Moteur à pression seulement, pas de risque de serrement pendant la fermeture du repose-jambes.
- Force de pression jusqu'à 5000N maximum.
- Testé par LGA (Institution de sécurité).
- Fabriqué conformément à la catégorie de protection II du VDE.

Stanzwerk Wetter

Sichelschmidt GmbH & Co.KG

Oberwengerner Straße 209
D-58300 Wetter, Ruhr

Postfach 4155
D-58294 Wetter, Ruhr

phone D 2335 9797-0
fax D 2335 70797
e-mail info@stawett.de
internet www.stawett.de

Stanzwerk Salzwedel

GmbH & Co.KG

Böddenstedter Weg 22
D-29410 Salzwedel

phone D 3901 8384-0
fax D 3901 422156

BELGIEN
BELGIUM
BELGIQUE
ALFOR
Place J.B. Willems 54, Appt.16
B-1020 Brüssel
phone B 2427 3348
fax B 2425 8664
mobile B 75246717
e-mail veronique.archen@skynet.be

FRANKREICH
FRANCE
FRANCE
FRANK BRUA
1 rue Palissot
Résidence Le Philosophe
F-54000 NANCY
phone F 383 411 561
fax F 383 412 669
e-mail frank.bruea@wanadoo.fr

GROSSBRITANNIEN / Irland
GREAT BRITAIN / Ireland
GRANDE-BRETAGNE / Irlanda
Furniture Components
STEPHEN KETTLEWELL
P.O.BOX 3859
Warfield, Bracknell
Berkshire, RG42 3BA
phone GB 1344 868686
fax GB 1344 423863
mobile GB 07974 752214
e-mail skettlewell@freeuk.com

ITALIEN
ITALY
ITALIE
EUROCOM Sistemi s.n.c.
di A.Favretto & Co.
Via dal Zotto 6
Loc. Campo Bernado
I-31040 Salgareda (TV)
phone I 0422 744432
fax I 0422 804068
mobile I 348 4039981

JAPAN
JAPAN
JAPON
AD Plus Co., Ltd.
P.O.Box 191-0034
2102-5, Ochikawa
Hino-City
J-Tokyo
phone J 42 599 2770
fax J 42 599 2707
e-mail ad-plus@m2.hinocatv.ne.jp

NIEDERLANDE
NETHERLANDS
PAYS-BAS
H.MEINBERG
Technischer Vertrieb
An Schormanns Busch 6
D-32107 Bad Salzulen
phone D 5222 797672
fax D 5222 797673
mobile D 172 2730016

ÖSTERREICH
AUSTRIA
AUTRICHE
Kooperationspartner
HODRY-Metallwarenfabrik
R. Hoppe GmbH & Co.KG
Königstetterstraße 159-161
A-3430 Tulln
phone A 2272 64275
fax A 2272 65275
e-mail hodry@utanet.at

POLEN
POLOGNE
POLAND
Dr. M.RECKNAGEL GmbH
Am Schertzer 4
D-98587 Steinbach-Hallenberg
phone D 36847 4690
fax D 36847 46923
mobile D 170 2778628
e-mail info@m-recknagel.de

SCHWEDEN
SWEDEN
SUEDE
BESLAGS MIX
I Joenköeping AB
Ryhovsgatan 4
S-553 03 Joenköeping
phone S 3618 0270
fax S 3618 0280

SCHWEIZ
SUISSE
SUISSE
PROMETA Entwicklungs- und
Vertriebsgesellschaft mbH
J.-S.-Bach Straße 9
D-96472 Rödental
phone D 9563 721150
fax D 9563 721152
e-mail info@prometa-geisler.de

SPANIEN
SPAIN
ESPAGNE
GERMANY S.A.
Apto. 48
E-08950 Esplugas de LL
(Barcelona)
phone E 9 3724683
fax E 9 7721746
e-mail comercial@oluxengermany.com

DEUTSCHLAND, SÜD
GERMANY, SOUTH
ALLEMAGNE, SUD
PROMETA Entwicklungs- und
Vertriebsgesellschaft mbH
J.-S.-Bach Straße 9
D-96472 Rödental
phone D 9563 721150
fax D 9563 721152
e-mail info@prometa-geisler.de

DEUTSCHLAND, OST
GERMANY, EAST
ALLEMAGNE, EST
Dr. M.RECKNAGEL GmbH
Am Schertzer 4
D-98587 Steinbach-Hallenberg
phone D 36847 4690
fax D 36847 46923
mobile D 170 2778628
e-mail info@m-recknagel.de

DEUTSCHLAND, NORD
GERMANY, NORTH
ALLEMAGNE, NORD
H.MEINBERG
Technischer Vertrieb
An Schormanns Busch 6
D-32107 Bad Salzulen
phone D 5222 797672
fax D 5222 797673
mobile D 172 2730016

Perfektion in der Funktion

Electronic Acknowledgement Receipt

EFS ID:	6449379
Application Number:	12508901
International Application Number:	
Confirmation Number:	8901
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR
First Named Inventor/Applicant Name:	D. Stephen Hoffman
Customer Number:	20792
Filer:	James R. Cannon/Joyce Paoli
Filer Authorized By:	James R. Cannon
Attorney Docket Number:	4362-138IP
Receipt Date:	13-NOV-2009
Filing Date:	24-JUL-2009
Time Stamp:	13:47:45
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no
------------------------	----

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		4362-138IP.pdf	459085 0f9ca9a57d9099b09cb469f7203c2d1a2fb6512b	yes	4

	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Transmittal Letter		1	2	
	Information Disclosure Statement (IDS) Filed (SB/08)		3	4	
Warnings:					
Information:					
2	Foreign Reference	GB2106777.pdf	48617	no	1
			dc24e8217065ba8728f7e3e16a35c87b95f25fe0		
Warnings:					
Information:					
3	NPL Documents	Lusch1.pdf	9301376	no	36
			e6d2c26bbbcd5539000e8eb306f72650d9aa0c99		
Warnings:					
Information:					
4	NPL Documents	Stawett1.pdf	2539110	no	41
			80d8e8ce5a045952a5970ee3f2d231e5fa1037f		
Warnings:					
Information:					
5	NPL Documents	Stawett2.pdf	3036409	no	53
			2d07dd9a5d4fb5475c5ec27f484c30b40f1b11c1		
Warnings:					
Information:					
Total Files Size (in bytes):			15384597		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: D. Stephen Hoffman
Application No.: 12/508,901

Confirmation No. 8901
Examiner: TBA
Group Art Unit: 3636

Filing Date: July 24, 2009

For: Reciprocating Seating Unit with Power Actuator

Date: November 13, 2009

Mail Stop: Amendment
Commissioner for Patents
Box 1450
Alexandria, VA 22313-1450

INFORMATION DISCLOSURE STATEMENT TRANSMITTAL

Sir:

Attached is an Information Disclosure Statement listing of documents, together with a copy of any listed foreign patent document and/or non-patent literature. A copy of any listed U.S. patent and/or U.S. patent application publication is not provided herewith in accordance with 37 C.F.R. § 1.98(a)(2)(ii).

☒ In accordance with **37 CFR 1.97(b)**, the information disclosure statement is being filed:

- ☐ (1) within three months of the filing date of a national application other than a continued prosecution application under §1.53(d);
- ☐ (2) within three months of the date of entry of the national stage as set forth in §1.491 in an international application;
- ☒ (3) before the mailing of a first Office Action on the merits; or
- ☐ (4) before the mailing of a first Office Action after the filing of a request for continued examination under §1.114.

☐ In accordance with **37 CFR 1.97(c)**, the information disclosure statement is being filed after the period specified in 37 CFR 1.97(b) above, but before the mailing date of any of a final action under §1.113, a notice of allowance under §1.311, or an action that otherwise closes prosecution in the application, and is accompanied by one of the following:

☐ (1) The statement specified under **37 CFR 1.97(e)**, as follows:

☐ Each item of information contained in the information disclosure statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of the information disclosure statement; or

☐ No item of information contained in the information disclosure statement was cited in a communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the person signing the certification after making reasonable inquiry, no item of information contained in the information disclosure statement was known to any individual designated in §1.56(c) more than three months prior to the filing of the information disclosure statement; or

☐ (2) The fee set forth in §1.17(p);

☐ In accordance with **37 CFR 1.97(d)**, the information disclosure statement is being filed after the period specified in 37 CFR 1.97(c) above, but on or before payment of the issue fee, and is accompanied by **both** of the following:

☐ (1) The statement specified under **37 CFR 1.97(e)**, as follows:

☐ That each item of information contained in the information disclosure statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of the information disclosure statement; **or**

☐ That no item of information contained in the information disclosure statement was cited in a communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the person signing the certification after making reasonable inquiry, no item of information contained in the information disclosure statement was known to any individual designated in §1.56(c) more than three months prior to the filing of the information disclosure statement; **and**

☐ (2) The fee set forth in §1.17(p);


In accordance with **37 CFR 1.97(g)**, the information disclosure statement shall not be construed as a representation that a search has been made.

In accordance with **37 CFR 1.97(h)**, the information disclosure statement shall not be construed to be an admission that the information cited in the statement is, or is considered to be, material to patentability as defined in §1.56(b).

☐ The Director is hereby authorized to charge the fee specified in 37 C.F.R. § 1.17(p), and any fee deficiency or credit any overpayment, to Deposit Account No. 50-0220; **or**

☒ No fee is believed due. However, the Director is hereby authorized to charge any deficiency or credit any overpayment to Deposit Account No. 50-0220.

Respectfully submitted,

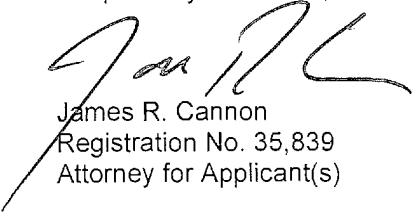

James R. Cannon
Registration No. 35,839
Attorney for Applicant(s)

Customer Number 20792

Myers Bigel Sibley & Sajovec, P.A.
P.O. Box 37428, Raleigh, NC 27627
919-854-1400
919-854-1401 (Fax)

CERTIFICATION OF TRANSMISSION

I hereby certify that this correspondence is being transmitted via the Office electronic filing system in accordance with § 1.6(a)(4) to the U.S. Patent and Trademark Office on November 13, 2009.


Name: Joyce Paoli



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
12/508,901	07/24/2009	D. Stephen Hoffman	4362-138IP

CONFIRMATION NO. 8901

PUBLICATION NOTICE



OC000000041826744

20792
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

Title:RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

Publication No.US-2010-0127556-A1

Publication Date:05/27/2010

NOTICE OF PUBLICATION OF APPLICATION

The above-identified application will be electronically published as a patent application publication pursuant to 37 CFR 1.211, et seq. The patent application publication number and publication date are set forth above.

The publication may be accessed through the USPTO's publically available Searchable Databases via the Internet at www.uspto.gov. The direct link to access the publication is currently <http://www.uspto.gov/patft/>.

The publication process established by the Office does not provide for mailing a copy of the publication to applicant. A copy of the publication may be obtained from the Office upon payment of the appropriate fee set forth in 37 CFR 1.19(a)(1). Orders for copies of patent application publications are handled by the USPTO's Office of Public Records. The Office of Public Records can be reached by telephone at (703) 308-9726 or (800) 972-6382, by facsimile at (703) 305-8759, by mail addressed to the United States Patent and Trademark Office, Office of Public Records, Alexandria, VA 22313-1450 or via the Internet.

In addition, information on the status of the application, including the mailing date of Office actions and the dates of receipt of correspondence filed in the Office, may also be accessed via the Internet through the Patent Electronic Business Center at www.uspto.gov using the public side of the Patent Application Information and Retrieval (PAIR) system. The direct link to access this status information is currently <http://pair.uspto.gov/>. Prior to publication, such status information is confidential and may only be obtained by applicant using the private side of PAIR.

Further assistance in electronically accessing the publication, or about PAIR, is available by calling the Patent Electronic Business Center at 1-866-217-9197.

Office of Data Management, Application Assistance Unit (571) 272-4000, or (571) 272-4200, or 1-888-786-0101



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
-----------------	-------------	----------------------	---------------------	------------------

12/508,901

07/24/2009

D. Stephen Hoffman

4362-138IP

8901

20792 7590 04/19/2011
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

EXAMINER

NELSON JR, MILTON

ART UNIT

PAPER NUMBER

3636

MAIL DATE

DELIVERY MODE

04/19/2011

PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Office Action Summary	Application No. 12/508,901	Applicant(s) HOFFMAN ET AL.	
	Examiner Milton Nelson, Jr.	Art Unit 3636	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☐ Responsive to communication(s) filed on ____.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-15 is/are pending in the application.
- 4a) Of the above claim(s) ____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) ____ is/are allowed.
- 6) ☒ Claim(s) 1-15 is/are rejected.
- 7) ☐ Claim(s) ____ is/are objected to.
- 8) ☐ Claim(s) ____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☒ The drawing(s) filed on 24 July 2009 is/are: a) ☒ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some * c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. ____.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

* See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- | | |
|--|---|
| 1) ☒ Notice of References Cited (PTO-892) | 4) ☐ Interview Summary (PTO-413) |
| 2) ☐ Notice of Draftperson's Patent Drawing Review (PTO-948) | Paper No(s)/Mail Date. ____. |
| 3) ☒ Information Disclosure Statement(s) (PTO/SB/08) | 5) ☐ Notice of Informal Patent Application |
| Paper No(s)/Mail Date <u>11/13/09</u> . | 6) ☐ Other: ____. |

DETAILED ACTION

Information Disclosure Statement

The information referred to in the IDS filed November 13, 2009 has been considered.

Drawings

The drawings filed July 24, 2009 are approved.

Claim Rejections - 35 USC § 112

The following is a quotation of the second paragraph of 35 U.S.C. 112:

The specification shall conclude with one or more claims particularly pointing out and distinctly claiming the subject matter which the applicant regards as his invention.

Claims 1-15 are rejected under 35 U.S.C. 112, second paragraph, as being indefinite for failing to particularly point out and distinctly claim the subject matter which applicant regards as the invention.

In line 3 of claim 1, it is unclear if "the base" is intended to be the same features as the previously set forth "base unit". Similarly note line 4 of claim 1.

In line 14 of claim 1, "the chair" lacks proper antecedent basis.

In line 15 of claim 1, it appears that "are" should be "is".

In line 3 of claim 13, it is unclear if "the base" is intended to be the same features as the previously set forth "base unit". Similarly note line 4 of claim 13.

In line 16 of claim 13, it appears that "are" should be "is".

In line 3 of claim 14, "the axis" lacks proper antecedent basis.

In line 3 of claim 14, it is unclear if "the extendable member" is intended to be the same structure as the previously set forth "extendable rod".

The remaining claims are indefinite since each depends from an indefinite claim.

Allowable Subject Matter

Claims 2-12, 14 and 15 would be allowable if rewritten to overcome the rejection(s) under 35 U.S.C. 112, 2nd paragraph, set forth in this Office action and to include all of the limitations of the base claim and any intervening claims.

Claims 1 and 13 would be allowable if rewritten or amended to overcome the rejection(s) under 35 U.S.C. 112, 2nd paragraph, set forth in this Office action.

Conclusion

The prior art made of record and not relied upon is considered pertinent to applicant's disclosure. Hughes (3016264) shows a motor operated recliner. Hesse (6840575) shows a motor operated recliner. LaPointe et al (6893085) shows a powered drive mechanism for a recliner.

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Milton Nelson, Jr. whose telephone number is (571) 272-6861. The examiner can normally be reached on Mon-Thurs, and alternate Fridays, 5:30-3:00 EST.

Art Unit: 3636

The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

/Milton Nelson, Jr./
Primary Examiner, Art Unit 3636

mn
April 17, 2011

Notice of References Cited	Application/Control No. 12/508,901		Applicant(s)/Patent Under Reexamination HOFFMAN ET AL.	
	Examiner Milton Nelson, Jr.		Art Unit 3636	Page 1 of 1

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	Classification
*	A	US-6,893,085	05-2005	LaPointe et al.	297/85M
*	B	US-6,840,575	01-2005	Hesse, Detlef	297/85M
*	C	US-3,016,264	01-1962	HUGHES ALBERT L	297/69
	D	US-			
	E	US-			
	F	US-			
	G	US-			
	H	US-			
	I	US-			
	J	US-			
	K	US-			
	L	US-			
	M	US-			

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

Search Notes**Application/Control No.**

12/508,901

Examiner

Milton Nelson, Jr.

**Applicant(s)/Patent under
Reexamination**

HOFFMAN ET AL.

Art Unit

3636

SEARCHED

Class	Subclass	Date	Examiner
297	85M	4/17/2011	MN
	68		
	342		
	330		
	344.21		
	344.24		
	344.26		
	84		

INTERFERENCE SEARCHED

Class	Subclass	Date	Examiner

**SEARCH NOTES
(INCLUDING SEARCH STRATEGY)**

	DATE	EXMR
Inventor search	4/17/2011	MN
EAST, fwd/bwd	4/17/2011	MN
Parent 12276567 checked	4/17/2011	MN

EAST Search History

EAST Search History (Prior Art)

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L1	0	("2010/0127555").URPN.	USPAT	OR	OFF	2011/04/17 13:47
L2	44	(297/85M).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 13:47
L3	353	(297/68).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 13:52
L4	181	(297/84).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 14:06
L5	255	(297/342).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 14:13
L6	827	(297/330).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 14:24
L7	367	(297/344.21).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 14:53
L8	148	(297/344.24).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 15:05
L9	139	(297/344.26).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/17 15:08

S1	51	("2526623" "2714922" "20060082195" "3147038" "3163464" "3279847" "3352601" "3383135" "3493264" "3622198" "3622202" "3637255" "3863980" "4307912" "4386803" "4519647" "4674794" "4681365" "4682815" "4691964" "4696512" "4707025" "4722566" "4813743" "4915444" "5007679" "5086769" "5294177" "5564781" "5775775" "5876094" "5884970" "5931535" "5954392" "0507270" "6000754" "6135559" "6231120" "6491342" "6540291" "6612650" "6634706" "6733071" "6945599" "6948777" "7021711" "7040692" "7083235" "7188904" "7293834" "7311359"). PN.	US-PGPUB; USPAT	OR	OFF	2011/04/17 08:27
S2	1	"20100127555"	US-PGPUB; USPAT	OR	OFF	2011/04/17 08:36

4/ 17/ 11 3:11:17 PM

C:\ Documents and Settings\ mnelson\ My Documents\ EAST\ Workspaces\ 12508901.wsp

11/10/2009		Complete if Known	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT		Application Number	12/508,901
		Filing Date	July 24, 2009
		First Named Inventor	D. Stephen Hoffman
		Art Unit	3636
		Examiner Name	TBA
(use as many sheets as necessary)		Attorney Docket Number	4362-138IP
Sheet	A1	of	A2

U.S. PATENT DOCUMENTS AND APPLICATIONS						
Examin er Initials*	Cite No.	Document Number		Publication Date MM-DD- YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
		Number-Kind Code (if known)				
	1.	US-	7,311,359 B2	12-25-2007	Smith	
	2.	US-	7,293,834 B2	11-13-2007	Riach et al.	
	3.	US-	7,188,904 B2	03-13-2007	Bruck et al.	
	4.	US-	7,083,235 B2	08-01-2006	Grimm et al.	
	5.	US-	7,040,692 B1	05-2006	Pine, James J.	
	6.	US-	7,021,711 B1	04-04-2006	Hoffman et al.	
	7.	US-	6,948,777 B2	09-27-2005	Marshall et al.	
	8.	US-	6,945,599	09-2005	May	
	9.	US-	6,733,071	05-2004	Guillot	
	10.	US-	6,634,706	10-2003	May	
	11.	US-	6,612,650 B1	09-02-2003	Ambrosio et al.	
	12.	US-	6,540,291	04-01-2003	Hoffman et al.	
	13.	US-	6,491,342 B1	12-10-2002	Smith	
	14.	US-	6,231,120	05-2001	Wiecek	
	15.	US-	6,135,559	10-2000	Kowaiski	
	16.	US-	6,000,754	12-14-1999	Lawson	
	17.	US-	5,954,392	09-1999	Liss et al.	
	18.	US-	5,931,535 A	08-03-1999	Sweet	
	19.	US-	5,884,970 A	03-23-1999	Howard	
	20.	US-	5,876,094	03-1999	Hoffman	
	21.	US-	5,775,775	07-1998	Hoffman, D. Stephen	
	22.	US-	5,564,781	10-1996	Pine	
	23.	US-	5,294,177	03-1994	Rasnick et al.	
	24.	US-	5,086,769	02-11-1992	Vianello et al.	
	25.	US-	5,007,679	04-16-1991	Mizelle	
	26.	US-	4,915,444	04-10-1990	Rogers Jr.	
	27.	US-	4,813,743	03-21-1989	Mizelle	
	28.	US-	4,722,566	02-02-1988	Castellini	
	29.	US-	4,707,025	11-1987	Rogers, Jr.	
	30.	US-	4,696,512	09-29-1987	Burnett et al.	
	31.	US-	4,691,964	09-08-1987	Morgan	
	32.	US-	4,682,815 A	07-28-1987	Steifensand	
	33.	US-	4,681,365	07-21-1987	Pine	
	34.	US-	4,674,794	06-23-1987	Pine	
	35.	US-	4,519,647	05-28-1985	Rogers	
	36.	US-	4,386,803	06-07-1983	Gilderbloom	
	37.	US-	4,307,912	12-29-1981	Watt et al.	
	38.	US-	3,863,980	02-04-1975	Ciner	

Examiner Signature	/Milton Nelson, Jr/	Date Considered	04/17/2011
-----------------------	---------------------	--------------------	------------

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /MN/

11/10/2009		Complete if Known	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT (use as many sheets as necessary)		Application Number	12/508,901
		Filing Date	July 24, 2009
		First Named Inventor	D. Stephen Hoffman
		Art Unit	3636
		Examiner Name	TBA
Sheet A2	of A2	Attorney Docket Number	4362-138IP

	39.	US-	3,637,255	01-1972	Re, Frank M.	
	40.	US-	3,622,202	11-23-1971	Brown	
	41.	US-	3,622,198	11-1971	Re, Frank M.	
	42.	US-	3,493,264	02-1970	Re, Frank M.	
	43.	US-	3,383,135	05-14-1968	Posh	
	44.	US-	3,352,601	11-1967	Izchak Cycowicz	
	45.	US-	3,279,847	10-1966	Re	
	46.	US-	3,163,464	12-1964	Martin Leonard L.	
	47.	US-	3,147,038	09-01-1964	Barabas	
	48.	US-	2,714,922	08-09-1955	McKibban et al.	
	49.	US-	2,526,623 A	10-24-1950	Maurer	
	50.	US-	0,507,270 A	10-24-1893	Name Not Available	
	51.	US-	2006/0082195 A1	04-20-2006	Jiang	

FOREIGN PATENT DOCUMENTS

Examiner Initials*	Cite No.	Foreign Patent Document Country Code, Number, Kind Code (if known)	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T
	52.	GB 2 106 777 A	04-20-1983	Stella-Mobelwerk GmbH (DE)		Abstract

NON PATENT LITERATURE DOCUMENTS

Examiner Initials*	Cite No.	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published	T
	53.	Lusch Brochure: "Functional Fitting and Tubular steel frames for Relaxing Chairs (11 pages), Functional Fittings for Sofabeds and Beds (10 pages), Bed Fitting (5 pages) and Upholstery joints and accessories for furniture (9 pages)", (available before April 7, 2006).	Yes
	54.	"Stawett Functional Bed Mechanisms Brochure", pp. 3-93 (2001).	Yes

Examiner Signature	/Milton Nelson, Jr/	Date Considered	04/17/2011
--------------------	---------------------	-----------------	------------

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /MN/

Index of Claims



Application/Control No.

12/508,901

Examiner

Milton Nelson, Jr.

Applicant(s)/Patent under
Reexamination

HOFFMAN ET AL.

Art Unit

3636

✓	Rejected
=	Allowed

—	(Through numeral) Cancelled
÷	Restricted

N	Non-Elected
I	Interference

A	Appeal
O	Objected

Claim		Date									
Final	Original	4/17/11									
	1	✓									
	2	✓									
	3	✓									
	4	✓									
	5	✓									
	6	✓									
	7	✓									
	8	✓									
	9	✓									
	10	✓									
	11	✓									
	12	✓									
	13	✓									
	14	✓									
	15	✓									
	16										
	17										
	18										
	19										
	20										
	21										
	22										
	23										
	24										
	25										
	26										
	27										
	28										
	29										
	30										
	31										
	32										
	33										
	34										
	35										
	36										
	37										
	38										
	39										
	40										
	41										
	42										
	43										
	44										
	45										
	46										
	47										
	48										
	49										
	50										

Claim		Date									
Final	Original										
	51										
	52										
	53										
	54										
	55										
	56										
	57										
	58										
	59										
	60										
	61										
	62										
	63										
	64										
	65										
	66										
	67										
	68										
	69										
	70										
	71										
	72										
	73										
	74										
	75										
	76										
	77										
	78										
	79										
	80										
	81										
	82										
	83										
	84										
	85										
	86										
	87										
	88										
	89										
	90										
	91										
	92										
	93										
	94										
	95										
	96										
	97										
	98										
	99										
	100										

Claim		Date									
Final	Original										
	101										
	102										
	103										
	104										
	105										
	106										
	107										
	108										
	109										
	110										
	111										
	112										
	113										
	114										
	115										
	116										
	117										
	118										
	119										
	120										
	121										
	122										
	123										
	124										
	125										
	126										
	127										
	128										
	129										
	130										
	131										
	132										
	133										
	134										
	135										
	136										
	137										
	138										
	139										
	140										
	141										
	142										
	143										
	144										
	145										
	146										
	147										
	148										
	149										
	150										



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
 United States Patent and Trademark Office
 Address: COMMISSIONER FOR PATENTS
 P.O. Box 1450
 Alexandria, Virginia 22313-1450
 www.uspto.gov

BIB DATA SHEET

CONFIRMATION NO. 8901

SERIAL NUMBER 12/508,901	FILING or 371(c) DATE 07/24/2009 RULE	CLASS 297	GROUP ART UNIT 3636	ATTORNEY DOCKET NO. 4362-138IP	
APPLICANTS D. Stephen Hoffman, High Point, NC; Marcus L. Murphy, Lexington, NC; ** CONTINUING DATA ***** This application is a CIP of 12/276,567 11/24/2008 ** FOREIGN APPLICATIONS ***** ** IF REQUIRED, FOREIGN FILING LICENSE GRANTED ** ** SMALL ENTITY ** 08/06/2009					
Foreign Priority claimed ☐ Yes ☒ No 35 USC 119(a-d) conditions met ☐ Yes ☒ No Verified and /MILTON NELSON Acknowledged JR/ Examiner's Signature	☐ Met after Allowance Initials	STATE OR COUNTRY NC	SHEETS DRAWINGS 8	TOTAL CLAIMS 15	INDEPENDENT CLAIMS 2
ADDRESS MYERS BIGEL SIBLEY & SAJOVEC PO BOX 37428 RALEIGH, NC 27627 UNITED STATES					
TITLE RECIPROCATING SEATING UNIT WITH POWER ACTUATOR					
FILING FEE RECEIVED 527	FEES: Authority has been given in Paper No. _____ to charge/credit DEPOSIT ACCOUNT No. _____ for following:		☐ All Fees ☐ 1.16 Fees (Filing) ☐ 1.17 Fees (Processing Ext. of time) ☐ 1.18 Fees (Issue) ☐ Other _____ ☐ Credit		

Attorney Docket No. 4362-138IP

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: D. Stephen Hoffman

Confirmation No. 8901

Application No.: 12/508,901

Examiner: M. Nelson

Filing Date: July 24, 2009

Group Art Unit: 3636

For: Reciprocating Seating Unit with Power Actuator

Date: April 25, 2011

Mail Stop: Amendment

Commissioner for Patents

Box 1450

Alexandria, VA 22313-1450

**AMENDMENT AND RESPONSE TO
OFFICE ACTION DATED APRIL 19, 2011**

Sir:

Responsive to the Office Action dated April 19, 2011 (the Action), please amend the above-identified application as shown.

If any extension of time for the accompanying response or submission is required, Applicant requests that this be considered a petition therefor. The Commissioner is hereby authorized to charge any additional fee, which may be required, or credit any refund, to our Deposit Account No. 50-0220.

Amendments to the Claims are reflected in the **Listing of Claims** which begins on page 2 of this paper.

Remarks begin on page 7 of this paper.

Listing of Claims

This listing of claims will replace all prior versions, and listings, of claims in the application:

1. (currently amended) A seating unit, comprising:
 - a base unit with a first bearing surface;
 - a generally horizontally-disposed seat positioned above the base unit;
 - a generally upright backrest positioned above the base unit and substantially rearward of the seat;
 - an extendable ottoman;
 - a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;
 - a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and
 - a power actuating unit attached to the reclining mechanism, the actuating unit configured to move the ~~chair~~ seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman ~~are~~ is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;
- wherein the actuating unit is attached to an actuating mechanism, the actuating mechanism comprising:
 - a cross-member extending transversely across the seating unit;
 - first and second projections fixed to the cross-member;
 - wherein the first projection is pivotally attached to the actuating unit; and

wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.

2. (original) The seating unit defined in Claim 1, wherein the reclining mechanism includes a pantographic linkage on which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between links of the pantographic linkage form a near over-center arrangement that locks the ottoman in position.

3. (original) The seating unit defined in Claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.

4. (original) The seating unit defined in Claim 1, wherein the power actuating unit includes opposed first and second ends, and wherein the first end of the power actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the power actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

5. (original) The seating unit defined in Claim 4, wherein the upper swing link is pivotally attached with the backrest.

6. (original) The seating unit defined in Claim 4, wherein the power actuating unit includes a motor and an extendable member at the first and second ends.

7. (original) The seating unit defined in Claim 1, wherein the seat rises in moving from the TV position to the fully reclined position.

8. (original) The seating unit defined in Claim 1, wherein the reclining mechanism includes a backpost that is fixed relative to the backrest, a mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat and pivotally attached to the backpost.

9. (original) The seating unit defined in Claim 6, wherein the lower swing link is angled, and wherein a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions.

10. (original) The seating unit defined in Claim 9, wherein a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions.

11. (original) The seating unit defined in Claim 10, wherein the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle.

12. (original) The seating unit defined in Claim 1, wherein the reciprocating mechanism is a gliding mechanism.

13. (currently amended) A reciprocating and reclining seating unit, comprising:
a base unit with a first bearing surface;
a generally horizontally-disposed seat positioned above the base unit;
a generally upright backrest positioned above the base unit and substantially rearward of the seat;
an extendable ottoman;

a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;

a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and

a power linear actuating unit attached to the reclining mechanism, the actuating unit including a motor and an extendable rod and configured to move the chair between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman ~~are~~ is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;

wherein the actuating unit is attached to an actuating mechanism, the actuating mechanism comprising:

a cross-member extending transversely across the seating unit;

first and second projections fixed to the cross-member;

wherein the first projection is pivotally attached to the actuating unit; and

wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism; and

wherein the actuating unit includes opposed first and second ends, and wherein the first end of the actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

14. (currently amended) The seating unit defined in Claim 13, wherein a first pivot defined by the second projection and the lower swing link and a second pivot defined by the

lower swing link and the upper swing link are below ~~the~~ an axis defined by the extendable member rod of the actuating unit when the seating unit is in the upright and TV positions.


15. (original) The seating unit defined in Claim 14, wherein in the upright and TV positions, the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle.

REMARKS

At the time of the Action, Claims 1-15 were pending. All claims stand rejected under Section 112, second paragraph, as indefinite. Claims 1, 13 and 14 have been amended above in accordance with the suggestions in the Action. As such, Applicant submits that this rejection has been overcome and should be withdrawn.

Applicant submits that the present application is in condition for allowance and the same is earnestly solicited. Should the Examiner have any small matters outstanding of resolution, he is encouraged to telephone the undersigned at 919-854-1400 for expeditious handling.

Respectfully submitted,

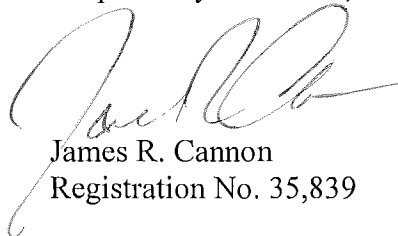


James R. Cannon
Registration No. 35,839

USPTO Customer No. 20792
Myers Bigel Sibley & Sajovec
Post Office Box 37428
Raleigh, North Carolina 27627
Telephone: 919/854-1400
Facsimile: 919/854-1401

CERTIFICATION OF TRANSMISSION

I hereby certify that this correspondence is being transmitted via the Office electronic filing system in accordance with § 1.6(a)(4) to the U.S. Patent and Trademark Office on April 25, 2011.

Signature: 

Typed or Printed Name of Person Signing Certificate: Cara L. Rose

Electronic Acknowledgement Receipt

EFS ID:	9948534
Application Number:	12508901
International Application Number:	
Confirmation Number:	8901
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR
First Named Inventor/Applicant Name:	D. Stephen Hoffman
Customer Number:	20792
Filer:	James R. Cannon/Cara Rose
Filer Authorized By:	James R. Cannon
Attorney Docket Number:	4362-138IP
Receipt Date:	25-APR-2011
Filing Date:	24-JUL-2009
Time Stamp:	15:26:41
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no
------------------------	----

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		4362_138IP_Amend_as_filed.pdf	533125 fd02681f3e3b500ad3b97c2fa6b0b095fea62a3d	yes	7

	Multipart Description/PDF files in .zip description		
	Document Description	Start	End
	Amendment/Req. Reconsideration-After Non-Final Reject	1	1
	Claims	2	6
	Applicant Arguments/Remarks Made in an Amendment	7	7

Warnings:

Information:

Total Files Size (in bytes):	533125
-------------------------------------	--------

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875					Application or Docket Number 12/508,901		Filing Date 07/24/2009		☐ To be Mailed	
APPLICATION AS FILED – PART I										
(Column 1)			(Column 2)			SMALL ENTITY ☒ OR		OTHER THAN SMALL ENTITY		
FOR	NUMBER FILED	NUMBER EXTRA	RATE (\$)	FEE (\$)	OR	RATE (\$)	FEE (\$)			
☐ BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A	N/A			N/A				
☐ SEARCH FEE (37 CFR 1.16(k), (l), or (m))	N/A	N/A	N/A			N/A				
☐ EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A	N/A			N/A				
TOTAL CLAIMS (37 CFR 1.16(j))	minus 20 =	*	X \$	=		X \$	=			
INDEPENDENT CLAIMS (37 CFR 1.16(h))	minus 3 =	*	X \$	=		X \$	=			
☐ APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).									
☐ MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))										
			TOTAL			TOTAL				
* If the difference in column 1 is less than zero, enter "0" in column 2.										
APPLICATION AS AMENDED – PART II										
(Column 1)			(Column 2)			SMALL ENTITY OR		OTHER THAN SMALL ENTITY		
AMENDMENT	04/25/2011	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA	RATE (\$)	ADDITIONAL FEE (\$)	OR	RATE (\$)	ADDITIONAL FEE (\$)
	Total (37 CFR 1.16(i))	* 15	Minus	** 20	= 0	X \$26 =	0		X \$	=
	Independent (37 CFR 1.16(h))	* 2	Minus	*** 3	= 0	X \$110 =	0		X \$	=
	☐ Application Size Fee (37 CFR 1.16(s))									
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))									
						TOTAL ADD'L FEE	0		TOTAL ADD'L FEE	
(Column 1)			(Column 2)			SMALL ENTITY OR		OTHER THAN SMALL ENTITY		
AMENDMENT	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA	RATE (\$)	ADDITIONAL FEE (\$)	OR	RATE (\$)	ADDITIONAL FEE (\$)	
	Total (37 CFR 1.16(i))	*	Minus	**	=	X \$	=	X \$	=	
	Independent (37 CFR 1.16(h))	*	Minus	***	=	X \$	=	X \$	=	
	☐ Application Size Fee (37 CFR 1.16(s))									
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))									
						TOTAL ADD'L FEE		TOTAL ADD'L FEE		
* If the entry in column 1 is less than the entry in column 2, write "0" in column 3. ** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20". *** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3". The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.										

Legal Instrument Examiner:
/LINDA WISE/

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

NOTICE OF ALLOWANCE AND FEE(S) DUE

20792 7590 05/12/2011
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

EXAMINER

NELSON JR, MILTON

ART UNIT

PAPER NUMBER

3636

DATE MAILED: 05/12/2011

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
-----------------	-------------	----------------------	---------------------	------------------

12/508,901

07/24/2009

D. Stephen Hoffman

4362-138IP

8901

TITLE OF INVENTION: RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

APPLN. TYPE	SMALL ENTITY	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	YES	\$755	\$300	\$0	\$1055	08/12/2011

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. PROSECUTION ON THE MERITS IS CLOSED. THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN THREE MONTHS FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. THIS STATUTORY PERIOD CANNOT BE EXTENDED. SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE DOES NOT REFLECT A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE IN THIS APPLICATION. IF AN ISSUE FEE HAS PREVIOUSLY BEEN PAID IN THIS APPLICATION (AS SHOWN ABOVE), THE RETURN OF PART B OF THIS FORM WILL BE CONSIDERED A REQUEST TO REAPPLY THE PREVIOUSLY PAID ISSUE FEE TOWARD THE ISSUE FEE NOW DUE.

HOW TO REPLY TO THIS NOTICE:

I. Review the SMALL ENTITY status shown above.

If the SMALL ENTITY is shown as YES, verify your current SMALL ENTITY status:

A. If the status is the same, pay the TOTAL FEE(S) DUE shown above.

B. If the status above is to be removed, check box 5b on Part B - Fee(s) Transmittal and pay the PUBLICATION FEE (if required) and twice the amount of the ISSUE FEE shown above, or

If the SMALL ENTITY is shown as NO:

A. Pay TOTAL FEE(S) DUE shown above, or

B. If applicant claimed SMALL ENTITY status before, or is now claiming SMALL ENTITY status, check box 5a on Part B - Fee(s) Transmittal and pay the PUBLICATION FEE (if required) and 1/2 the ISSUE FEE shown above.

II. PART B - FEE(S) TRANSMITTAL, or its equivalent, must be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted. If an equivalent of Part B is filed, a request to reapply a previously paid issue fee must be clearly made, and delays in processing may occur due to the difficulty in recognizing the paper as an equivalent of Part B.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

IMPORTANT REMINDER: Utility patents issuing on applications filed on or after Dec. 12, 1980 may require payment of maintenance fees. It is patentee's responsibility to ensure timely payment of maintenance fees when due.

PART B - FEE(S) TRANSMITTAL

**Complete and send this form, together with applicable fee(s), to: Mail Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450
or Fax (571)-273-2885**

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

20792 7590 05/12/2011
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being facsimile transmitted to the USPTO (571) 273-2885, on the date indicated below.

(Depositor's name)
(Signature)
(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
-----------------	-------------	----------------------	---------------------	------------------

12/508,901 07/24/2009 D. Stephen Hoffman 4362-138IP 8901

TITLE OF INVENTION: RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

APPLN. TYPE	SMALL ENTITY	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
-------------	--------------	---------------	---------------------	----------------------	------------------	----------

nonprovisional YES \$755 \$300 \$0 \$1055 08/12/2011

EXAMINER	ART UNIT	CLASS-SUBCLASS
----------	----------	----------------

NELSON JR, MILTON 3636 297-259200

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).

- ☐ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.
☐ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-02 or more recent) attached. **Use of a Customer Number is required.**

2. For printing on the patent front page, list

- (1) the names of up to 3 registered patent attorneys or agents OR, alternatively, 1 _____
(2) the name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed. 2 _____
3 _____

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document has been filed for recordation as set forth in 37 CFR 3.11. Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE (B) RESIDENCE: (CITY and STATE OR COUNTRY)

Please check the appropriate assignee category or categories (will not be printed on the patent) : ☐ Individual ☐ Corporation or other private group entity ☐ Government

4a. The following fee(s) are submitted:

- ☐ Issue Fee
☐ Publication Fee (No small entity discount permitted)
☐ Advance Order - # of Copies _____

4b. Payment of Fee(s); (Please first reapply any previously paid issue fee shown above)

- ☐ A check is enclosed.
☐ Payment by credit card. Form PTO-2038 is attached.
☐ The Director is hereby authorized to charge the required fee(s), any deficiency, or credit any overpayment, to Deposit Account Number _____ (enclose an extra copy of this form).

5. Change in Entity Status (from status indicated above)

- ☐ a. Applicant claims SMALL ENTITY status. See 37 CFR 1.27. ☐ b. Applicant is no longer claiming SMALL ENTITY status. See 37 CFR 1.27(g)(2).

NOTE: The Issue Fee and Publication Fee (if required) will not be accepted from anyone other than the applicant; a registered attorney or agent; or the assignee or other party in interest as shown by the records of the United States Patent and Trademark Office.

Authorized Signature _____ Date _____

Typed or printed name _____ Registration No. _____

This collection of information is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
12/508,901	07/24/2009	D. Stephen Hoffman	4362-138IP	8901

20792	7590	05/12/2011
MYERS BIGEL SIBLEY & SAJOVEC		
PO BOX 37428		
RALEIGH, NC 27627		

EXAMINER	
NELSON JR, MILTON	

ART UNIT	PAPER NUMBER
3636	

DATE MAILED: 05/12/2011

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b) (application filed on or after May 29, 2000)

The Patent Term Adjustment to date is 207 day(s). If the issue fee is paid on the date that is three months after the mailing date of this notice and the patent issues on the Tuesday before the date that is 28 weeks (six and a half months) after the mailing date of this notice, the Patent Term Adjustment will be 207 day(s).

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (<http://pair.uspto.gov>).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Customer Service Center of the Office of Patent Publication at 1-(888)-786-0101 or (571)-272-4200.

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Notice of Allowability	Application No.	Applicant(s)	
	12/508,901	HOFFMAN ET AL.	
	Examiner	Art Unit	
	Milton Nelson, Jr.	3636	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☒ This communication is responsive to Applicant's amendment of 4/25/11.
2. ☒ The allowed claim(s) is/are 1-15.
3. ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
 - a) ☐ All b) ☐ Some* c) ☐ None of the:
 1. ☐ Certified copies of the priority documents have been received.
 2. ☐ Certified copies of the priority documents have been received in Application No. ____.
 3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).

* Certified copies not received: ____.

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.
THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.

4. ☐ A SUBSTITUTE OATH OR DECLARATION must be submitted. Note the attached EXAMINER'S AMENDMENT or NOTICE OF INFORMAL PATENT APPLICATION (PTO-152) which gives reason(s) why the oath or declaration is deficient.
5. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
 - (a) ☐ including changes required by the Notice of Draftsperson's Patent Drawing Review (PTO-948) attached
 - 1) ☐ hereto or 2) ☐ to Paper No./Mail Date ____.
 - (b) ☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date ____.

Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).
6. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

Attachment(s)

- | | |
|--|---|
| 1. ☐ Notice of References Cited (PTO-892) | 5. ☐ Notice of Informal Patent Application |
| 2. ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948) | 6. ☐ Interview Summary (PTO-413),
Paper No./Mail Date ____. |
| 3. ☐ Information Disclosure Statements (PTO/SB/08),
Paper No./Mail Date ____ | 7. ☒ Examiner's Amendment/Comment |
| 4. ☐ Examiner's Comment Regarding Requirement for Deposit
of Biological Material | 8. ☒ Examiner's Statement of Reasons for Allowance |
| | 9. ☐ Other ____. |

EXAMINER'S AMENDMENT

An examiner's amendment to correct an obvious error appears below. Should the changes and/or additions be unacceptable to applicant, an amendment may be filed as provided by 37 CFR 1.312. To ensure consideration of such an amendment, it MUST be submitted no later than the payment of the issue fee.

The application has been amended as follows: In line 14 of claim 13, "chair" has been changed to - - seating unit - - .

Claims 1-15 are allowed.

The following is an examiner's statement of reasons for allowance:

The prior art of record fails to show a seating unit including a reciprocating mechanism and a power actuating unit attached to a reclining mechanism, the actuating unit configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman are generally vertically disposed and positioned below the seat, (b) an intermediated TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases; wherein the actuating

Art Unit: 3636

unit is attached to an actuating mechanism comprising: a cross-member extending transversely across the seating unit; first and second projections fixed to the cross-member; wherein the first projection is pivotally attached to the actuating unit; and wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism, in combination with other specifically claimed features.

Any comments considered necessary by applicant must be submitted no later than the payment of the issue fee and, to avoid processing delays, should preferably accompany the issue fee. Such submissions should be clearly labeled "Comments on Statement of Reasons for Allowance."

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Milton Nelson, Jr. whose telephone number is (571) 272-6861. The examiner can normally be reached on Mon-Thurs, and alternate Fridays, 5:30-3:00 EST.

The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Art Unit: 3636

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

/Milton Nelson, Jr./
Primary Examiner, Art Unit 3636

mn
May 8, 2011



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
 United States Patent and Trademark Office
 Address: COMMISSIONER FOR PATENTS
 P.O. Box 1450
 Alexandria, Virginia 22313-1450
 www.uspto.gov

BIB DATA SHEET

CONFIRMATION NO. 8901

SERIAL NUMBER 12/508,901	FILING or 371(c) DATE 07/24/2009 RULE	CLASS 297	GROUP ART UNIT 3636	ATTORNEY DOCKET NO. 4362-138IP	
APPLICANTS D. Stephen Hoffman, High Point, NC; Marcus L. Murphy, Lexington, NC; ** CONTINUING DATA ***** This application is a CIP of 12/276,567 11/24/2008 ** FOREIGN APPLICATIONS ***** ** IF REQUIRED, FOREIGN FILING LICENSE GRANTED ** ** SMALL ENTITY ** 08/06/2009					
Foreign Priority claimed ☐ Yes ☒ No 35 USC 119(a-d) conditions met ☐ Yes ☒ No Verified and /MILTON NELSON Acknowledged JR/ Examiner's Signature	☐ Met after Allowance Initials	STATE OR COUNTRY NC	SHEETS DRAWINGS 8	TOTAL CLAIMS 15	INDEPENDENT CLAIMS 2
ADDRESS MYERS BIGEL SIBLEY & SAJOVEC PO BOX 37428 RALEIGH, NC 27627 UNITED STATES					
TITLE RECIPROCATING SEATING UNIT WITH POWER ACTUATOR					
FILING FEE RECEIVED 527	FEES: Authority has been given in Paper No. _____ to charge/credit DEPOSIT ACCOUNT No. _____ for following:		☐ All Fees ☐ 1.16 Fees (Filing) ☐ 1.17 Fees (Processing Ext. of time) ☐ 1.18 Fees (Issue) ☐ Other _____ ☐ Credit		

Index of Claims



Application/Control No.

12/508,901

Examiner

Milton Nelson, Jr.

Applicant(s)/Patent under
Reexamination

HOFFMAN ET AL.

Art Unit

3636

✓	Rejected
=	Allowed

—	(Through numeral) Cancelled
÷	Restricted

N	Non-Elected
I	Interference

A	Appeal
O	Objected

Claim		Date									
Final	Original	4/17/11	5/8/11								
1	1	✓	=								
2	2	✓	=								
3	3	✓	=								
7	4	✓	=								
8	5	✓	=								
9	6	✓	=								
4	7	✓	=								
5	8	✓	=								
10	9	✓	=								
11	10	✓	=								
12	11	✓	=								
6	12	✓	=								
13	13	✓	=								
14	14	✓	=								
15	15	✓	=								
	16										
	17										
	18										
	19										
	20										
	21										
	22										
	23										
	24										
	25										
	26										
	27										
	28										
	29										
	30										
	31										
	32										
	33										
	34										
	35										
	36										
	37										
	38										
	39										
	40										
	41										
	42										
	43										
	44										
	45										
	46										
	47										
	48										
	49										
	50										

Claim		Date									
Final	Original										
	51										
	52										
	53										
	54										
	55										
	56										
	57										
	58										
	59										
	60										
	61										
	62										
	63										
	64										
	65										
	66										
	67										
	68										
	69										
	70										
	71										
	72										
	73										
	74										
	75										
	76										
	77										
	78										
	79										
	80										
	81										
	82										
	83										
	84										
	85										
	86										
	87										
	88										
	89										
	90										
	91										
	92										
	93										
	94										
	95										
	96										
	97										
	98										
	99										
	100										

Claim		Date									
Final	Original										
	101										
	102										
	103										
	104										
	105										
	106										
	107										
	108										
	109										
	110										
	111										
	112										
	113										
	114										
	115										
	116										
	117										
	118										
	119										
	120										
	121										
	122										
	123										
	124										
	125										
	126										
	127										
	128										
	129										
	130										
	131										
	132										
	133										
	134										
	135										
	136										
	137										
	138										
	139										
	140										
	141										
	142										
	143										
	144										
	145										
	146										
	147										
	148										
	149										
	150										

Search Notes**Application/Control No.**

12/508,901

Examiner

Milton Nelson, Jr.

**Applicant(s)/Patent under
Reexamination**

HOFFMAN ET AL.

Art Unit

3636

SEARCHED

Class	Subclass	Date	Examiner
297	85M	4/17/2011	MN
	68		
	342		
	330		
	344.21		
	344.24		
	344.26		
	84		
updated		4/28/2011	MN

INTERFERENCE SEARCHED

Class	Subclass	Date	Examiner
classification, text		4/28/2011	MN

**SEARCH NOTES
(INCLUDING SEARCH STRATEGY)**

	DATE	EXMR
Inventor search	4/17/2011	MN
EAST, fwd/bwd	4/17/2011	MN
Parent 12276567 checked	4/17/2011	MN
EAST, text, fwd/bwd	4/28/2011	MN

Issue Classification 	Application No. 12/508,901	Applicant(s) HOFFMAN ET AL.	
	Examiner Milton Nelson, Jr.	Art Unit 3636	

ISSUE CLASSIFICATION												
ORIGINAL					CROSS REFERENCE(S)							
CLASS		SUBCLASS			CLASS	SUBCLASS (ONE SUBCLASS PER BLOCK)						
297		85M										
INTERNATIONAL CLASSIFICATION												
A	4	7	C	1/031								
				/								
				/								
				/								
				/								
---- (Assistant Examiner) (Date)					/Milton Nelson, Jr./ 5/8/11 (Primary Examiner) (Date)					Total Claims Allowed: 15		
(Legal Instruments Examiner) (Date)										O.G. Print Claim(s) 1	O.G. Print Fig. 3	

☐ Claims renumbered in the same order as presented by applicant												☐ CPA		☐ T.D.		☐ R.1.47	
Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original				
1	1		31		61		91		121		151		181				
2	2		32		62		92		122		152		182				
3	3		33		63		93		123		153		183				
7	4		34		64		94		124		154		184				
8	5		35		65		95		125		155		185				
9	6		36		66		96		126		156		186				
4	7		37		67		97		127		157		187				
5	8		38		68		98		128		158		188				
10	9		39		69		99		129		159		189				
11	10		40		70		100		130		160		190				
12	11		41		71		101		131		161		191				
6	12		42		72		102		132		162		192				
13	13		43		73		103		133		163		193				
13	14		44		74		104		134		164		194				
15	15		45		75		105		135		165		195				
	16		46		76		106		136		166		196				
	17		47		77		107		137		167		197				
	18		48		78		108		138		168		198				
	19		49		79		109		139		169		199				
	20		50		80		110		140		170		200				
	21		51		81		111		141		171		201				
	22		52		82		112		142		172		202				
	23		53		83		113		143		173		203				
	24		54		84		114		144		174		204				
	25		55		85		115		145		175		205				
	26		56		86		116		146		176		206				
	27		57		87		117		147		177		207				
	28		58		88		118		148		178		208				
	29		59		89		119		149		179		209				
	30		60		90		120		150		180		210				

EAST Search History

EAST Search History (Prior Art)

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L2	14	("20030024338" "4365836" "5368366" "5388886" "5435621" "5570930" "5595420" "5704686" "5806921" "5992931" "6059367" "6135559").PN. OR ("6893085").URPN.	US-PGPUB; USPAT; USOCR	OR	OFF	2011/04/28 12:37
L4	13	("3016264" "3743348" "4007960" "4365836" "4674794" "5013084" "5354116" "5582457" "5845961" "6142558").PN. OR ("6840575").URPN.	US-PGPUB; USPAT; USOCR	OR	OFF	2011/04/28 12:38
L7	14	("3016264").URPN.	USPAT	OR	OFF	2011/04/28 12:39
L9	20	("2714922").URPN.	USPAT	OR	OFF	2011/04/28 12:56
L10	32	("2750988" "2788058" "3062581" "3139305" "3243225" "3383135" "3714680" "3743349" "3756651" "4071275" "4195878").PN. OR ("4307912").URPN.	US-PGPUB; USPAT; USOCR	OR	OFF	2011/04/28 12:58

L11	25	("1111685" "1564000" "2588574" "3414324" "3596982" "3641995" "3792905" "3804460" "3889998" "3934927" "3934928").PN. OR ("4691964").URPN.	US-PGPUB; USPAT; USOCR	OR	OFF	2011/04/28 13:00
S12	44	(297/85M).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 08:50
S13	353	(297/68).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:06
S14	255	(297/342).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:07
S16	828	(297/330).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:08
S17	368	(297/344.21).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:10
S18	148	(297/344.24).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:12
S19	139	(297/344.26).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:12

S20	181	(297/84).CCLS.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:13
S21	10	ottoman and reclining and reciprocating	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:14
S22	7	power and S21	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:14
S23	8	motor and S21	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2011/04/28 09:15

4/ 28/ 11 1:02:37 PM

C:\ Documents and Settings\ mnelson\ My Documents\ EAST\ Workspaces\ 12508901.wsp

11/10/2009		Complete if Known	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT (use as many sheets as necessary)		Application Number	12/508,901
		Filing Date	July 24, 2009
		First Named Inventor	D. Stephen Hoffman
		Art Unit	3636
		Examiner Name	TBA
Sheet A2	of A2	Attorney Docket Number	4362-138IP

Change(s) applied
to document,
/M.C.E./
6/16/2011

	39.	US- 3,637,255	01-1972	Re, Frank M.	
	40.	US- 3,622,202	11-23-1971	Brown	
	41.	US- 3,622,198	11-1971	Re, Frank M.	
	42.	US- 3,493,264	02-1970	Re, Frank M.	
	43.	US- 3,383,135	05-14-1968	Posh	
	44.	US- 3,352,601	11-1967	Izchak Cycowicz	
	45.	US- 3,279,847	10-1966	Re	
	46.	US- 3,163,464	12-1964	Martin Leonard L.	
	47.	US- 3,147,038	09-01-1964	Barabas	
	48.	US- 2,714,922	08-09-1955	McKibban et al.	
	49.	US- 2,526,623 A	10-24-1950	Maurer	
	50.	US- 0,507,270 A	10-24-1893	Name Not Available	Hirschfeld
	51.	US- 2006/0082195 A1	04-20-2006	Jiang	

FOREIGN PATENT DOCUMENTS

Examiner Initials*	Cite No.	Foreign Patent Document Country Code, Number, Kind Code (if known)	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T
	52.	GB 2 106 777 A	04-20-1983	Stella-Mobelwerk GmbH (DE)		Abstract

NON PATENT LITERATURE DOCUMENTS

Examiner Initials*	Cite No.	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published	T
	53.	Lusch Brochure: "Functional Fitting and Tubular steel frames for Relaxing Chairs (11 pages), Functional Fittings for Sofabeds and Beds (10 pages), Bed Fitting (5 pages) and Upholstery joints and accessories for furniture (9 pages)", (available before April 7, 2006).	Yes
	54.	"Stawett Functional Bed Mechanisms Brochure", pp. 3-93 (2001).	Yes

Examiner Signature	/Milton Nelson, Jr/	Date Considered	04/17/2011
--------------------	---------------------	-----------------	------------

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /MN/

PRINTER RUSH

(PTO ASSISTANCE)

Application: 12508901

Examiner: Nelson, Jr.

GAU: 3636

From: Carlota Erana

Location: IDC

Creation Date: 06/27/2011

Tracking #: Week Date: 05/16/2011

<u>DOC CODE</u>	<u>DOC DATE</u>	<u>MISCELLANEOUS</u>
☐ 1449		☐ Continuing Data
☐ IDS		☐ Foreign Priority
☐ CLM		☐ Document Legibility
☐ IIFW/FWCLM		☐ Fees
☐ SRFW		☒ Other
☐ DRW		
☐ OATH		
☐ 312		
☐ SPEC		

[RUSH] Message:

Please shorten abstract in light of MPEP 608.01 (b), paragraph entitled "Language and Format".

Thank you.

[XRUSH] Response:

Initials: _____

Examiner: PUBS contacts - for DESIGNS: Don Fairchild, 703-756-1566; for ALL OTHER files: Bernadette Queen, 703-756-1565.

NOTE: This form will be included as part of the official USPTO record with the response document coded as XRUSH.

REV: Sep 10

PRINTER RUSH

(PTO ASSISTANCE)

Application: 12508901

Examiner: Nelson, Jr.

GAU: 3636

From: Carlota Erana

Location: IDC

Creation Date: 06/27/2011

Tracking #: Week Date: 05/16/2011

<u>DOC CODE</u>	<u>DOC DATE</u>	<u>MISCELLANEOUS</u>
☐ 1449		☐ Continuing Data
☐ IDS		☐ Foreign Priority
☐ CLM		☐ Document Legibility
☐ IIFW/FWCLM		☐ Fees
☐ SRFW		☒ Other
☐ DRW		
☐ OATH		
☐ 312		
☐ SPEC		

[RUSH] Message:

Please shorten abstract in light of MPEP 608.01 (b), paragraph entitled "Language and Format".

Thank you.

[XRUSH] Response:

OK

Initials: MN

Examiner: PUBS contacts - for DESIGNS: Don Fairchild, 703-756-1566; for ALL OTHER files: Bernadette Queen, 703-756-1565.

NOTE: This form will be included as part of the official USPTO record with the response document coded as XRUSH.

REV: Sep 10



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
-----------------	-------------	----------------------	---------------------	------------------

12/508,901

07/24/2009

D. Stephen Hoffman

4362-138IP

8901

20792 7590 07/07/2011
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

EXAMINER

NELSON JR, MILTON

ART UNIT

PAPER NUMBER

3636

MAIL DATE

DELIVERY MODE

07/07/2011

PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

**Supplemental
Notice of Allowability**

Application No.

12/508,901

Examiner

MILTON NELSON JR

Applicant(s)

HOFFMAN ET AL.

Art Unit

3636

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☐ This communication is responsive to ____.
2. ☒ The allowed claim(s) is/are 1-15.
3. ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some* c) ☐ None of the:
1. ☐ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. ____.
3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).
- * Certified copies not received: ____.

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.

THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.

4. ☐ A SUBSTITUTE OATH OR DECLARATION must be submitted. Note the attached EXAMINER'S AMENDMENT or NOTICE OF INFORMAL PATENT APPLICATION (PTO-152) which gives reason(s) why the oath or declaration is deficient.
5. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
- (a) ☐ including changes required by the Notice of Draftsperson's Patent Drawing Review (PTO-948) attached
- 1) ☐ hereto or 2) ☐ to Paper No./Mail Date ____.
- (b) ☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date ____.
- Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).**
6. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

Attachment(s)

- | | |
|--|---|
| 1. ☐ Notice of References Cited (PTO-892) | 5. ☐ Notice of Informal Patent Application |
| 2. ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948) | 6. ☐ Interview Summary (PTO-413),
Paper No./Mail Date ____. |
| 3. ☐ Information Disclosure Statements (PTO/SB/08),
Paper No./Mail Date ____ | 7. ☒ Examiner's Amendment/Comment |
| 4. ☐ Examiner's Comment Regarding Requirement for Deposit
of Biological Material | 8. ☐ Examiner's Statement of Reasons for Allowance |
| | 9. ☐ Other ____. |

EXAMINER'S AMENDMENT

An examiner's amendment to correct an obvious error appears below. Should the changes and/or additions be unacceptable to applicant, an amendment may be filed as provided by 37 CFR 1.312. To ensure consideration of such an amendment, it MUST be submitted no later than the payment of the issue fee.

The application has been amended as follows: The abstract of the disclosure, filed July 24, 2009, has been amended as follows:

1. In line 9, “, the actuating unit configured to move the” has been changed to
-- . -- .
2. Lines 10-21 have been deleted in their entirety.

Applicant is advised that these changes are necessary because the abstract of the disclosure, as filed, is excessive in length. See MPEP 608.01(b).

Claims 1-15 are allowed.

Any inquiry concerning this communication or earlier communications from the examiner should be directed to MILTON NELSON JR whose telephone number is (571)272-6861. The examiner can normally be reached on Mon-Thurs, and alternate Fridays, 5:30-3:00 EST.

Art Unit: 3636

The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

/Milton Nelson, Jr./
Primary Examiner, Art Unit 3636

mn
July 3, 2011

PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), to: **Mail** Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450
or Fax (571)-273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

20792 7590 05/12/2011
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being facsimile transmitted to the USPTO (571) 273-2885, on the date indicated below.

(Depositor's name)
(Signature)
(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
12/508,901	07/24/2009	D. Stephen Hoffman	4362-138IP	8901

TITLE OF INVENTION: RECIPROCATING SEATING UNIT WITH POWER ACTUATOR

APPLN. TYPE	SMALL ENTITY	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	YES	\$755	\$300	\$0	\$1055	08/12/2011

EXAMINER	ART UNIT	CLASS-SUBCLASS
NELSON JR, MILTON	3636	297-259200

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).
☐ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.
☐ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-02 or more recent) attached. **Use of a Customer Number is required.**

2. For printing on the patent front page, list
 (1) the names of up to 3 registered patent attorneys or agents OR, alternatively,
 (2) the name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed.

Myers Bigel Sibley & Sajovec

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document has been filed for recordation as set forth in 37 CFR 3.11. Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE

(B) RESIDENCE: (CITY and STATE OR COUNTRY)

Ultra-Mek, Inc.

Denton, North Carolina

Please check the appropriate assignee category or categories (will not be printed on the patent): ☐ Individual ☒ Corporation or other private group entity ☐ Government

4a. The following fee(s) are submitted:

- ☒ Issue Fee
☒ Publication Fee (No small entity discount permitted)
☐ Advance Order - # of Copies _____

4b. Payment of Fee(s): (Please first reapply any previously paid issue fee shown above)

- ☐ A check is enclosed.
☐ Payment by credit card. Form PTO-2038 is attached.
☒ The Director is hereby authorized to charge the required fee(s), any deficiency, or credit any overpayment, to Deposit Account Number **50-0220** (enclose an extra copy of this form).

5. Change in Entity Status (from status indicated above)

- ☐ a. Applicant claims SMALL ENTITY status. See 37 CFR 1.27. ☐ b. Applicant is no longer claiming SMALL ENTITY status. See 37 CFR 1.27(g)(2).

NOTE: The Issue Fee and Publication Fee (if required) will not be accepted from anyone other than the applicant; a registered attorney or agent; or the assignee or other party in interest as shown by the records of the United States Patent and Trademark Office.

Authorized Signature

Date

Typed or printed name

James R. Cannon

Registration No.

35,839

This collection of information is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Electronic Patent Application Fee Transmittal

Application Number:	12508901			
Filing Date:	24-Jul-2009			
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR			
First Named Inventor/Applicant Name:	D. Stephen Hoffman			
Filer:	James R. Cannon/Joyce Paoli			
Attorney Docket Number:	4362-138IP			
Filed as Small Entity				
Utility under 35 USC 111(a) Filing Fees				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Utility Appl issue fee	2501	1	755	755
Publ. Fee- early, voluntary, or normal	1504	1	300	300

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				1055

Electronic Acknowledgement Receipt

EFS ID:	10696244
Application Number:	12508901
International Application Number:	
Confirmation Number:	8901
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR
First Named Inventor/Applicant Name:	D. Stephen Hoffman
Customer Number:	20792
Filer:	James R. Cannon/Joyce Paoli
Filer Authorized By:	James R. Cannon
Attorney Docket Number:	4362-138IP
Receipt Date:	09-AUG-2011
Filing Date:	24-JUL-2009
Time Stamp:	14:40:17
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$ 1055
RAM confirmation Number	992
Deposit Account	500220
Authorized User	

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Issue Fee Payment (PTO-85B)	4362-138IP-issuefee.pdf	170838	no	1
			2e35e9e68f60674661e92f6a25f0aac9aafab211		

Warnings:**Information:**

2	Fee Worksheet (SB06)	fee-info.pdf	31659	no	2
			802501ebba53c709586f52518f2f0ac77095b1e8		

Warnings:**Information:**

Total Files Size (in bytes):			202497
------------------------------	--	--	--------

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	ISSUE DATE	PATENT NO.	ATTORNEY DOCKET NO.	CONFIRMATION NO.
12/508,901	09/13/2011	8016348	4362-138IP	8901

20792 7590 08/24/2011
MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

ISSUE NOTIFICATION

The projected patent number and issue date are specified above.

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b) (application filed on or after May 29, 2000)

The Patent Term Adjustment is 207 day(s). Any patent to issue from the above-identified application will include an indication of the adjustment on the front page.

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (<http://pair.uspto.gov>).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Application Assistance Unit (AAU) of the Office of Data Management (ODM) at (571)-272-4200.

APPLICANT(s) (Please see PAIR WEB site <http://pair.uspto.gov> for additional applicants):

D. Stephen Hoffman, High Point, NC;
Marcus L. Murphy, Lexington, NC;

Attorney Docket No. 4362-138IP

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: Hoffman et al.
Application No.: 12/508,901
Filed: July 24, 2009
Title: *Reciprocating Seating Unit With Power Actuator*

U.S. Patent No.: 8,016,348
Issued: September 13, 2011
Confirmation No: 8901

November 8, 2011

Commissioner for Patents
Attn: Certificate of Correction Branch
P.O. Box 1450
Alexandria, VA 22313-1450


**REQUEST FOR ENTRY OF CERTIFICATE OF CORRECTION UNDER
No. 35 U.S.C. §254 AND 37 C.F.R. §1.322**

Sir:

The Assignee of record for the above-referenced patent hereby requests, pursuant to 35 U.S.C. §254 and 37 C.F.R. §1.322, that a Certificate of Correction be issued. This request is made in order to correct the mistakes incurred through the fault of the U.S. Patent and Trademark Office. The mistake appearing in the patent is set forth with corrections on the Certificate of Correction attached herewith.

No fee is believed due. However, the Commissioner is authorized to charge any deficiency or credit any overpayment to Deposit Account No. 50-0220.


Respectfully submitted,


James R. Cannon
Registration No. 35,839

Customer No.: 20792
Myers Bigel Sibley & Sajovec, P.A.
P. O. Box 37428, Raleigh, NC 27627
Telephone: (919) 854-1400
Facsimile: (919) 854-1401

CERTIFICATION OF ELECTRONIC TRANSMISSION

I hereby certify that this correspondence is being transmitted via the Office electronic filing system in accordance with § 1.6(a)(4) to the U.S. Patent and Trademark Office on November 8 2011.


Lanie A. Dobson

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

Page 1 of 1

PATENT NO. : 8,016,348
APPLICATION NO.: 12/508,901
ISSUE DATE: September 13, 2011
INVENTOR(S) : Hoffman et al.

It is certified that an error appears or errors appear in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Claims:

Column 10, Claim 13, Line 60: Please correct "ottoman are is"
to read -- ottoman is --

Electronic Acknowledgement Receipt

EFS ID:	11356651
Application Number:	12508901
International Application Number:	
Confirmation Number:	8901
Title of Invention:	RECIPROCATING SEATING UNIT WITH POWER ACTUATOR
First Named Inventor/Applicant Name:	D. Stephen Hoffman
Customer Number:	20792
Filer:	James R. Cannon/Lanie Dobson
Filer Authorized By:	James R. Cannon
Attorney Docket Number:	4362-138IP
Receipt Date:	08-NOV-2011
Filing Date:	24-JUL-2009
Time Stamp:	10:30:57
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no
------------------------	----

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Request for Certificate of Correction	4362-138IP_Request_for_COC.pdf	505363 d4d6dafad0810a0b7f8ef3e568c2646a2ac49caf	no	2

Warnings:

Information:

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,016,348 B2
APPLICATION NO. : 12/508901
DATED : September 13, 2011
INVENTOR(S) : Hoffman et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Claims:

Column 10, Claim 13, Line 60: Please correct "ottoman are is"
to read -- ottoman is --

Signed and Sealed this
Thirteenth Day of December, 2011

A handwritten signature in black ink, reading "David J. Kappos". The signature is written in a cursive, flowing style with a large initial "D".

David J. Kappos
Director of the United States Patent and Trademark Office



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY.DOCKET NO./TITLE	REQUEST ID
12/508,901	07/24/2009	D. Stephen Hoffman	4362-138IP	10472

Acknowledgement of Loss of Entitlement to Entity Status Discount

The entity status change request below filed through Private PAIR on 01/15/2016 has been accepted.

CERTIFICATIONS:

Change of Entity Status:

✕ Applicant changing to regular undiscounted fee status.

NOTE: Checking this box will be taken to be notification of loss of entitlement to small or micro entity status, as applicable.

This portion must be completed by the signatory or signatories making the entity status change in accordance with 37 CFR 1.4(d)(4).

Signature:	/James R. Cannon/
Name:	James R. Cannon
Registration Number:	35839

Attorney Docket No. 4362-138IP

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: D. S. Hoffman et al.
Serial No.: 12/508,901
U.S. Patent No.: 8,016,348
Filed: July 24, 2009
For: *Reciprocating Seating Unit with Power Actuator*

Date: January 15, 2016

Mail Stop M Correspondence
Director of the USPTO
P.O. Box 1450
Alexandria, VA 22313-1450

PAYMENT OF DEFICIENCY OWED UNDER 37 C.F.R. § 1.28(c)

Sir:

Upon further examination of the above-identified patent, Applicant realizes that the maintenance fee may have been paid as a small entity in error. Applicant regrets this error (if any), which was made without any deceptive intent.

Pursuant to 37 C.F.R. §1.28(c)(2), the following information is set forth hereafter: 1) each fee that was erroneously paid as a small entity, including the fee paid and the date that the fee was paid; 2) the deficiency owed for each fee that was erroneously paid, including surcharge; and 3) the total deficiency payment owed.


Fee Paid	Date Paid	Amount Owed as Large Entity	Amount Paid	Deficiency
3.5 Year Maintenance Fee	16 Feb 2015	\$1600	\$800	\$800
			TOTAL OWED	\$800

The Commissioner is hereby authorized to charge \$800.00 (the deficiency between the amount paid and the amount due) to our deposit account number 50-0220. This amount is believed correct, however the Commissioner is authorized to charge any additional deficiency, or credit any overpayment, to our deposit account number 50-0220.

01/20/2016 MBANGURA 00000009 500220 8016348
01 FC:1599 800.00 DA

In re: D. S. Hoffman et al.
Serial No.: 12/508,901
U.S. Patent No.: 8,016,348
Filed: July 24, 2009
For: *Reciprocating Seating Unit with Power Actuator*


Respectfully submitted

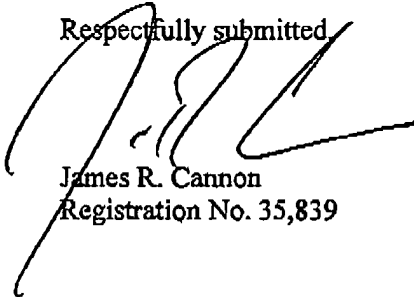

James R. Cannon
Registration No. 35,839

Myers Bigel Sibley & Sajovec, P.A.
P. O. Box 37428
Raleigh, North Carolina 27627
Telephone: (919) 854-1400
Facsimile: (919) 854-1401
Customer No. 20792

**CERTIFICATION OF FACSIMILE TRANSMISSION
UNDER 37 CFR § 1.8**

I hereby certify that this correspondence is being facsimile transmitted to the U.S. Patent and Trademark Office via facsimile number 571-273-6500 on January 15, 2016.

Signature: 
Typed or Printed Name of Person Signing Certificate: V. Katherine Barrow
Date of Signature: January 15, 2016



MYERS BIGEL

PATENT LAWYERS | *When innovation demands expertise.*

FACSIMILE TRANSMISSION COVER SHEET

MYERS BIGEL SIBLEY & SAJOVEC, P.A.
4140 Parklake Avenue, Suite 600
Raleigh, NC 27612
Fax: (919) 854-1401 Phone: (919) 854-1400

To: USPTO
Company: Myers Bigel
Fax #: 571-273-10500
File Number: 4302-1381P
From: Katherine Barrow
Return Fax To: 919-854-1401
Date: January 15, 2016
Number of Pages including cover sheet: 3

Please call Administrative services at (919) 854-1400 if there are any problems with this transmission.


The information contained in this facsimile message is legally privileged and confidential information intended only for the use of the individual or entity named above. If the reader of this message is not the intended recipient, you are hereby notified that any dissemination, distribution or copy of this telecopy is strictly prohibited. If you have received this telecopy in error please immediately notify us by telephone and return the original message to us at the address above via United States Postal Service. Thank You.



UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents
United States Patent and Trademark Office
P.O. Box 1450
Alexandria, VA 22313-1450
www.uspto.gov

MYERS BIGEL & SIBLEY, P.A.
PO BOX 37428
RALEIGH NC 27627



In re Patent No. 8,016,348 :
Issue Date: September 13, 2011 :
Application No. 12/508,901 : NOTICE
Filed: July 24, 2009 :
Attorney Docket No. 4362-138IP :

This is a notice regarding your request, filed January 15, 2016, for acceptance of a fee deficiency submission under 37 CFR 1.28.

On September 1, 1998, the Court of Appeals for the Federal Circuit held that 37 CFR 1.28(c) is the sole provision governing the time for correction of the erroneous payment of the issue fee as a small entity. See DH Technology v. Synergystex International, Inc. 154 F.3d 1333, 47 USPQ2d 1865 (Fed. Cir. Sept. 1, 1998).

The Office no longer investigates or rejects original or reissue applications under 37 CFR 1.56. **1098 Off. Gaz. Pat. Office 502 (January 3, 1989)**. Therefore, nothing in this Notice is intended to imply that an investigation was done.

Your fee deficiency submission under 37 CFR 1.28 is hereby **ACCEPTED**.

This patent is no longer entitled to small entity status. Accordingly, all future fees paid in this patent must be paid at the undiscounted entity rate.

Applicant is reminded that pursuant to 37 CFR 1.28(c)(2)(i) "where a fee paid in error as a small entity was subject to a fee decrease between the time the fee was paid in error and the time the deficiency is paid in full, the deficiency owed is equal to the amount (previously) paid in error." If the itemization submitted with the present request does not comply with 37 CFR 1.28(c)(2)(i) because a fee has decreased, applicant should, within ONE MONTH of the date of this Notice, submit a renewed request for acceptance of a fee deficiency under 37 CFR 1.28(c) along with balance of the correct fee deficiency in compliance with 37 CFR 1.28(c)(2)(i) and a replacement itemized listing of each fee erroneously paid as a small entity in compliance with 37 CFR 1.28(c)(2)(ii). **NO EXTENSION OF TIME UNDER 37 CFR 1.136 IS PERMITTED.**

Telephone inquiries concerning this decision should be directed to the undersigned at (571) 272-0593.

/DeTya Flowers/
DeTya Flowers
Petitions Paralegal Specialist
Office of Petitions