

NAME : A.K.LIKITH CHARN

REG NO: 192412305

COURSE NAME : ANALOG AND DIGITAL COMMUNICATION (ECA0802)

Exp. No.1b

CHARACTERISTICS STUDY OF SIDE BAND POWER AND FREQUENCIES IN AM USING MATLAB

AIM:

To generate and analyze an Amplitude Modulated (AM) signal in MATLAB by creating the message and carrier signals, determining the modulation index, identifying the upper and lower sideband frequencies using FFT analysis, calculating the carrier, sideband, and total transmitted power, and studying the effect of modulation index on the AM signal characteristics and transmission efficiency.

APPARATUS REQUIRED:

- MATLAB SOFTWARE

Objective :

To generate an Amplitude Modulated (AM) signal in MATLAB using specified carrier and modulating signal parameters

PROGRAM 1:

```
clc; clear; close all;
```

```
Am = 1;
```

```
fm = 500;
```

```
Ac = 5;
```

```
fc = 5000;
```

```
fs = 20 * fc;
```

```
t = 0:1/fs:4/fm;
```

```
m = Am * sin(2 * pi * fm * t);
```

```
c = Ac * sin(2 * pi * fc * t);
```

```
mu = Am / Ac;
```

```
am = Ac * (1 + mu * sin(2 * pi * fm * t)) .* sin(2 * pi * fc * t);
```

```
dem = abs(hilbert(am));
```

```
dem = dem - mean(dem);
```

```
N = length(am);
```

```
f = linspace(-fs/2, fs/2, N);
```

```

AM_FFT = abs(fftshift(fft(am))) / N;

USB = fc + fm;

LSB = fc - fm;

Pc = Ac^2 / 2;

Psb = (mu^2 * Pc) / 4;

figure('Name', 'AM Modulation', 'NumberTitle', 'off');

subplot(3,2,1), plot(t, m), title('Message'), grid on

subplot(3,2,2), plot(t, c), title('Carrier'), grid on

subplot(3,2,3), plot(t, am), title('AM Signal'), grid on

subplot(3,2,4), plot(t, dem), title('Demodulated'), grid on

subplot(3,2,5), plot(f, AM_FFT), xlim([fc - 3 * fm fc + 3 * fm]), title('Sidebands'), grid on

subplot(3,2,6), bar([Pc Psb Psb]), set(gca, 'XTickLabel', {'Carrier', 'USB', 'LSB'}), title('Power'), grid on

fprintf('μ=%.2f | USB=%d Hz | LSB=%d Hz | Pc=%.2f W | Psb=%.3f W\n', ...

    mu, USB, LSB, Pc, Psb);


```

Procedure :

1. Open MATLAB and create a new script file.
2. Initialize the MATLAB workspace by clearing all variables, command window contents, and open figure windows using: `clc; clear; close all;`
3. Define the message signal amplitude (), message frequency (), carrier amplitude (), carrier frequency (), and sampling frequency ().
4. Generate the time vector required for signal simulation using the specified sampling frequency.
5. Generate the message signal using a sinusoidal waveform with frequency .
6. Generate the carrier signal using a sinusoidal waveform with frequency .
7. Calculate the modulation index () using:
8. Generate the Amplitude Modulated (AM) signal using the standard AM equation:
9. Demodulate the AM signal using the Hilbert Transform to obtain the envelope of the modulated signal.
10. Remove the DC component from the demodulated signal to recover the original message signal.
11. Compute the Fast Fourier Transform (FFT) of the AM signal to analyze its frequency spectrum.
12. Determine the Upper Sideband (USB) and Lower Sideband (LSB) frequencies using:
13. Calculate the carrier power and sideband power using:

14. Plot the message signal, carrier signal, AM signal, demodulated signal, frequency spectrum showing sidebands, and power distribution using MATLAB subplot commands.
15. Display the values of modulation index, sideband frequencies, carrier power, and sideband power in the MATLAB Command Window using the fprintf() function.
16. Observe and analyze the generated plots to verify the AM waveform characteristics, sideband frequencies, and power distribution.

OUTPUT (GRAPH)

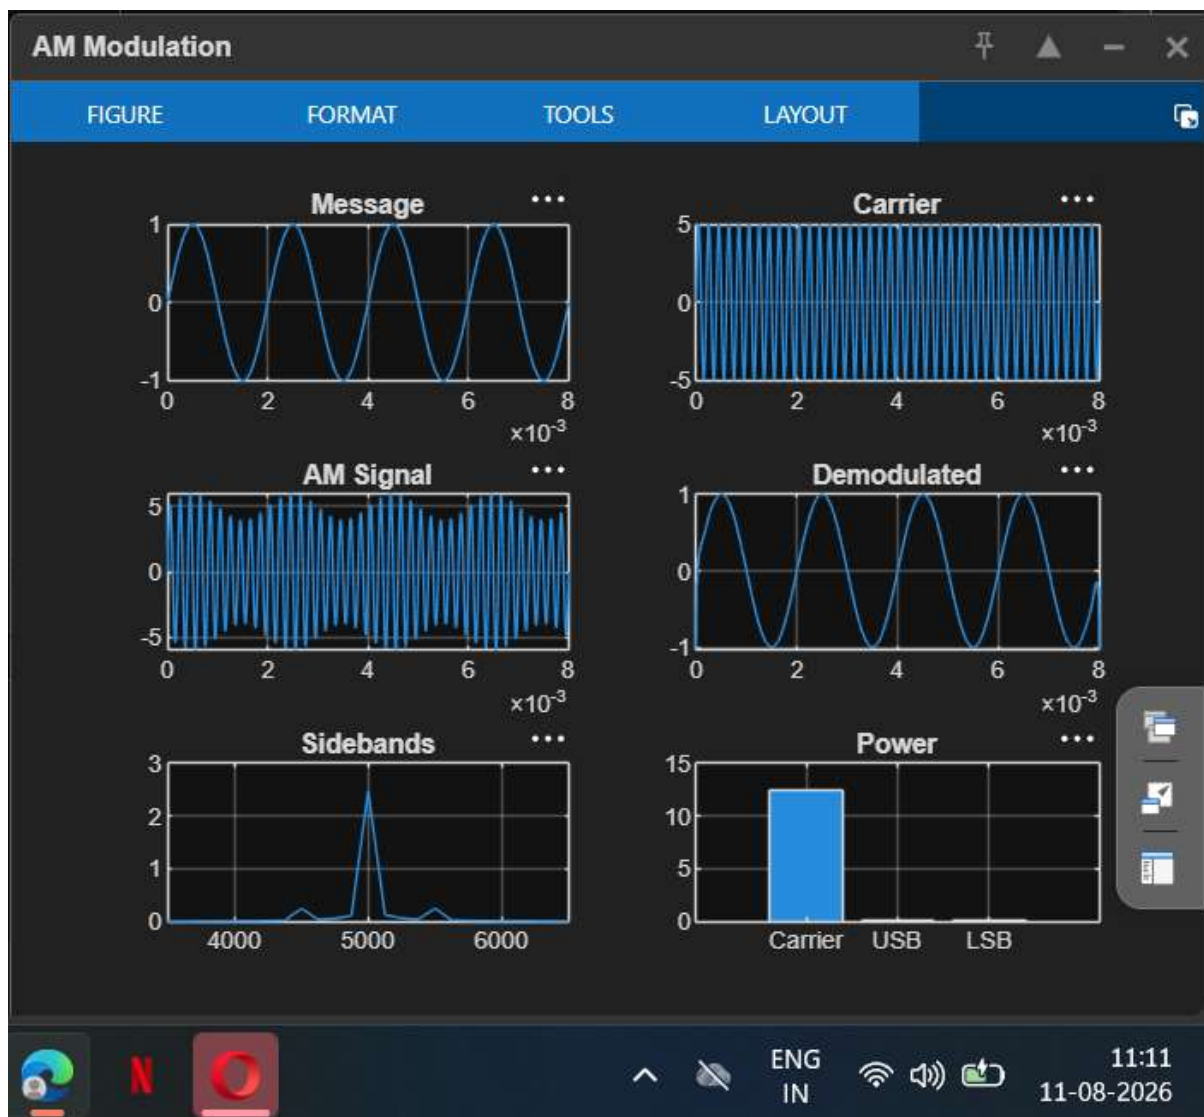

RESULT :

The AM signal was successfully generated and analyzed in MATLAB.

OBJECTIVE 2 :

To determine and verify the Upper Sideband (USB) and Lower Sideband (LSB) frequencies of the AM signal using frequency spectrum analysis in MATLAB.

Upper Sideband Frequency (USB)

USB Frequency = 55 Hz

Lower Sideband Frequency (LSB)

LSB Frequency = 45 Hz

RESULT :

i) Upper Sideband Frequency (USB) = 55 Hz

ii) Lower Sideband Frequency (LSB) = 45 Hz

OBJECTIVE 3

To calculate the carrier power, sideband power, and total transmitted power of the AM signal for a given modulation index using MATLAB.

SIDE BAND POWER

For an AM signal, the sideband power is calculated using the given modulation index and carrier power.

UPPER AND LOWER SIDE BAND POWER

- Upper Sideband Power (USB Power) = **0.125 W**
- Lower Sideband Power (LSB Power) = **0.125 W**

TOTAL SIDE BAND POWER

Total Sideband Power = 0.25 W

TOTAL TRANSMITTED POWER

Total Transmitted Power = 0.75 W

RESULT

i) Carrier Power = **0.5 W**

ii) Upper Sideband Power = **0.125 W**

iii) Lower Sideband Power = **0.125 W**

iv) Total Sideband Power = **0.25 W**

v) Total Transmitted Power = **0.75 W**