


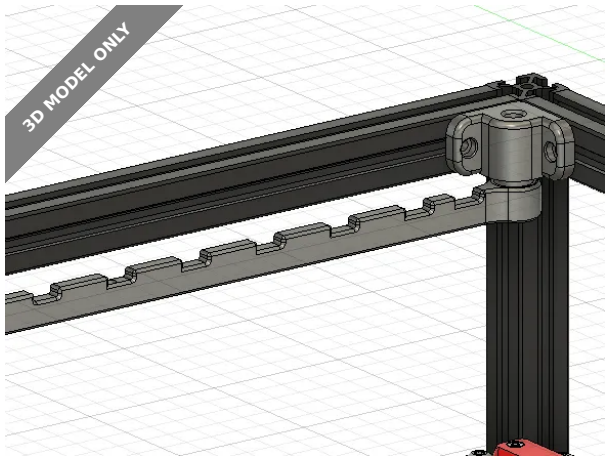

Voron Trident Swing Arm

 zeke-

[VIEW IN BROWSER](#)

updated 22. 5. 2025 | published 22. 5. 2025

Summary

Extrusion mountable swing-arm for Voron or other printers using extrusions

[3D Printers](#) > [Voron Parts & Upgrades](#)

Tags: [swing](#) [voron](#) [swingarm](#) [trident300](#)

For my Voron **Trident 300** I want to get rid of the cable-chains and go for umbilical. Unfortunately umbilical never worked out for me, as I wanted. I used a Tophat for my Trident, but was not happy with it (hard to seal, more air to heat, ...). With the swing-arm there is no more need for a Tophat.

Luckily I found the swing-arm from Prusa and I remixed it to be useable on a Trident. The base and the arm are fully printable (use supports).

For the assembly you need the following hardware:

- 2x F695-2RS Bearings (5 mm x 13 mm x 4 mm)
- 1x M5 Heatset-Insert (~9mm long)
- 1x M5x30
- 2x M3 Hammerhead/Rollin

On my assembly, the two bearings have friction - therefore you maybe can't fully tighten the screw and leave it a bit loose. Use some Loctite to not unscrew.

There is also a hole in the front of the arm, to use piano-wire and a hole for a heatset to lock the wire (not tested, because it works for me without the wire).

Important:

Please note, that you have to feed the PTFE-tube for your filament from the side (I drilled a whole in the side-panel).

Printed with Polymaker ASA, bearings have a good fit on my assembly.

At the moment I'm working on new version with smaller bearings and a second arm to prevent sagging of the arm. This version is fully working, at least for me.

Update:

22.05.2025: Added Step-File (had to redraw completly..)

This remix is based on



Prusa SwingArm - Open-Source release

by Prusa Research


Model files



base.stl



swing_arm.stl



swing_arm.f3d

License

This work is licensed under a
GNU



Lesser General Public License

- ✗ | Sharing without ATTRIBUTION
- ✓ | Remix Culture allowed
- ✓ | Commercial Use
- ✓ | Meets Open Definition