


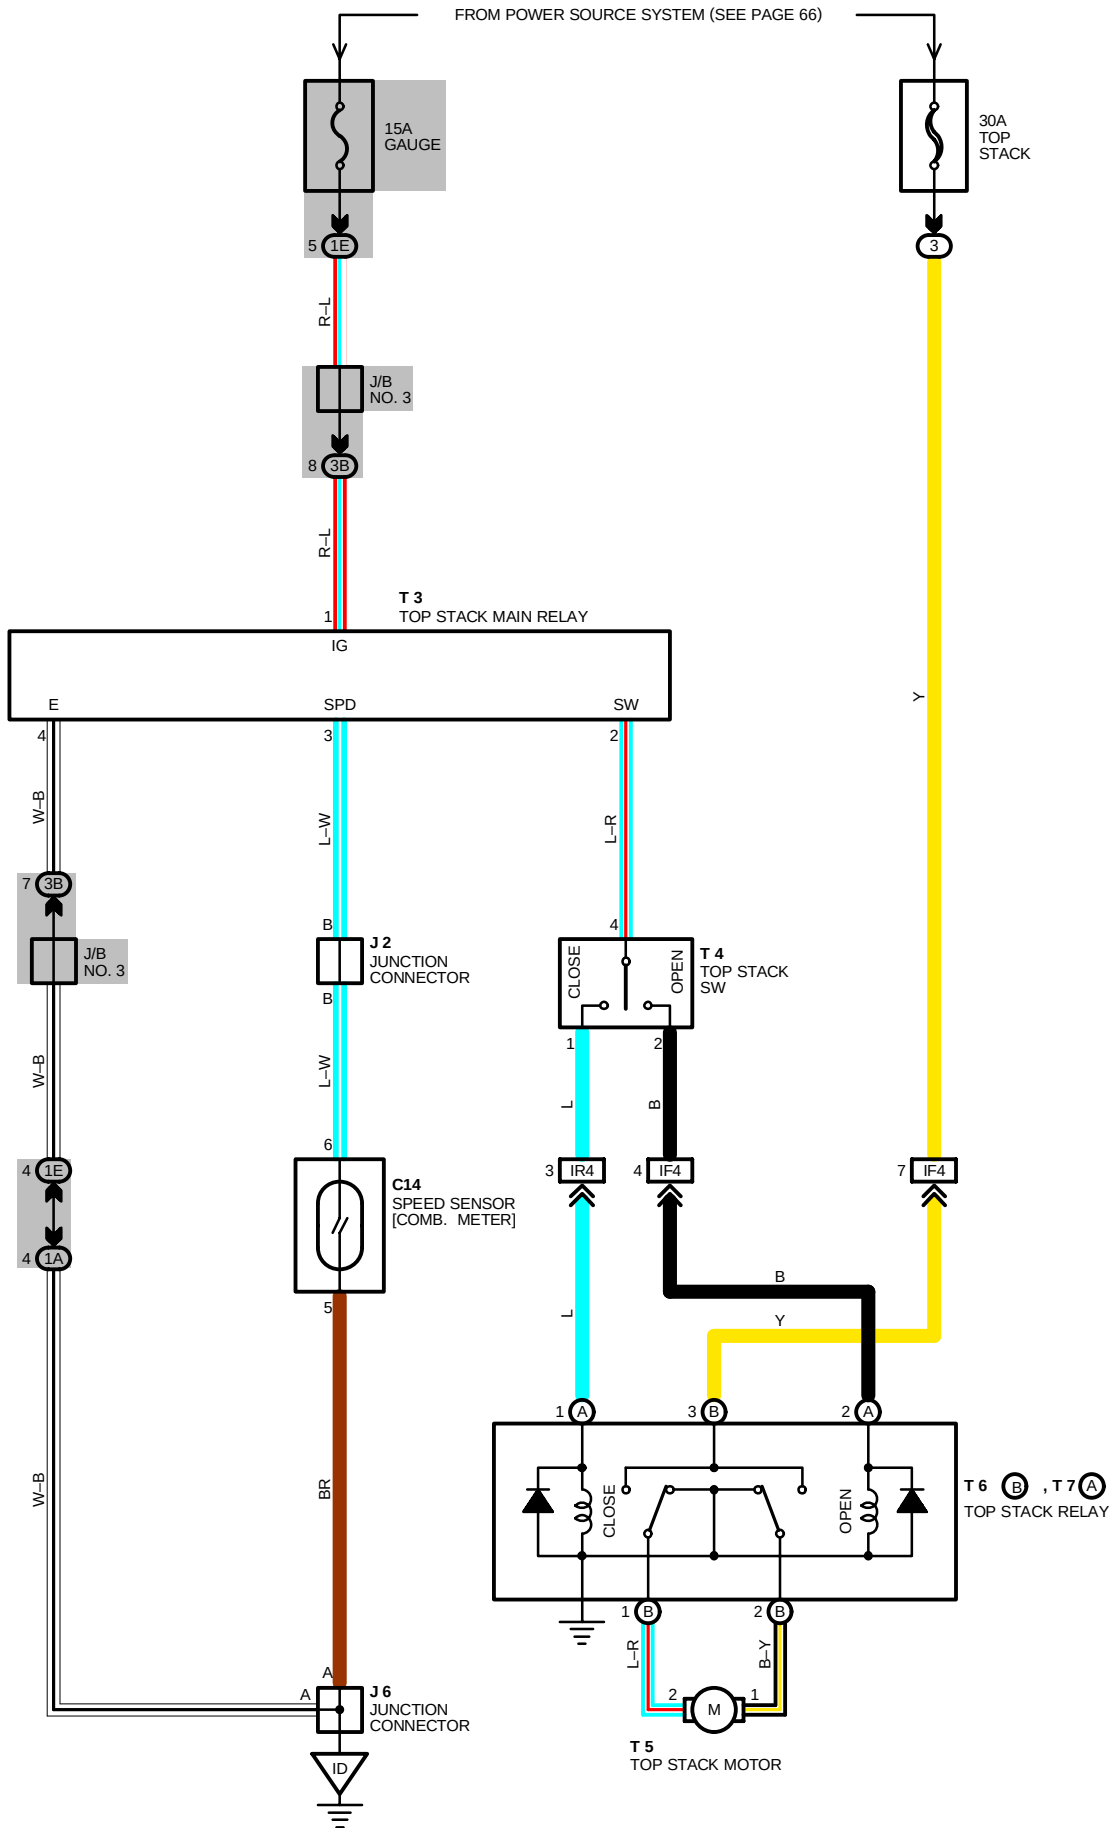

SERVICE HINTS

T 3 TOP STACK MAIN RELAY

- 1-GROUND : APPROX. 12 VOLTS WITH IGNITION SW AT **ACC** OR **ON** POSITION
- 3-GROUND : 4 PULSE WITH 1 ROTATION OF ROTOR SHAFT
- 4-GROUND : ALWAYS CONTINUITY

T 4 TOP STACK SW

- 4-2 : CLOSED WITH TOP STACK SW AT **OPEN** POSITION
- 4-1 : CLOSED WITH TOP STACK SW AT **CLOSE** POSITION

○ : PARTS LOCATION

CODE	SEE PAGE	CODE	SEE PAGE	CODE	SEE PAGE
C14	32	T 3	33	T 6	B 36
J 2	32	T 4	33	T 7	A 36
J 6	32	T 5	36		

○ : RELAY BLOCKS

CODE	SEE PAGE	RELAY BLOCKS (RELAY BLOCK LOCATION)
3	26	R/B NO. 3 (RIGHT KICK PANEL)

○ : JUNCTION BLOCK AND WIRE HARNESS CONNECTOR

CODE	SEE PAGE	JUNCTION BLOCK AND WIRE HARNESS (CONNECTOR LOCATION)
1A	20	COWL WIRE AND J/B NO. 1 (LEFT KICK PANEL)
1E		
3B	25	COWL WIRE AND J/B NO. 3 (BEHIND COMBINATION METER)

□ : CONNECTOR JOINING WIRE HARNESS AND WIRE HARNESS

CODE	SEE PAGE	JOINING WIRE HARNESS AND WIRE HARNESS (CONNECTOR LOCATION)
IF4	46	FLOOR WIRE AND COWL WIRE (LEFT KICK PANEL)

▽ : GROUND POINTS

CODE	SEE PAGE	GROUND POINTS LOCATION
ID	46	LEFT KICK PANEL

