
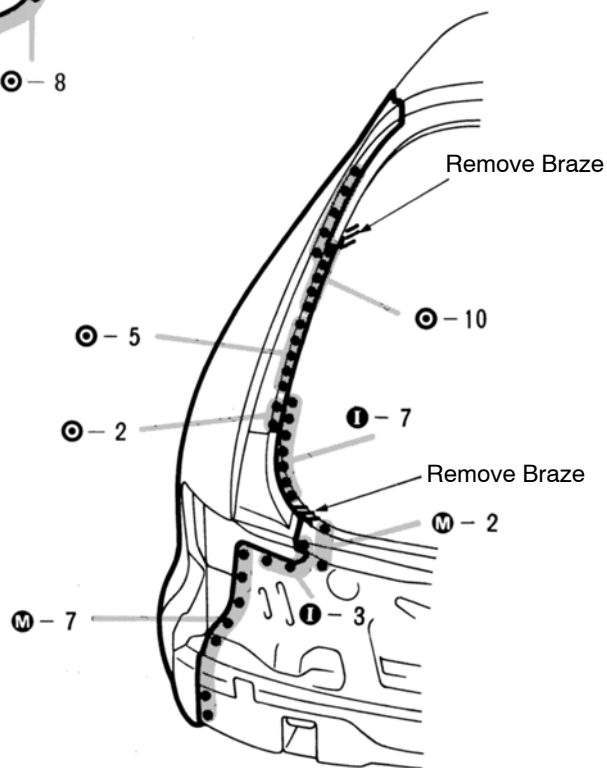
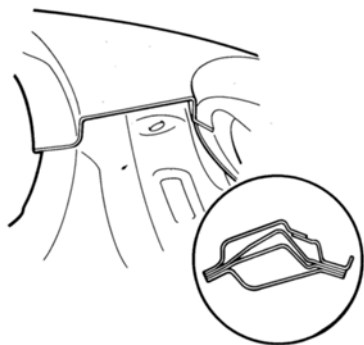
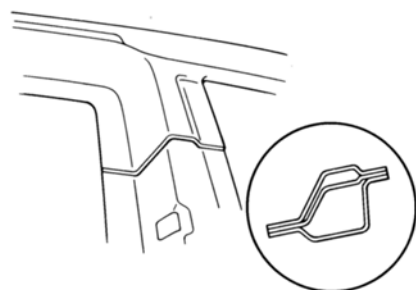
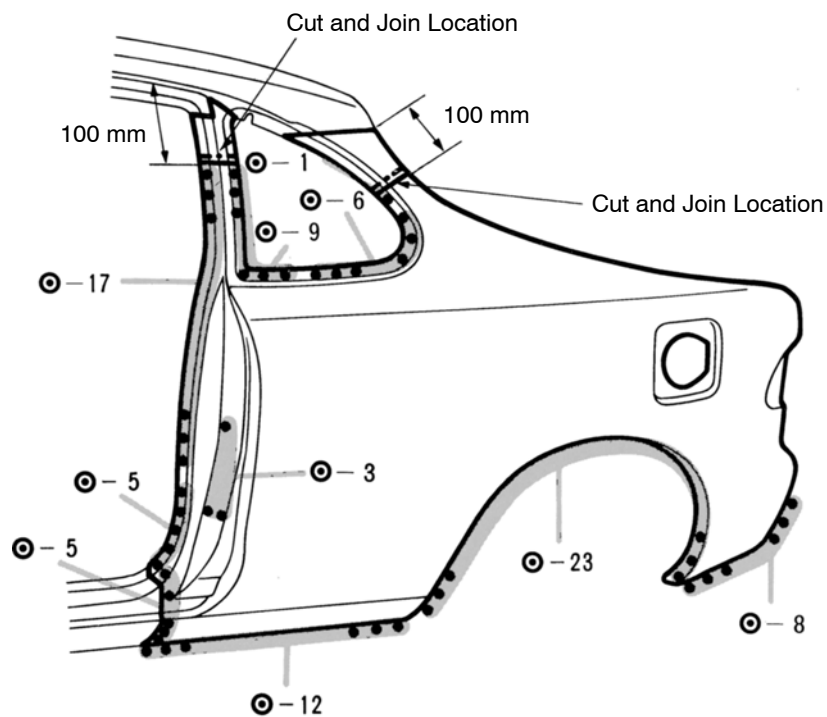


QUARTER PANEL (CUT): Lift back


REMOVAL

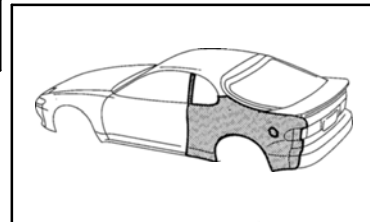

mm	in.
100	3.93

1. Cut and join the parts at the location shown above.

INSTALLATION

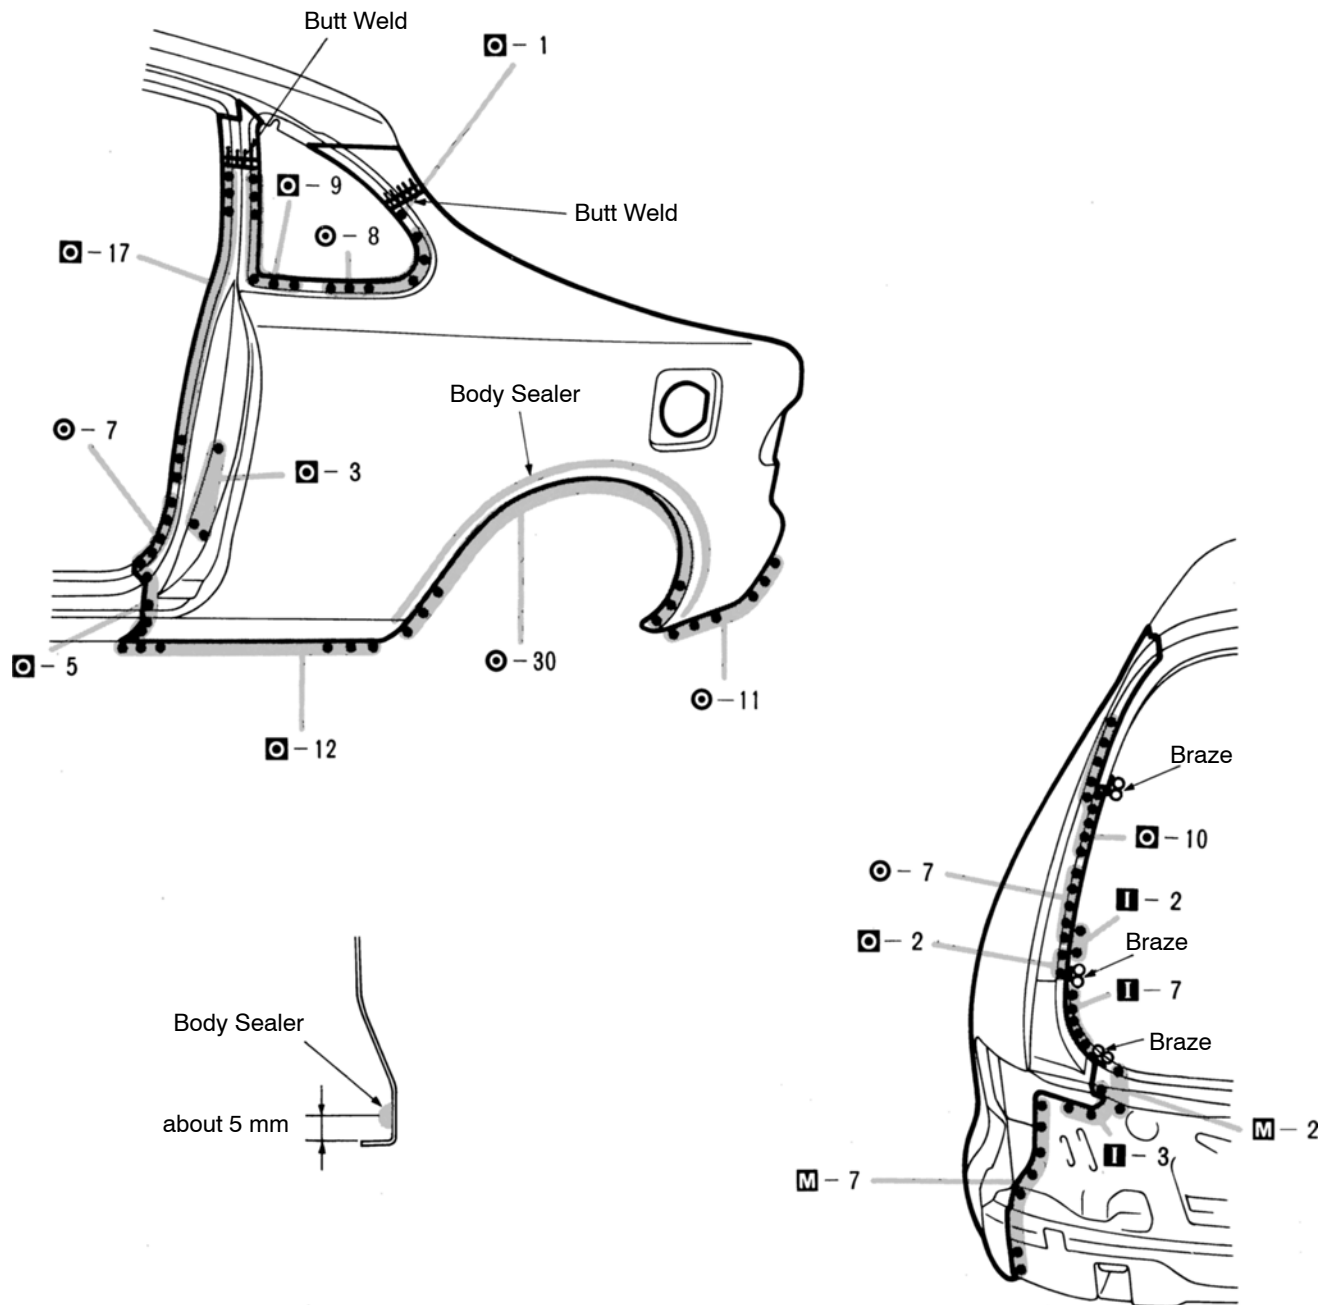

1. Before temporarily installing the new parts, apply body sealer to the wheel arch.

HINT:

- 1) Apply body sealer about 5 mm (0.20 in.) from the flange, avoiding any oozing.
- 2) Apply sealer evenly, about 3 – 4 mm (0.12 – 0.16 in.) in diameter.

- 3) For other sealing points, refer to section AR.
2. Temporarily install the new parts and check the fit of the back door and rear combination light.