REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	DG	13/10/26
B	Audit v3: F09 D-hole corners R3 (#272)	DG	16/10/26
C	R132 lid loft D62 x 6 (#273); first drawing issued (#280)	DG	16/10/26
D	D43.08 x 0.2 round relief at the HD34 flange seat: the flat starts 0.2 up, so the round root of the HD34 pilot (TE model) clears	DG	19/10/26

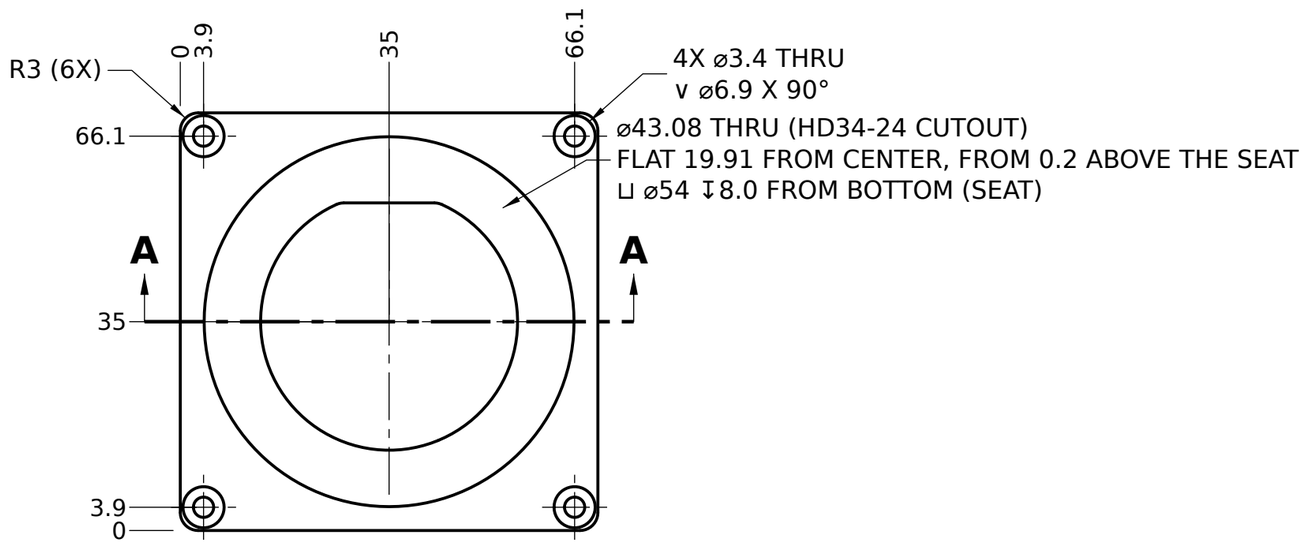

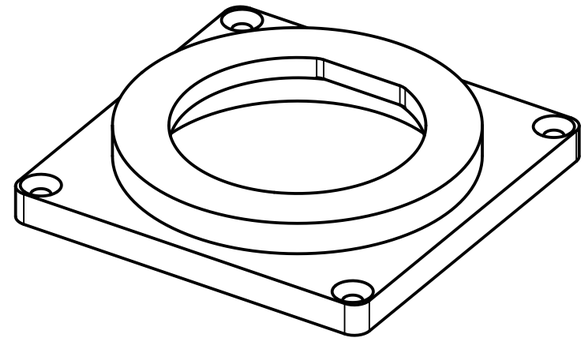

TRIMETRIC VIEW (SCALE 1:1)

SECTION A-A

NOTES:

1. 6061-T6 ALUMINUM. STOCK 8 x 75 x 75 PLATE; FACE BOTH SIDES TO 6.0. QTY 1 PER CAR.
2. THE BOTTOM FACE IS THE O-RING SEALING FACE: Ra 0.8, FLAT WITHIN 0.05, NO TOOL MARKS ACROSS THE SEAL PATH.
3. THE HD34-24-33PE CONNECTOR GOES THROUGH THE BIG HOLE; THE FLAT LINES IT UP. HOLD IT WITH PANEL NUT 112263-90 AND LOCKWASHER 112264-ZZ.
4. THE FIRST 0.2 OF THE BIG HOLE ABOVE THE ⌀54 SEAT IS FULL ROUND ⌀43.08 (NO FLAT), SO THE CONNECTOR'S ROUND COLLAR SEATS.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
CSB3 ENCLOSURE - LID

PART / DWG NO.	REV	MATERIAL
ST185-CSB3-102	**D.01**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-10-19	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\csb3\\CSB3_part_CSB3-Lid.step

3RD ANGLE