


REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	Claude	13/10/26
B	Holder v2 floor bosses: 4 M3 bosses out, 2 x D11 bosses for M6 (R126) (#267)	Claude	15/10/26
C	Audit v3: tab slots 6.6 x 10 (F01), bosses +1 (F02), spotface, tab corners R3 (F11), IN / OUT upright (#272)	Claude	16/10/26
D	N4: bosses to z 12.5, drill 5.0 x 11.5, M6 1.5 x D (R131) (#273); first engine drawing	Claude	16/10/26

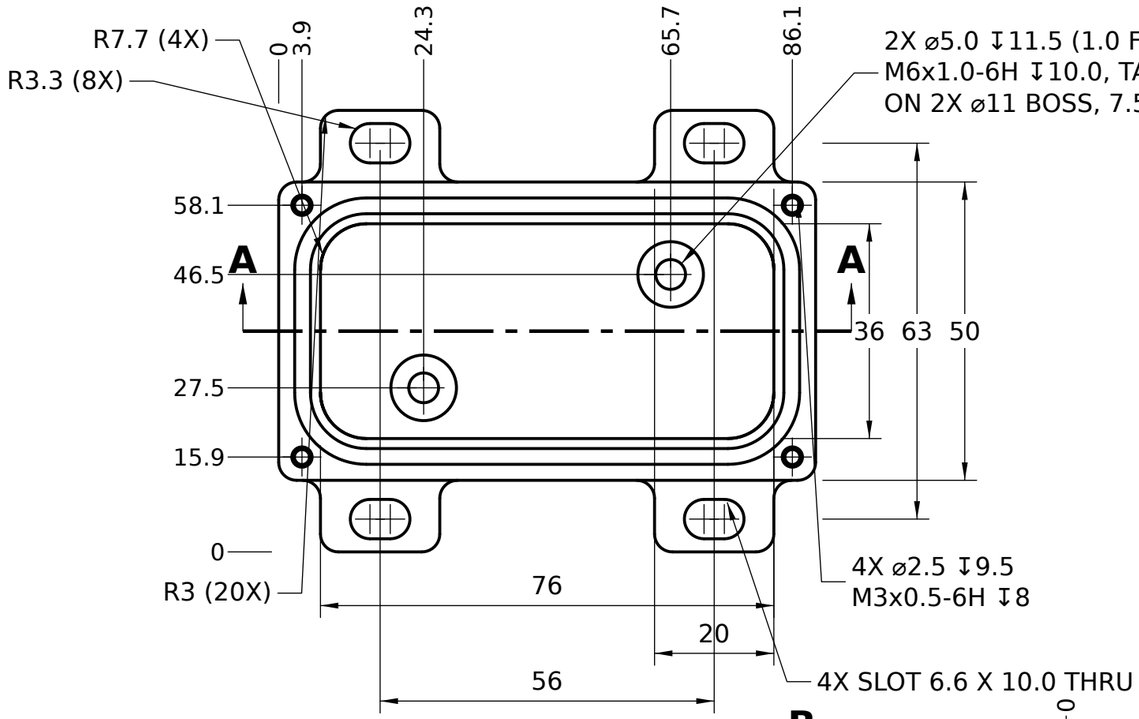


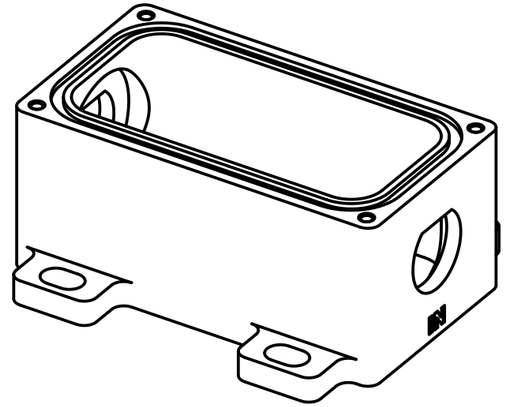

TRIMETRIC VIEW (SCALE 1:1.25)

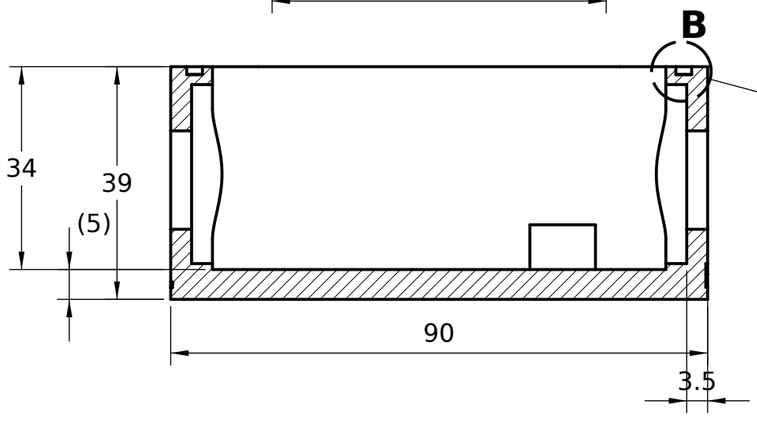

SECTION A-A

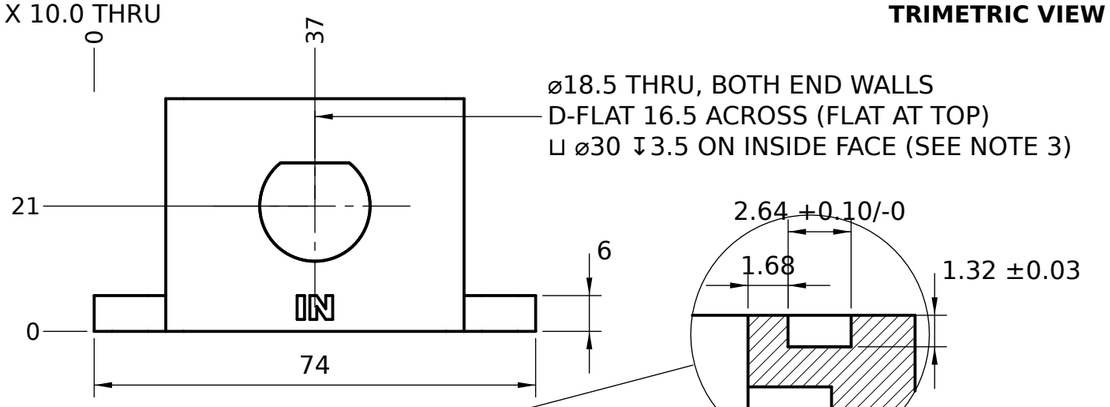

DETAIL B
SCALE 4:1

NOTES:

1. 6061-T6. STOCK 95 x 80 x 42 BILLET. QTY 2 PER CAR (FRONT + REAR), IDENTICAL.
2. O-RING GROOVE (DETAIL B): AS568-039 NBR70 FACE SEAL. GROOVE + LID FACE Ra 0.8, GROOVE CORNER R0.13-0.38.
3. ⌀30 x 3.5 SPOTFACE INSIDE EACH END WALL: BACK-COUNTERBORE THROUGH THE D-HOLE OR A 2ND SETUP.
4. BOSSES: M6 x 14 ISO 10642 ENGAGES 9.0 (1.5xD, R131). TAB CORNERS R3; FLOOR CORNERS SQUARE OK.
5. ENGRAVE IN (+X) / OUT (-X): ARIAL BLACK 4.0 HIGH, 0.3 DEEP, UPRIGHT FROM OUTSIDE.
6. EDGE BREAKS NOT MODELLED (R138): BREAK SHARP EDGES 0.2-0.4 EXCEPT GROOVE / SEAL FACE. SPOT TAPPED ENTRIES 90°.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
VRC ENCLOSURE - BODY

PART / DWG NO.	REV	MATERIAL
ST185-VRC-101	D	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\vrc\\VRC_part_VRC-Body.step

3RD ANGLE