REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	Claude	13/10/26

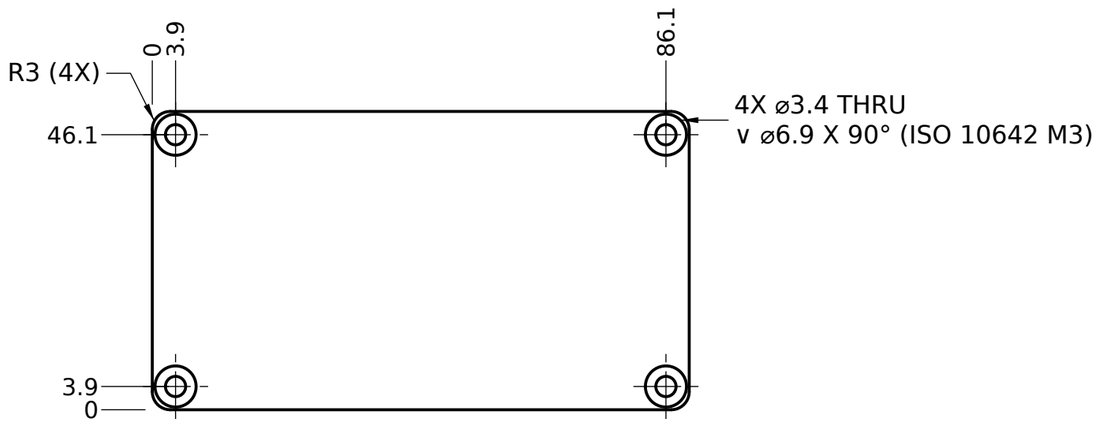

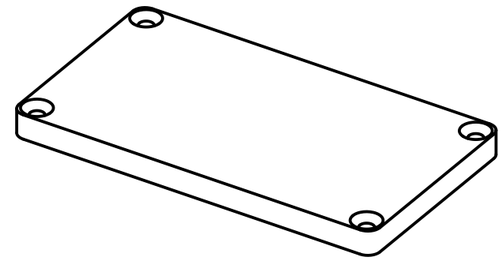

TRIMETRIC VIEW (SCALE 1:1.25)

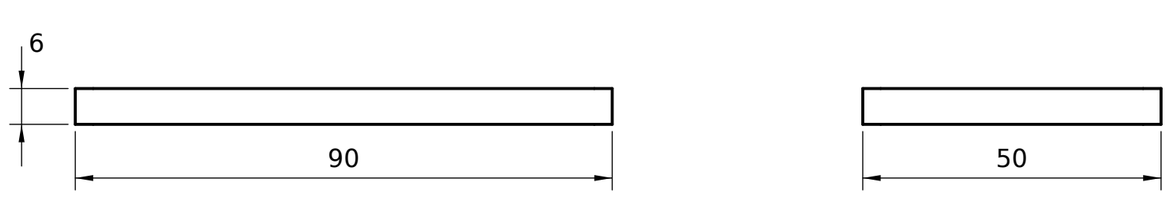

NOTES:

1. MATERIAL: 6061-T6 ALUMINUM. STOCK: 8 x 95 x 55 PLATE (FACE BOTH SIDES TO 6.0). QTY 2 PER CAR.
2. BOTTOM FACE IS THE O-RING SEALING FACE (AS568-039 IN THE BODY RIM, ST185-VRC-101): Ra 0.8, FLAT WITHIN 0.05, NO TOOL MARKS ACROSS THE SEAL PATH. LID CLOSES METAL-TO-METAL ON THE RIM.
3. EDGE BREAKS NOT MODELLED (R138): BREAK SHARP EDGES 0.2-0.4 EXCEPT THE SEALING FACE.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
VRC ENCLOSURE - LID

PART / DWG NO.	REV	MATERIAL
ST185-VRC-102	**A**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\vrc\\VRC_part_VRC-Lid.step

3RD ANGLE