



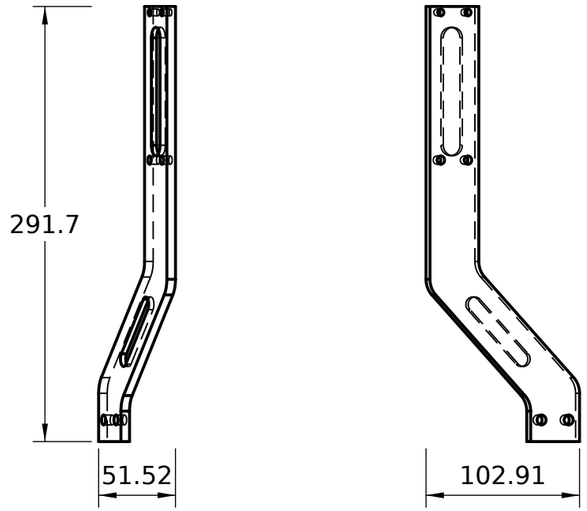



TRIMETRIC VIEW (SCALE 1:2.5)

NOTES:

1. 6061-T6 BILLET. MODEL build123d fuel_hanger.py REV H.
2. EDGES NOT MODELLED (R138): BREAK SHARP EDGES 0.2-0.4; SEAL FACE / SPOT RIMS 0.3 MAX.
3. SPOT TAPPED ENTRIES 90°, ⌀ = THREAD MAJOR.
4. STRUT POCKETS: FLOOR-TO-WALL EDGES ARE END-MILL FLOOR EDGES - SQUARE CUTTER CORNER OK.
5. FIT THE BULKHEAD NUTS BEFORE THE STRUT.

REV	DESCRIPTION	DATE	BY
H	LUG MADE INTEGRAL (N6)	2026-10-17	SC

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
FUEL HANGER - STRUT

PART / DWG NO.	REV	MATERIAL
ST185-FH-103	**H**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:4	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE: st185-link-ecu-config\cad\fuel-hanger\fuel-hanger-strut.step

3RD ANGLE