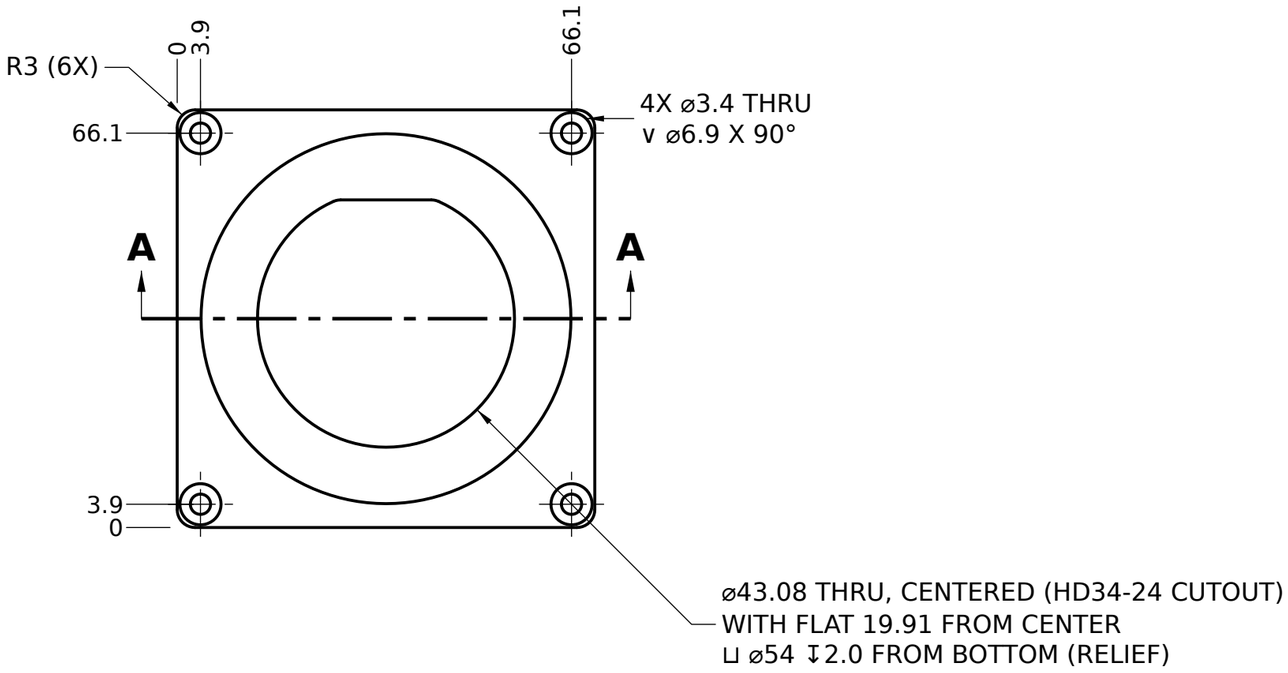

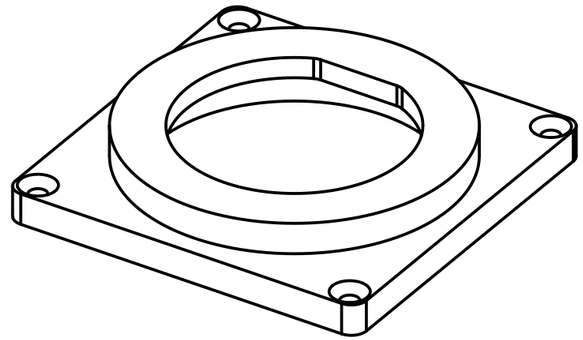

TRIMETRIC VIEW (SCALE 1:1)

SECTION A-A

NOTES:

1. MATERIAL: 6061-T6 ALUMINUM. STOCK: 8 x 75 x 75 PLATE (FACE BOTH SIDES TO 6.0).
2. BOTTOM FACE IS THE O-RING SEALING FACE: Ra 0.8, FLAT WITHIN 0.05, NO TOOL MARKS ACROSS THE SEAL PATH.
3. HD34-24-33PE RECEPTACLE MOUNTS THROUGH THE CUTOUT WITH PANEL NUT 112263-90 + LOCKWASHER 112264-ZZ; FLAT KEYS THE RECEPTACLE.
4. BREAK ALL SHARP EDGES 0.2-0.4 EXCEPT SEALING FACE.

REV	DESCRIPTION	DATE	BY
C	REISSUE WITH BODY REV C (LID UNCHANGED)	2026-10-17	SC

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
CSB3 ENCLOSURE - LID

PART / DWG NO.	REV	MATERIAL
ST185-CSB3-102	**C**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\csb3\\CSB3_part_CSB3-Lid.step

3RD ANGLE