


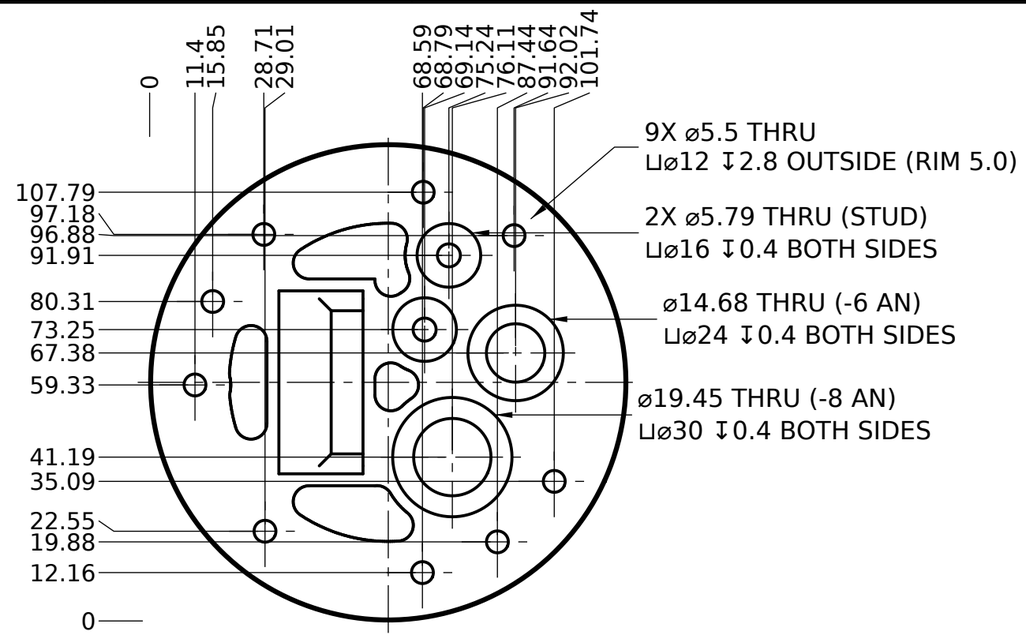


REVISIONS			
REV	DESCRIPTION	BY	DATE
B	Fairsolid rev 2: 1/4 in. flat panel for the AN bulkheads, lug 8 mm thick	unknown	14/10/26
C	Fairsolid rev 3: plain clearance holes + sealing faces for the JXSS035 bulkheads, 2 isolated pump studs	unknown	14/10/26
D	Fairsolid rev 6: tank-side relief pocket 3.0 deep	unknown	14/10/26
E	Fairsolid rev 7: lug block bolted on, nothing machined through	unknown	14/10/26
F	Fairsolid rev 8: lug-block M5 holes tapped through (not used)	Claude	17/10/26
G	Lug machined integral with the flange (N6 option 2), M5 screws + dowels deleted; first drawing issued (#279)	SteveCAD	17/10/26

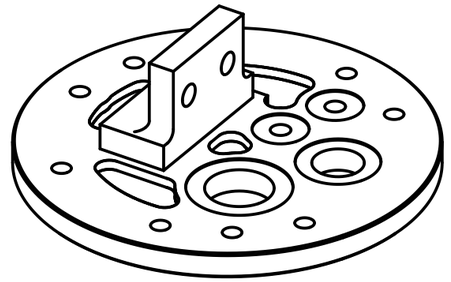

TRIMETRIC VIEW (SCALE 1:1.67)

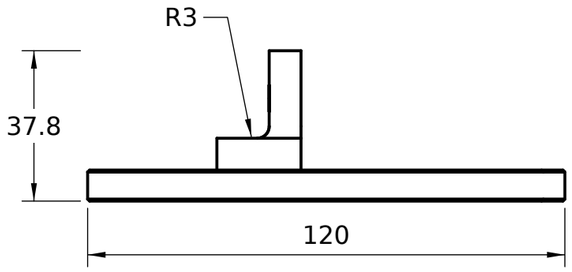

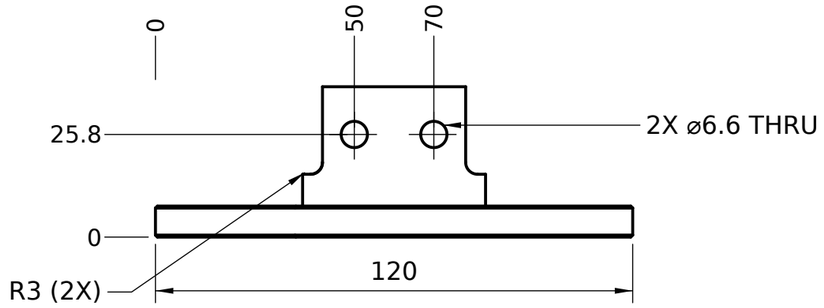

NOTES:

1. 6061-T6 BILLET. MODEL build123d fuel_hanger.py. REV = THIS PART'S RELEASE COUNT (cad/DRAWING-REVS.md).
2. EDGES NOT MODELLED (R138): BREAK SHARP EDGES 0.2-0.4; SEAL FACE / SPOT RIMS 0.3 MAX.
3. SPOT TAPPED ENTRIES 90°, ⌀ = THREAD MAJOR.
4. ONE BILLET: FLANGE + LUG (REPLACES FH-101 REV F + FH-102 REV A). NO M5 SCREWS, NO DOWELS. 13 THRU-HOLES ONLY; NOTHING ELSE BREAKS THE SEALING FACE.
5. SPOT FACES Ra 1.6 FLAT. UPRIGHT-TO-BASE R3. OPS: TANK FACE, OUTSIDE FACE, SIDE (⌀6.6).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
FUEL HANGER - FLANGE (INTEGRAL LUG)

PART / DWG NO.	REV	MATERIAL
ST185-FH-101	G	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE: st185-link-ecu-config\cad\fuel-hanger\fuel-hanger-flange.step

3RD ANGLE