


BQF-055

BOOSTER MAGNET REPORT

Results		
Date	15/04/2016	
Hour	10:31:30	
Temperature [°C]	21.6	
Number of Measurements	17	
Main Coil Current [A]	(130.0065 ± 0.0004)	
Trim Coil Current [A]	(0 ± 0)	
Integrated Gradient [T]	(-4.82497 ± 0.00001)	
Magnet Center Offset X [μm] - (< ±160.0)	(-14.45 ± 0.05)	
Magnet Center Offset Y [μm] - (< ±160.0)	(-13.36 ± 0.06)	
Roll [mrad] - (< ±0.8)	(-5.33 ± 0.03) x E-1	
Electric Parameters	1	
Indutance [mH]	8.327	
Voltage [V]	0.485	
Resistance [m Ω]	3.731	
Main Coil Number of Turns	26.25	

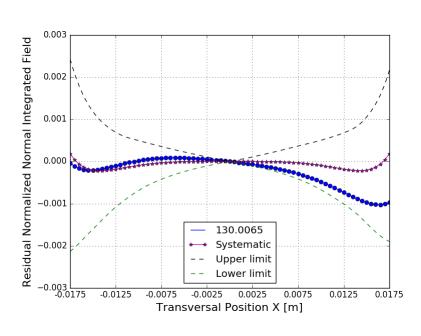

	Normalized	Normalized			
n	Normal Normal Multipoles x=17.5 mm [T.m ⁽²⁻ⁿ⁾]	Skew Multipoles x=17.5 mm [T.m ⁽²⁻ⁿ⁾]			
			1 (dipole)	(-8.26 ± 0.03) x E-4	(-7.63 ± 0.04) x E-4
			2 (quadrupole)	(1.000000 ± 0.000003)	(-1.067 ± 0.002) x E-3
			3 (sextupole)	(-4.26 ± 0.04) x E-4	(-6.89 ± 0.03) x E-4
			4	(-3.63 ± 0.03) x E-4	(1.27 ± 0.06) x E-4
5	(-5.6 ± 0.4) x E-5	(-2.3 ± 0.5) x E-5			
6	(-1.175 ± 0.003) x E-3	(5.1 ± 37.0) x E-7			
7	(6.5 ± 0.4) x E-5	(6 ± 5) x E-6			
8	(-3 ± 5) x E-6	(-3.6 ± 0.4) x E-5			
9	(-3.9 ± 0.3) x E-5	(4 ± 7) x E-6			
10	(1.124 ± 0.004) x E-3	(-1.8 ± 0.5) x E-5			
11	(4 ± 4) x E-6	(-1.6 ± 0.4) x E-5			
12	(7 ± 4) x E-6	(1.0 ± 0.4) x E-5			
13	(-8 ± 5) x E-6	(1.9 ± 0.3) x E-5			
14	(-9.4 ± 0.2) x E-5	(-1.7 ± 0.7) x E-5			
15	(-7 ± 3) x E-6	(-1 ± 1) x E-5			
	I				

