


NT48A08 NT48B20 NT48C32 MANUAL

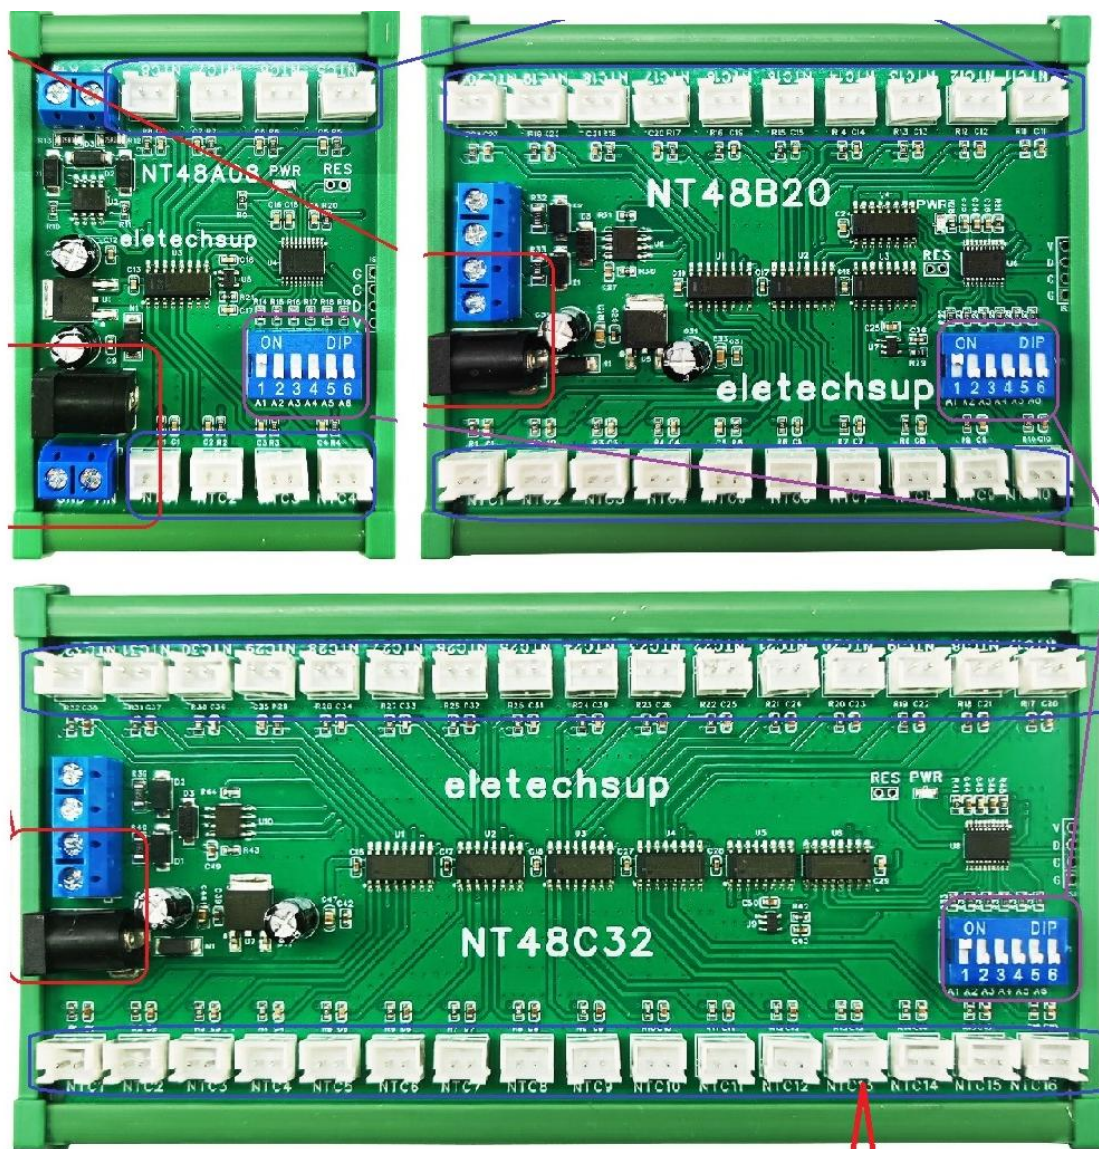

Features:

- 1: Operating Voltage : DC 7-25V(DC 9V 12V 15V 24V)
- 2: Operating Current :10-30MA(dependent on the number of external NTCs)
- 3: MODBUS RTU Command support 03 04 06 16 function code
- 4: The default baud rate is 9600BPS, the baud rate can be selected by command 2400 4800 19200 38400 57600 115200BPS
- 5 You can choose the parity mode is no parity, even parity and odd parity
- 6:Adapted sensor:10K B3950 1% NTC thermistor, Up to 8/20/32 NTC sensors can be connected at the same time
- 7:Temperature measurement range (using our NTC sensor): -20 ° C to +125 ° C.
- 8:Temperature measurement accuracy (using our NTC sensor): 1%.
- 9 Only Board Size: 8CH 72*55*15MM,20CH 99*72*15MM,156*72*15MM
- 10 With DIN Case Size: 8CH 87*57*34MM,20CH 102*87*34MM,159*87*34MM

11 Only Board Weight: 8CH 23g,20CH 38g,32CH 56g

12 With DIN Case Weight:8CH 73g,20CH 114g,32CH 171g

NT48A08 NT48B20 NT48C32 can be used to measure temperature with NTC, and it can also be used to measure common resistance value. Temperature measurement range: -40-125℃;Resistance measurement range: 1K-100K Ω .

Modbus RTU Command Please refer to : "NT48A08 NT48B20 NT48C32 MODBUS RTU Command"

NTC sensor specifications:

Product Name: 5*25mm NTC Waterproof Probe

Total length : 50CM

Resistance value: 10K

Resistance accuracy: $\pm 1\%$

Resistance B value: $3950 \pm 1\%$

Temperature range: -20 °C -125 °C

Wire size: 2651 26# parallel line temperature 105 °C


Plug model: XH2.54-2P

Note:


This module does not have an NTC sensor. The NTC sensor needs to be purchased separately (10K B3950 1%);The module's measured resistance value is 1%, and the theoretical temperature range is -273s~200°C. The final temperature measurement accuracy and temperature range are determined by NTC thermistor.

Working power interface:DC 7-25V
(choose one of the two interfaces)

XH2.54 NTC probe interface

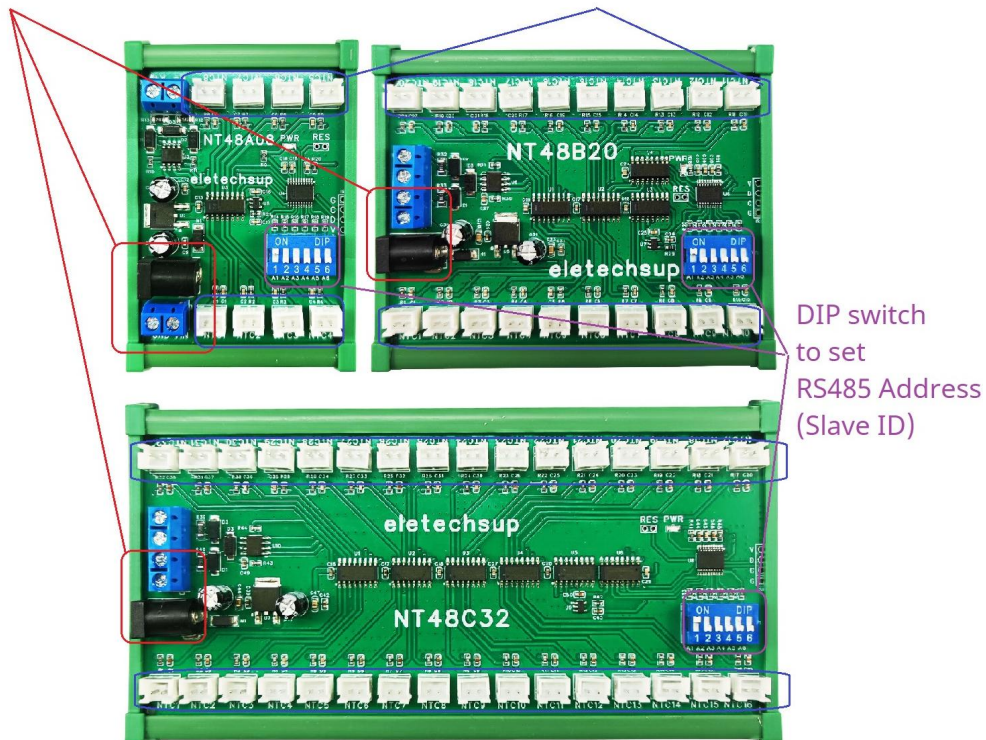

Wiring diagram:

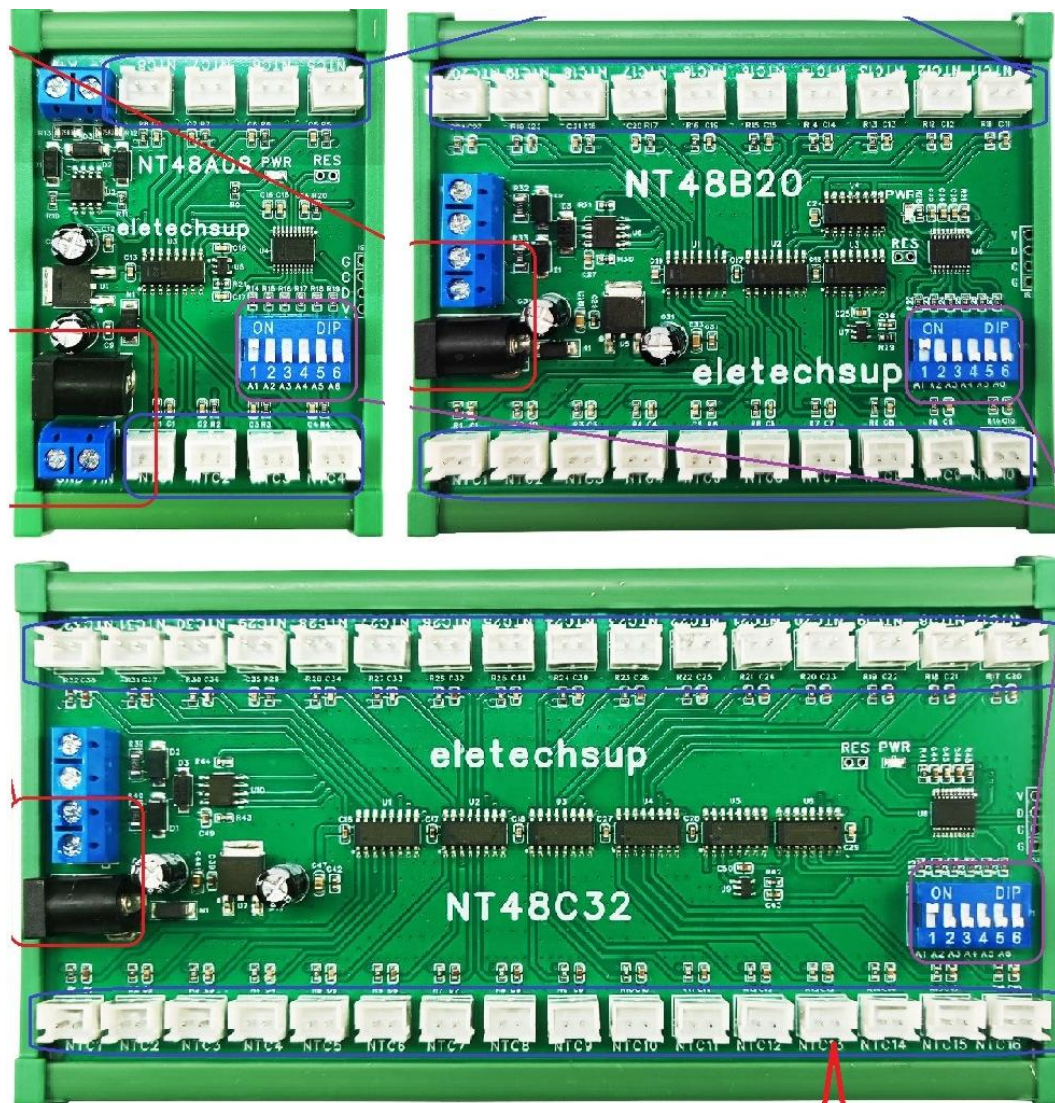


It is recommended that the NTC line length should not exceed 10 meters

10K B3950 1% NTC
Temperature Sensor



←XH2.54 2P Male

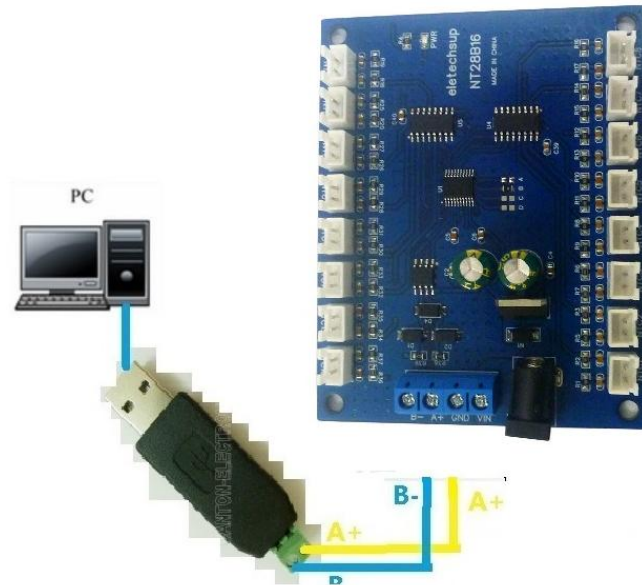


Modbus Command , up to 247 devic

Slave ID 1

Slave ID 2

Slave ID 3

Slave ID 247

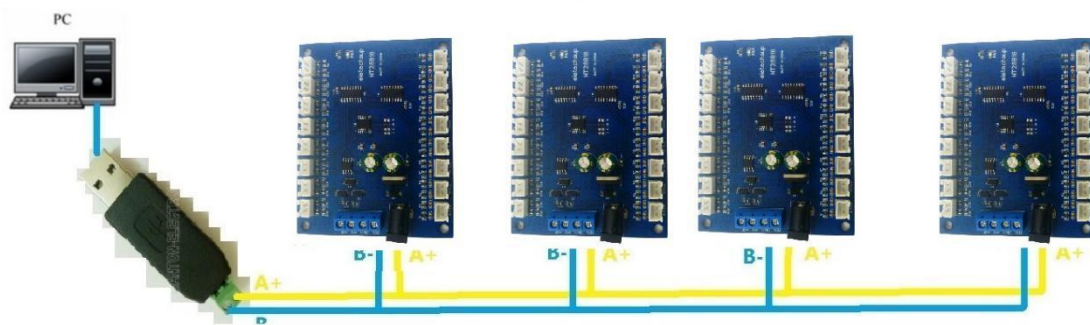

Modbus Command , up to 247 devic

Slave ID 1

Slave ID 2

Slave ID 3

Slave ID 247

