Exp: 13 Network forensics with PCAP Xray tool 8/10/26

AIM:

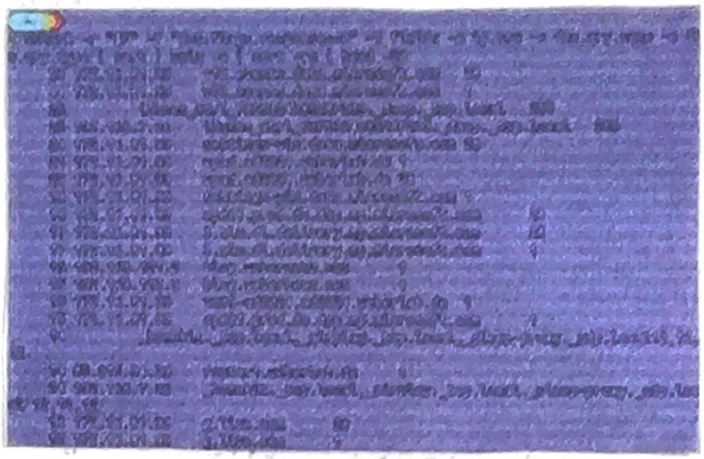
To perform network forensics by analyzing PCAP files with X-ray tool.

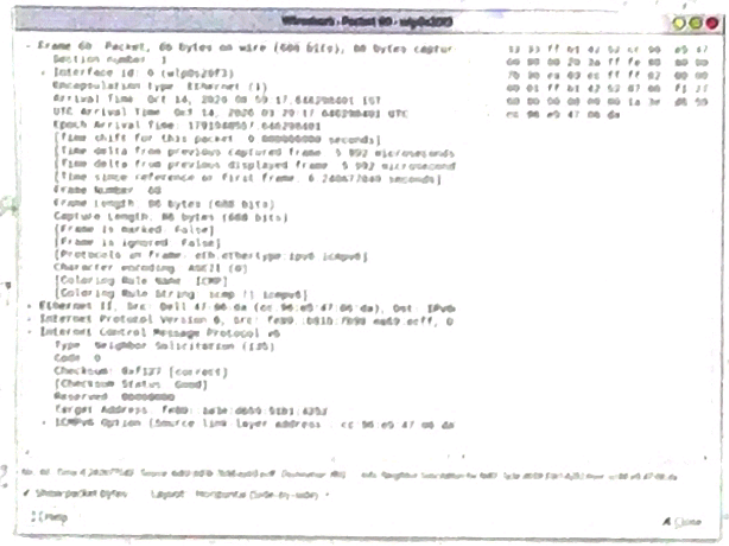
PROCEDURE:

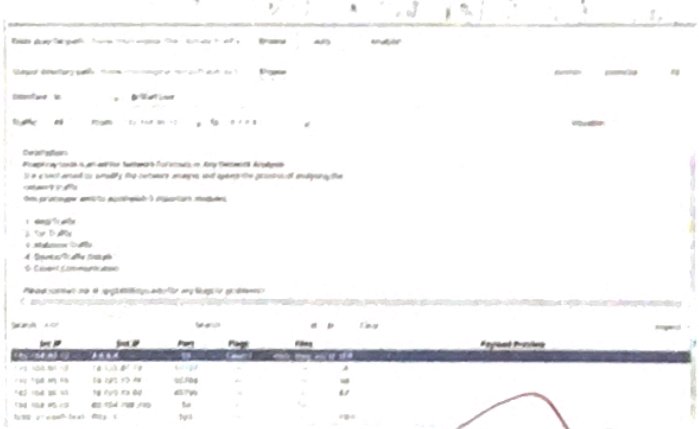
1. Open web browser and visit PCAP X-ray website.
2. Upload sample PCAP file.
3. Wait for file analysis to complete.
4. View dashboard to check packet details and network protocols.
5. Examine the source & destination IP addresses.
6. Check conversations between network hosts.
7. Inspect transferred files and available credentials.
8. Identify any suspicious network activities.
9. Generate & save the analysis report.

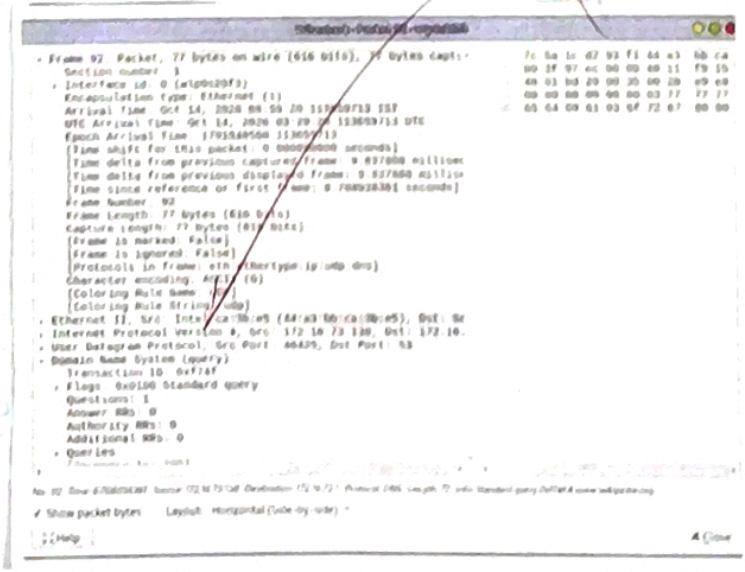
RESULT:

Hence, the Network forensics with PCAP Xray tool was successful.




Wireshark · Packet 68 · wlp0s20f3
Frame 68: Packet, 86 bytes on wire (688 bits), 86 bytes captur
Section number: 1
Interface id: 0 (wlp0s20f3)
Encapsulation type: Ethernet (1)
Arrival Time: Oct 14, 2026 08:59:17.646298401 IST
UTC Arrival Time: Oct 14, 2026 03:29:17.646298401 UTC
Epoch Arrival Time: 1791048957.646298401
[Time shift for this packet: 0.000000000 seconds]
[Time delta from previous captured frame: 5.992 microseconds]
[Time delta from previous displayed frame: 5.992 microseconds]
[Time since reference or first frame: 6.240477849 seconds]
Frame Number: 68
Frame Length: 86 bytes (688 bits)
Capture Length: 86 bytes (688 bits)
[Frame is marked: False]
[Frame is ignored: False]
[Protocols in frame: eth:ethertype:ipv6:icmpv6]
Character encoding: ASCII (0)
[Coloring Rule Name: ICMP]
[Coloring Rule String: icmp || icmpv6]
Ethernet II, Src: Dell_47:06:da (cc:96:e5:47:06:da), Dst: IPv6
Internet Protocol Version 6, Src: fe80::0815:7890:ea69:ecff, D
Internet Control Message Protocol v6
Type: Neighbor Solicitation (135)
Code: 0
Checksum: 0xf127 [correct]
[Checksum Status: Good]
Reserved: 00000000
Target Address: fe80::1a3e:d0b9:5181:425d
ICMPv6 Option (Source link-layer address : cc:96:e5:47:06:da
33 33 ff 81 42 5d cc 96 e5 47
00 00 00 20 3a ff fe 80 00 00
7b 90 ea 69 ec ff ff 02 00 00
00 01 ff 81 42 5d 87 00 f1 27
00 00 00 00 fe 80 00 00 1a 3e d0 59
cc 96 e5 47 06 da
Show packet bytes
Layout: Horizontal (side-by-side)
Help
Close


Dst IP
Port
Flags
Payload Preview


Frame 92: Packet, 77 bytes on wire (616 bits), 77 bytes capt
Section number: 1
Interface id: 0 (wlp0s20f3)
Encapsulation type: Ethernet (1)
Arrival Time: Oct 14, 2026 08:59:20.113659713 IST
UTC Arrival Time: Oct 14, 2026 03:29:20.113659713 UTC
Epoch Arrival Time: 1791048560.113659713
[Time shift for this packet: 0.000000000 seconds]
[Time delta from previous captured frame: 9.037000 millisec
[Time delta from previous displayed frame: 9.037000 millis
[Time since reference or first frame: 8.708926301 seconds]
Frame Number: 92
Frame Length: 77 bytes (616 bits)
Capture Length: 77 bytes (616 bits)
[Frame is marked: False]
[Frame is ignored: False]
[Protocols in frame: eth:ethertype:ip:udp:dns]
Character encoding: ASCII (0)
[Coloring Rule Name: UDP]
[Coloring Rule String: udp]
Ethernet II, Src: Intel_ca:5b:e5 (84:a3:6b:ca:5b:e5), Dst: Br
Internet Protocol Version 4, Src: 172.16.73.130, Dst: 172.16.
User Datagram Protocol, Src Port: 46435, Dst Port: 53
Domain Name System (query)
Transaction ID: 0xf16f
Flags: 0x0100 Standard query
Questions: 1
Answer RRs: 0
Authority RRs: 0
Additional RRs: 0
Queries
fc ba 1c d7 93 f1 84 a3 6b ca
00 1f 97 ec 00 00 40 11 f9 15
ac 10 49 82 ac 10 49 02 b5 63
00 35 00 0b 00 00 f1 6f 01 00
00 01 00 00 00 00 00 00 03 77 77 77
65 64 69 61 03 6f 72 67 00 00
Show packet bytes
Layout: Horizontal (side-by-side)
Help
Close