

Milling


Operating Parameters

[Watch Video Here](#)




[Watch Video Here](#)


Peripheral (Slab, Side) Milling

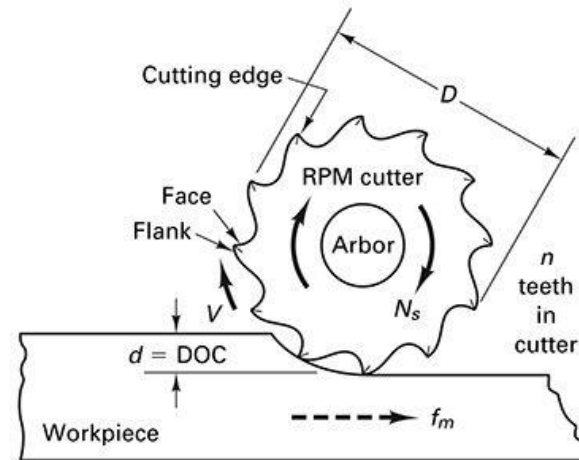

(b) Slab milling—multiple tooth

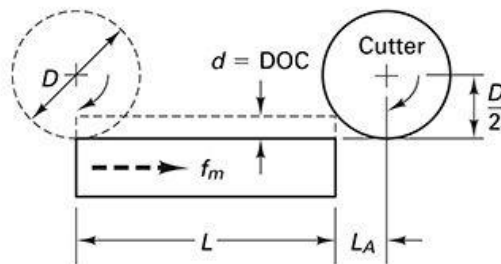


(c) Allowances for cutter approach

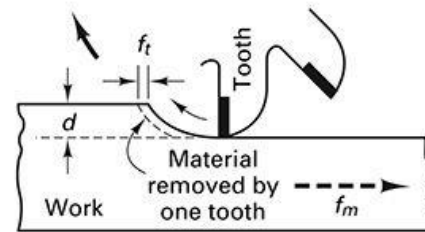

(d) Feed per tooth

Peripheral (Slab, side) Milling

Cutter rotation is for Up Milling

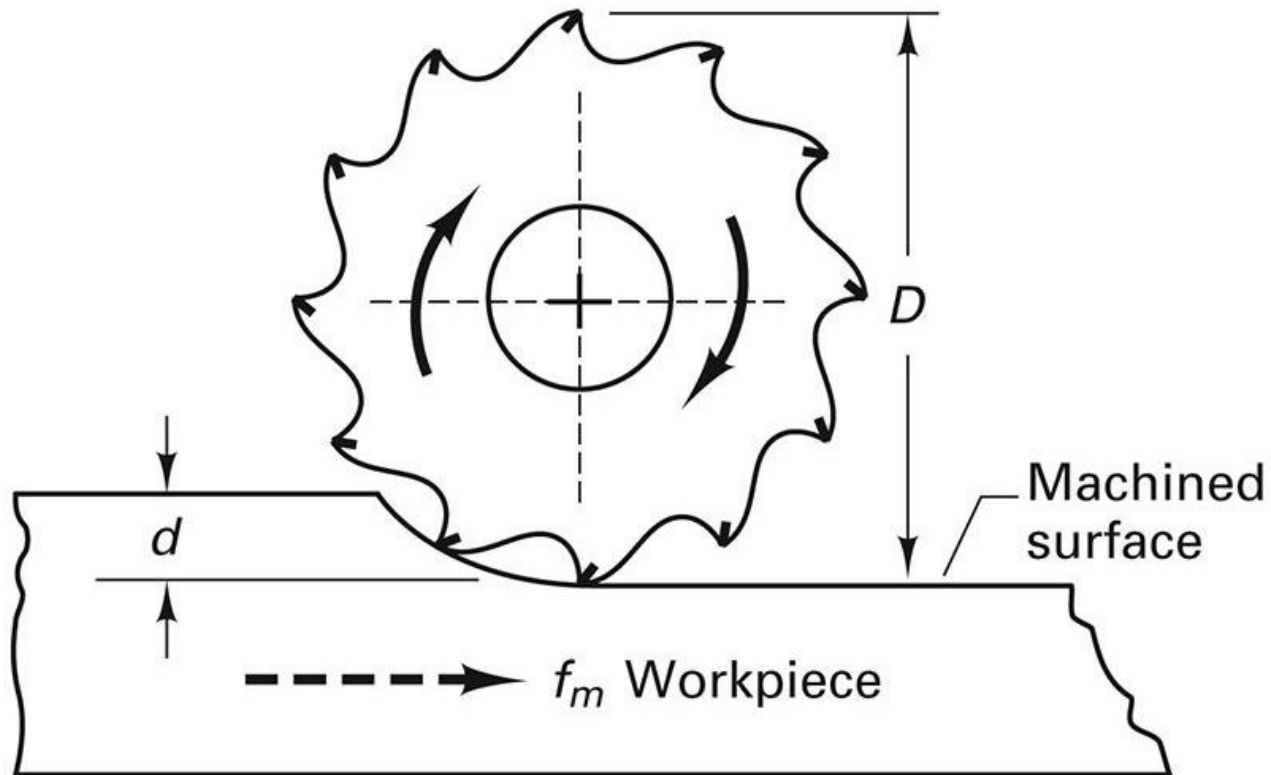

Cutting Parameters:


surface parallel to axis of cutter

- Cutting speed, $V = \pi D N / 12$ (ft/min)
- Table feed rate, $f_m = f_t N n$ (in/min)
- Material removal rate, MRR


$$MRR = L W t / T_c \quad \text{or} \quad MRR = W t f_m$$

- t - depth of cut N - RPM
- D - dia. of cutter f_t - feed per tooth
- n - no. of teeth L - length of cut
- W - width of cut T_c - cutting time
- V - surface ft/min



Face (End) Milling

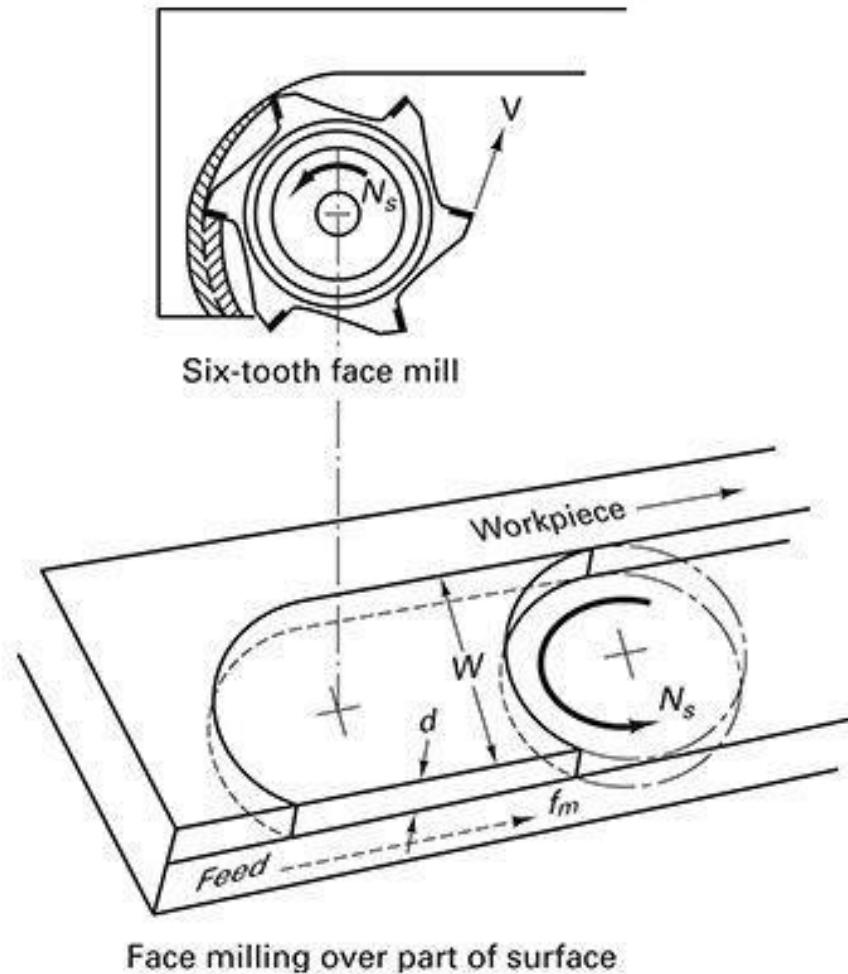


Face Milling (from above)

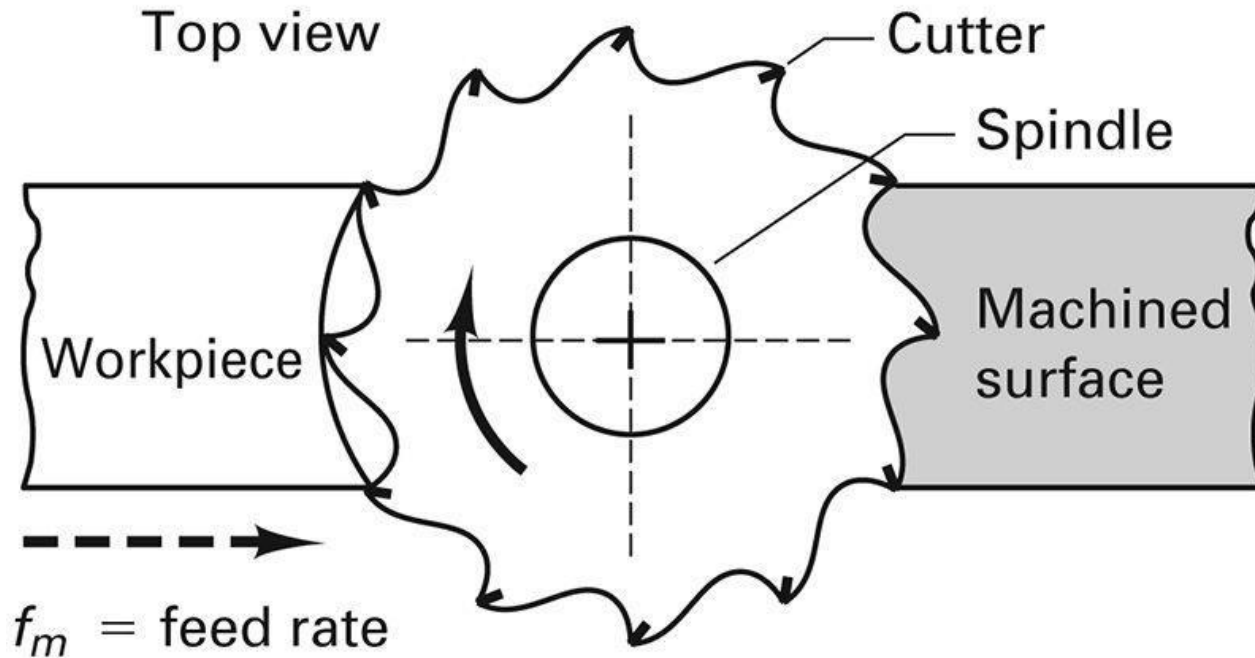


End Milling

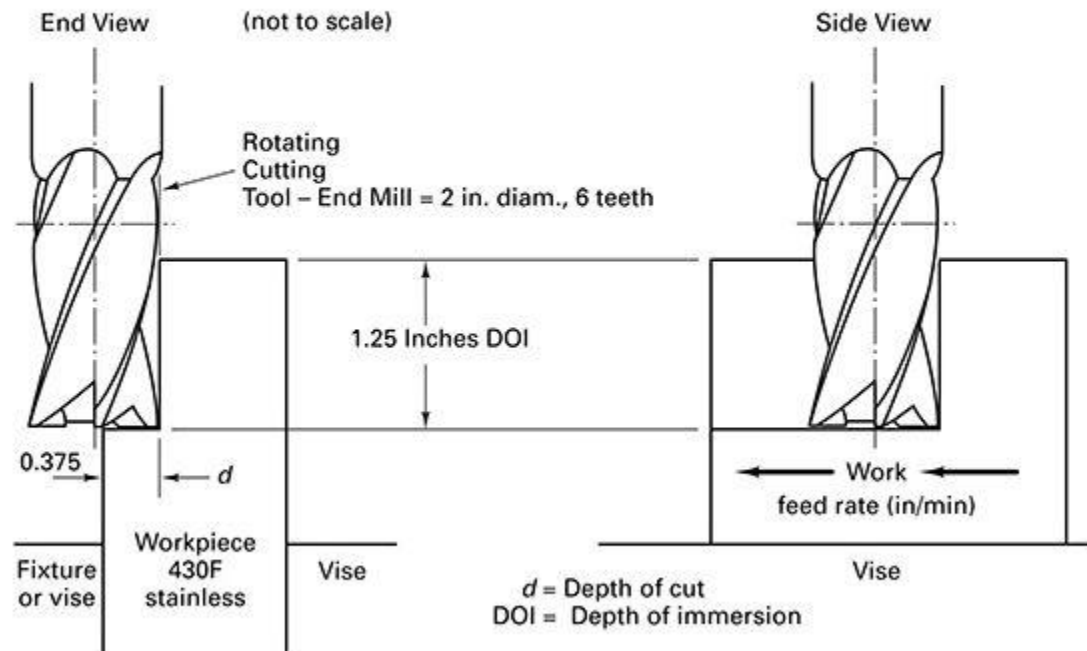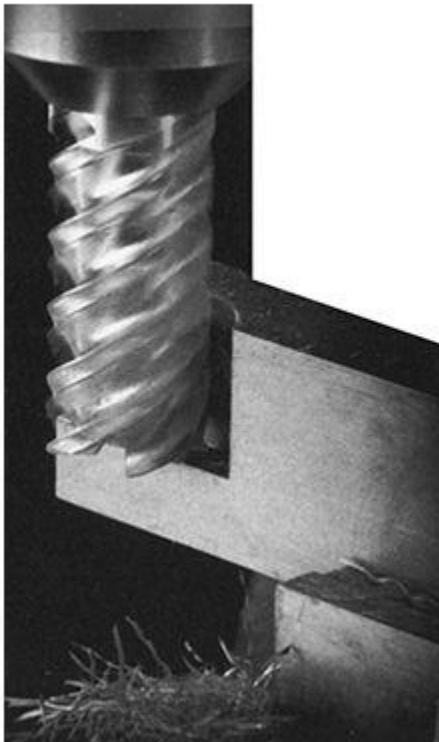



1st Milling Method – Up Milling Conventional Milling

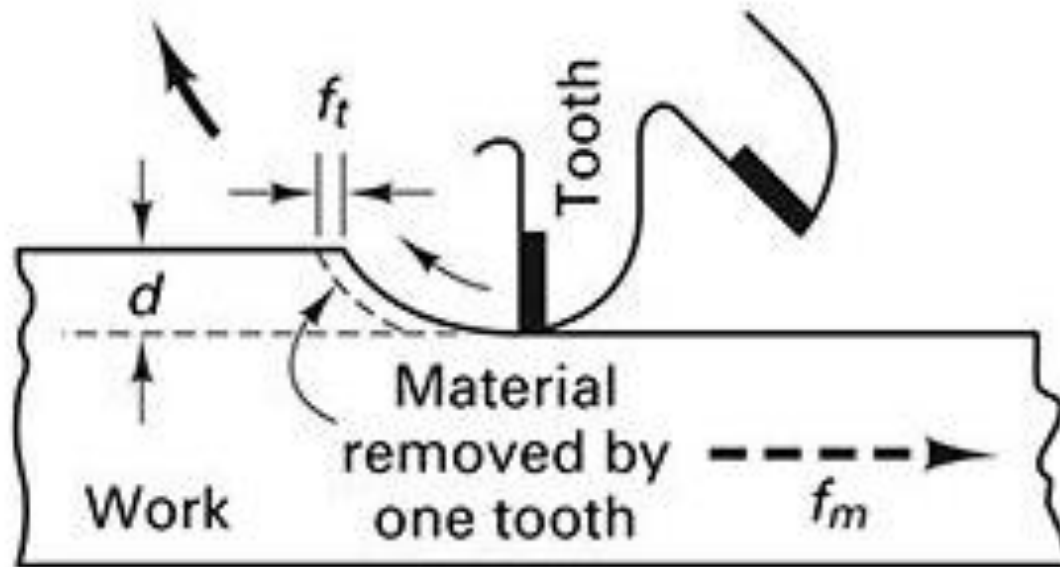




2nd Milling Method – Down Milling Climb Milling

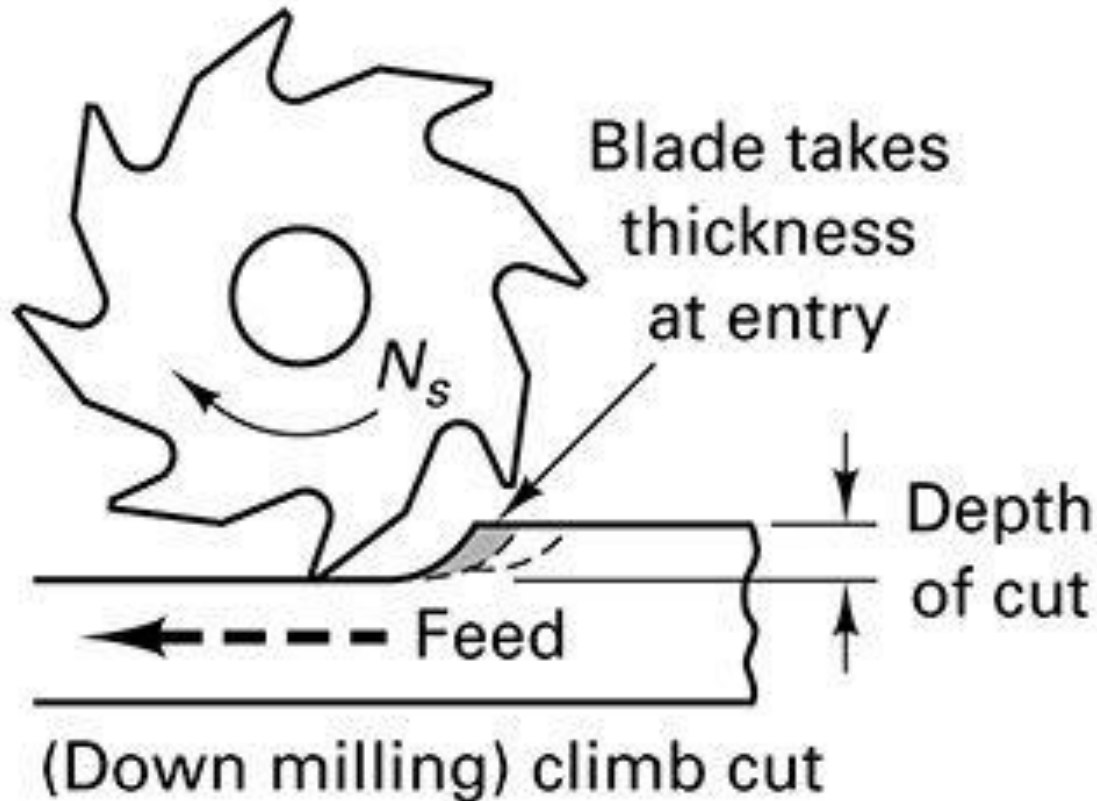


Arbor-type Cutters

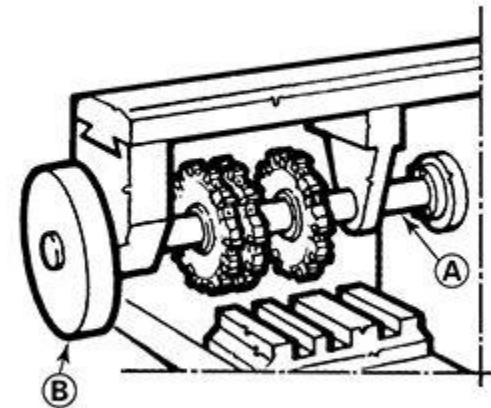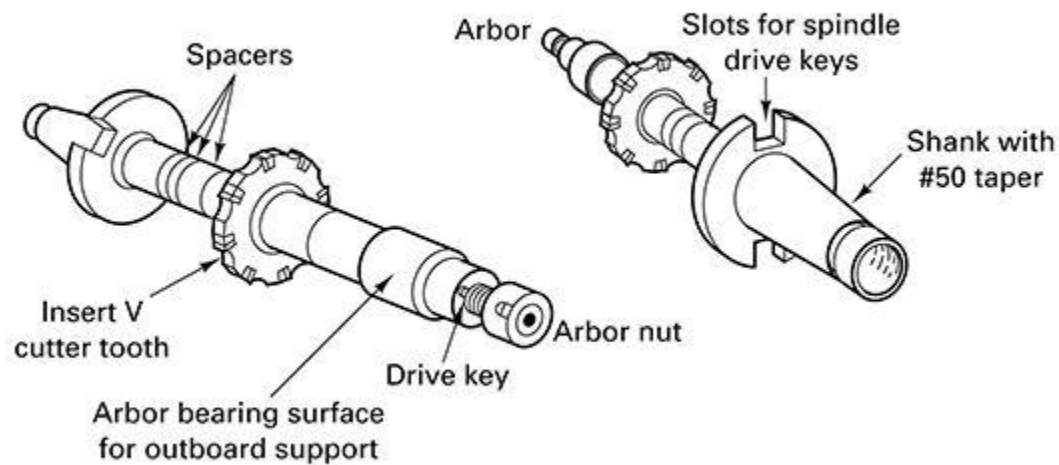


Arbor-Mounted Side Cutter

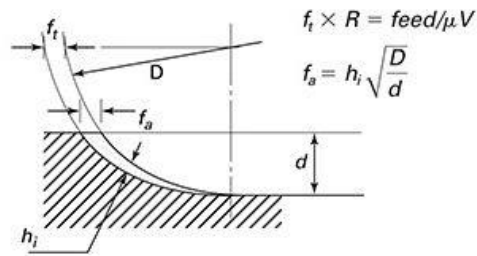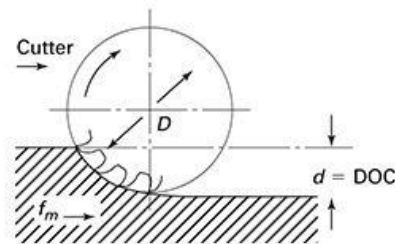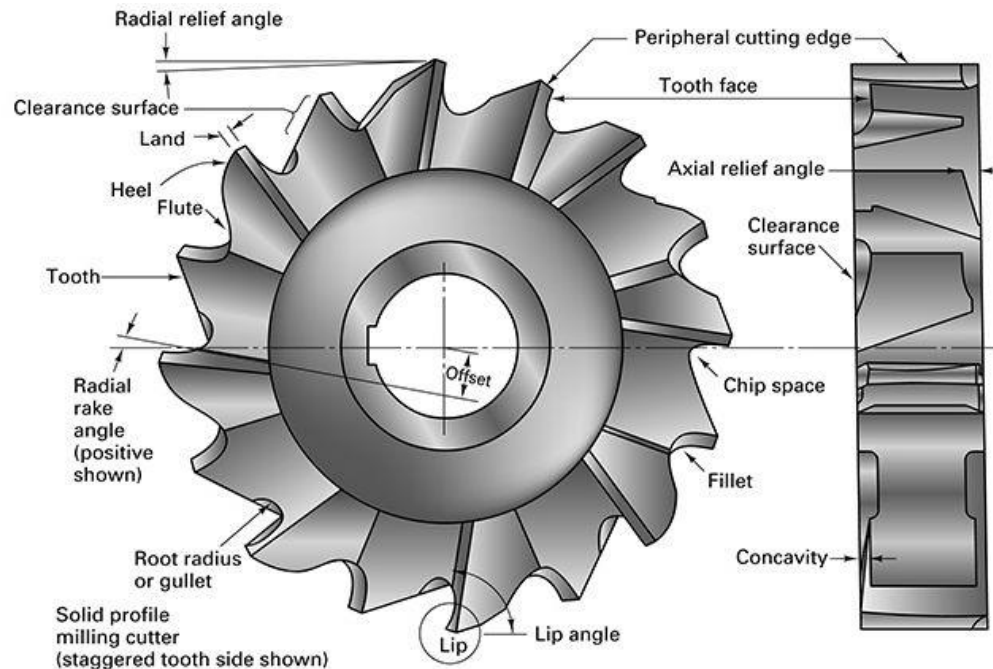




Shank-type Cutters

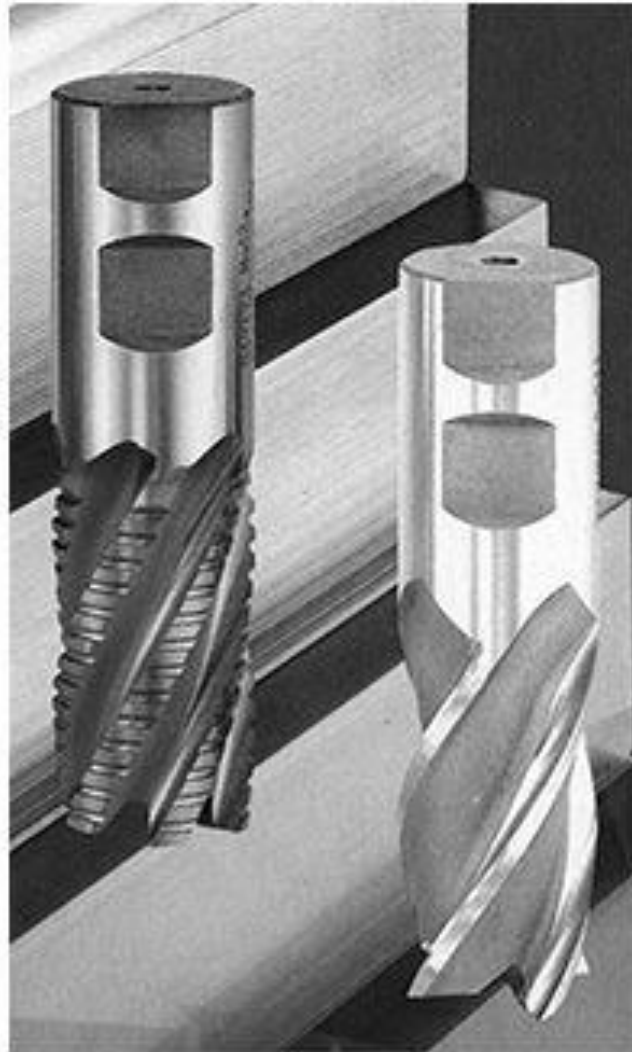



Plain Milling Cutters

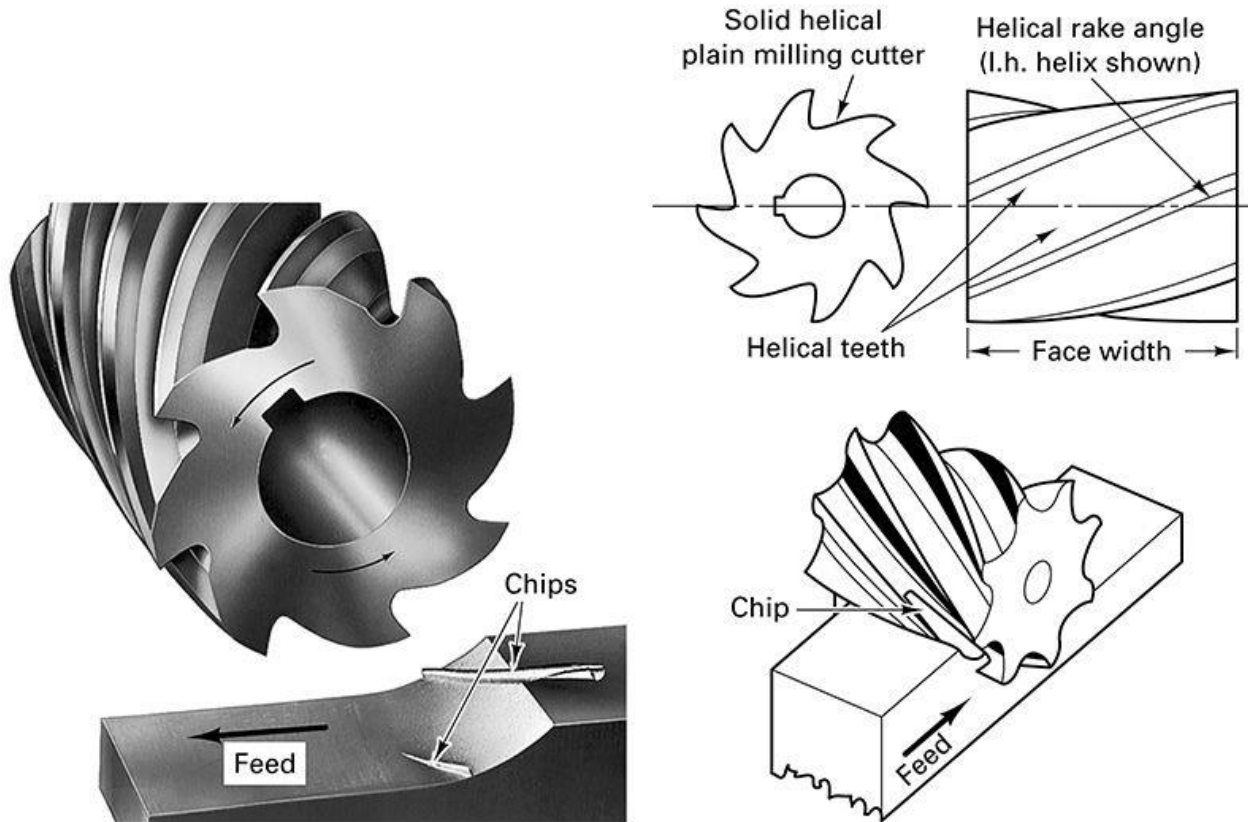

Side/Staggered Milling Cutters

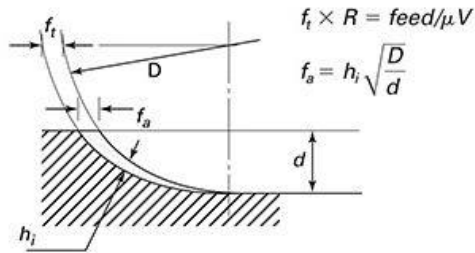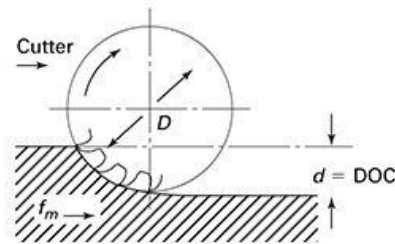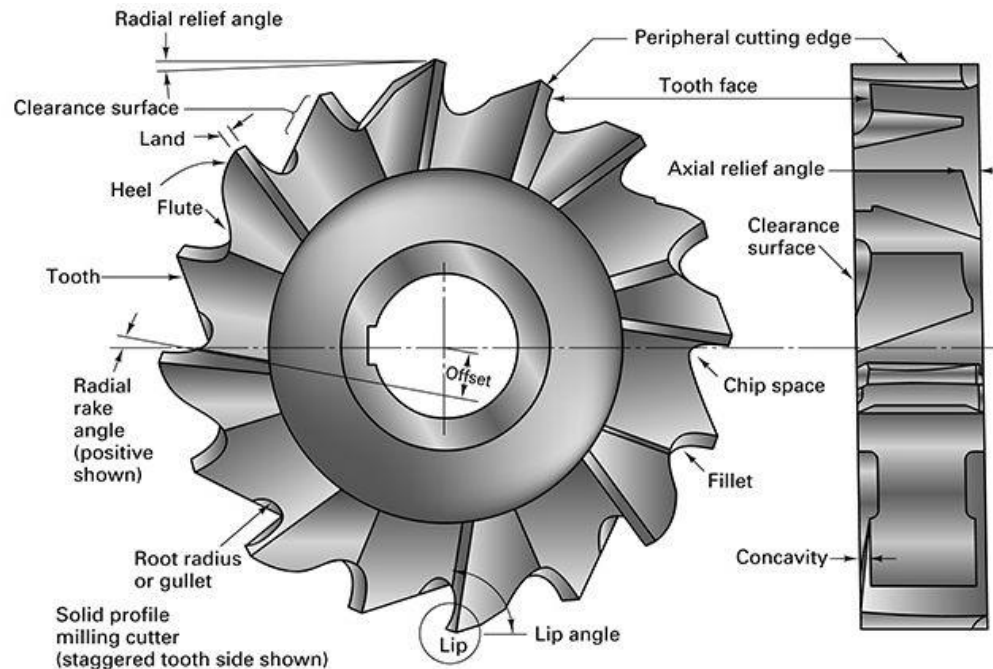


Interlocking Slotting Cutters

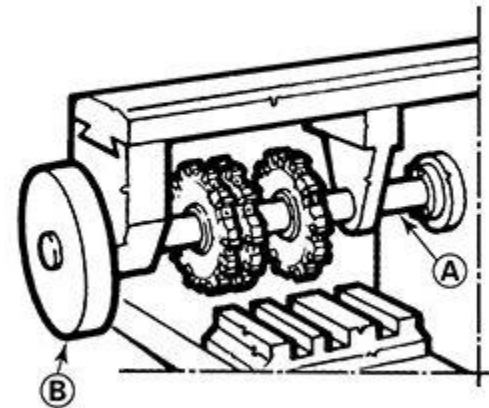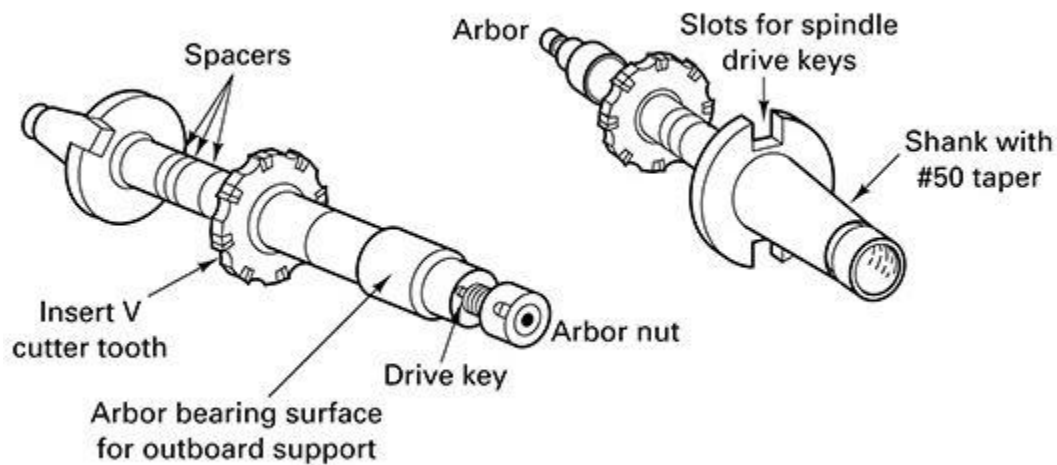

Angle Cutters



Form Cutters

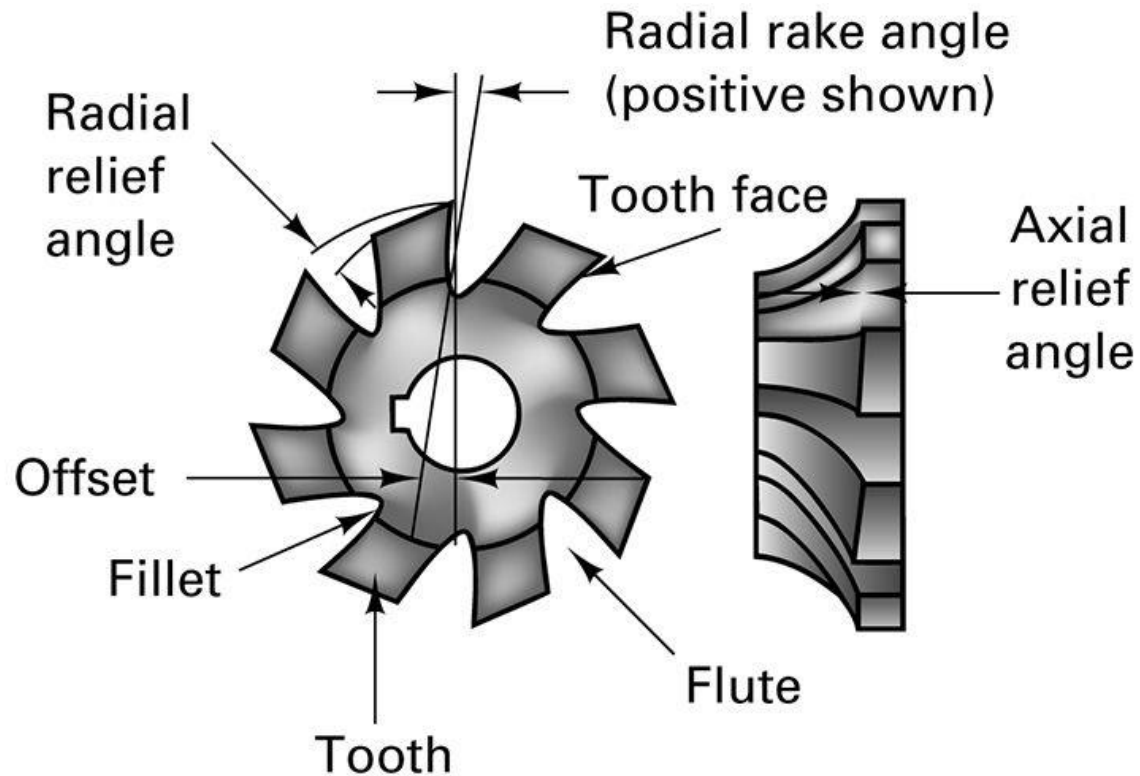

Solid form
relieved milling cutter

Insert-type Cutters

Face mill




End Mills



Shell End Mills





T-slot

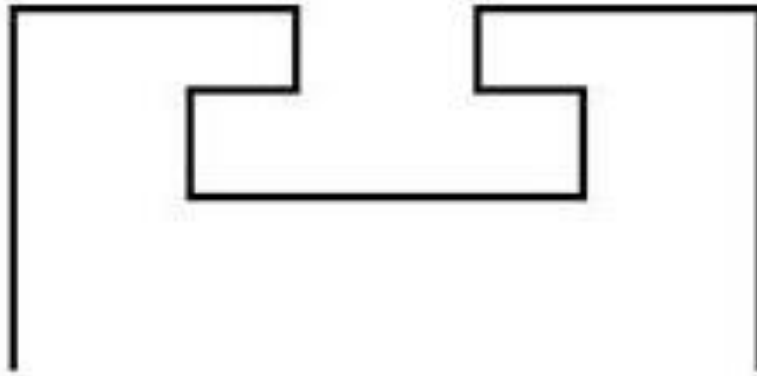


T-slot

Horizontal Milling Machine

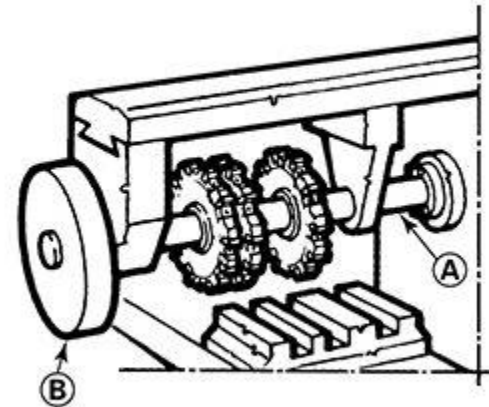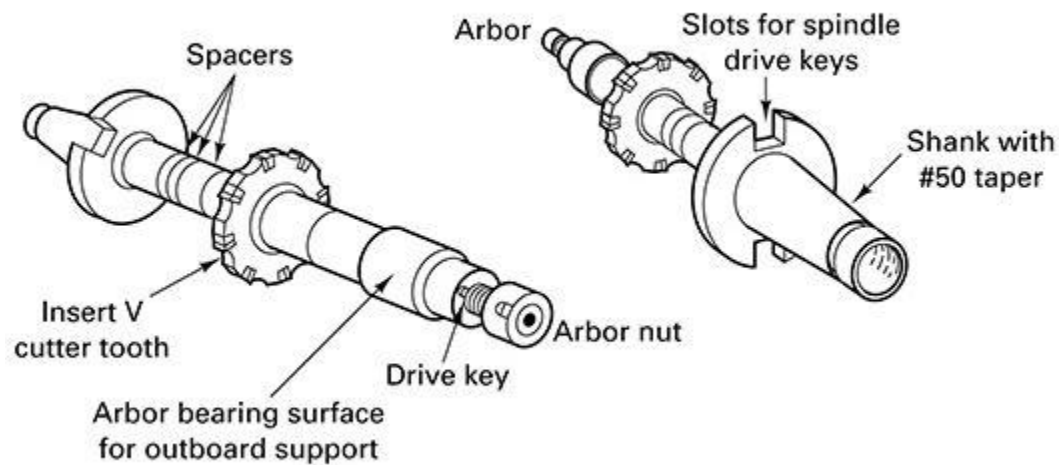


Vertical Milling Machine

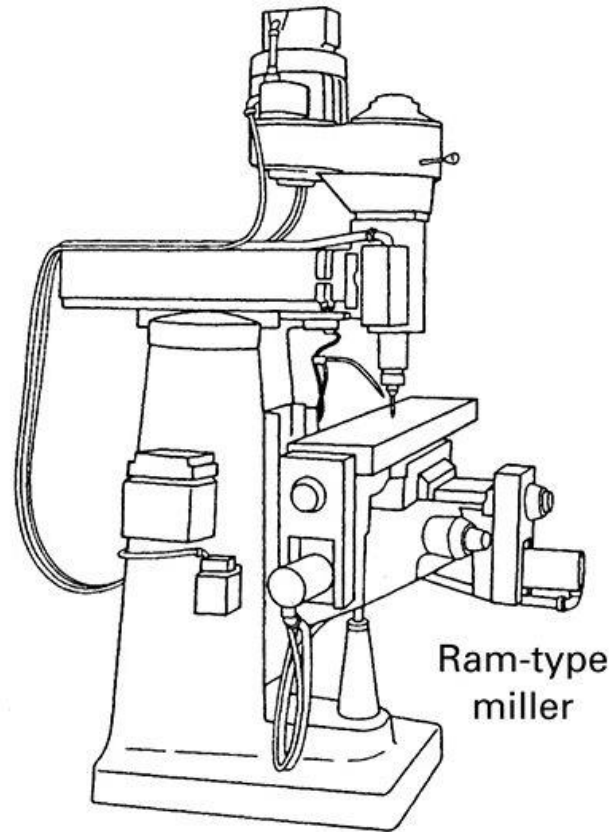


Vertical spindle ram-type

Plain Column and Knee

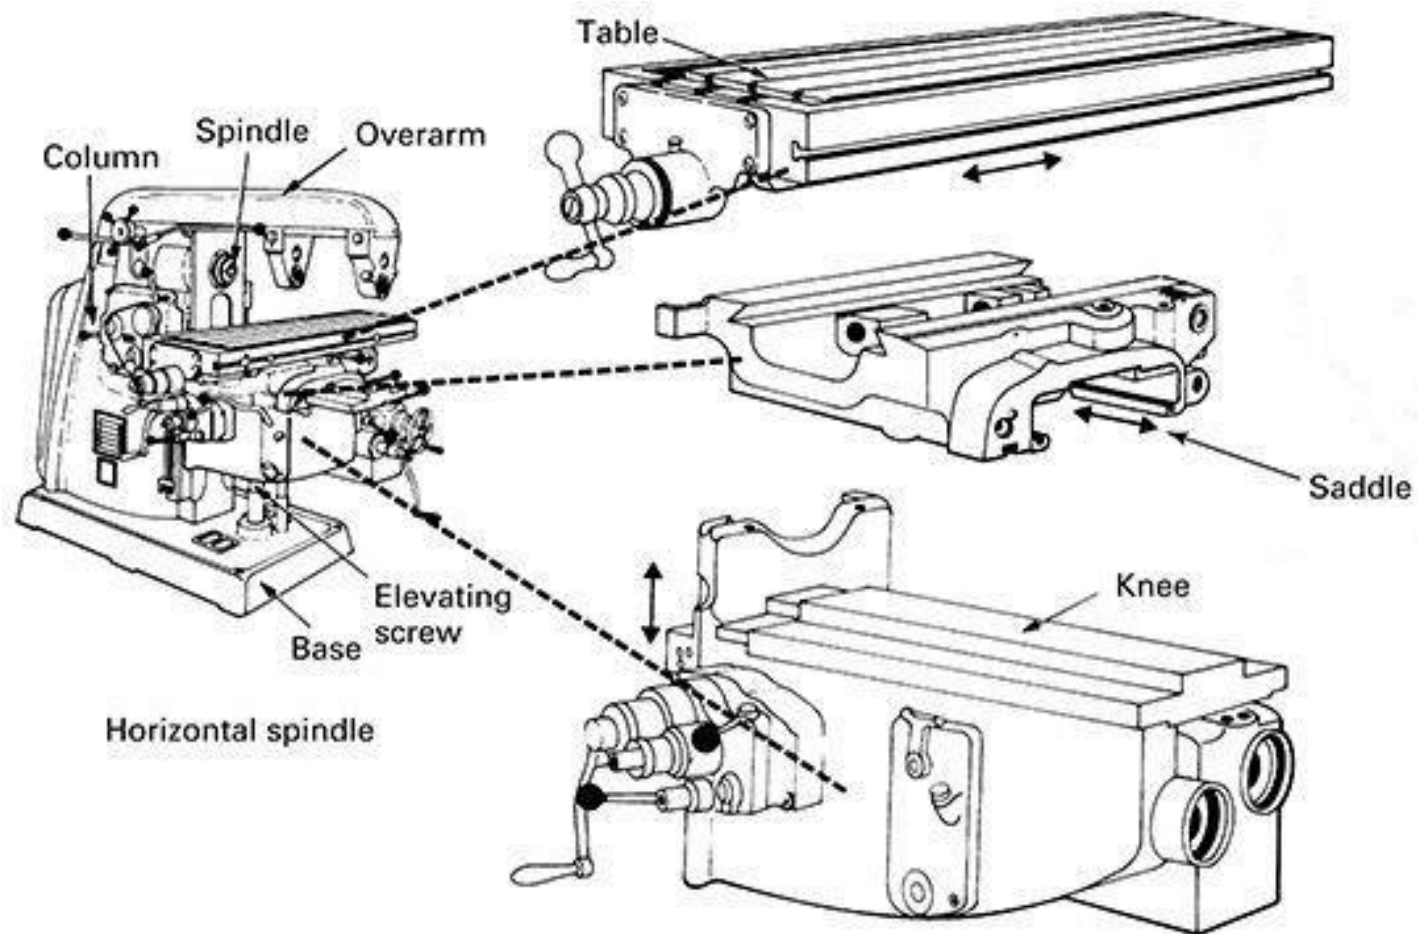


Bed-type Milling Machine

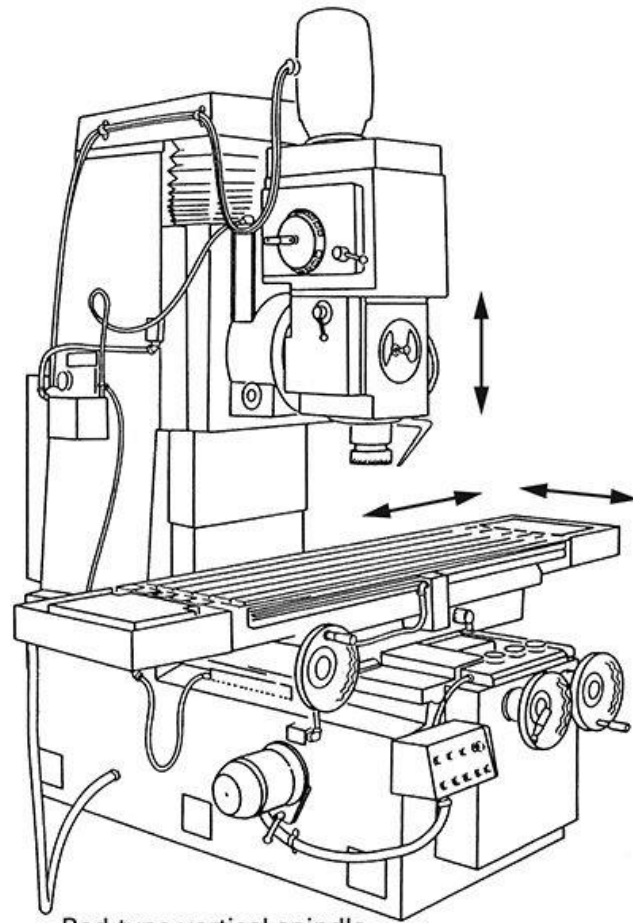


Bed-type vertical spindle

Planer-type Milling Machine

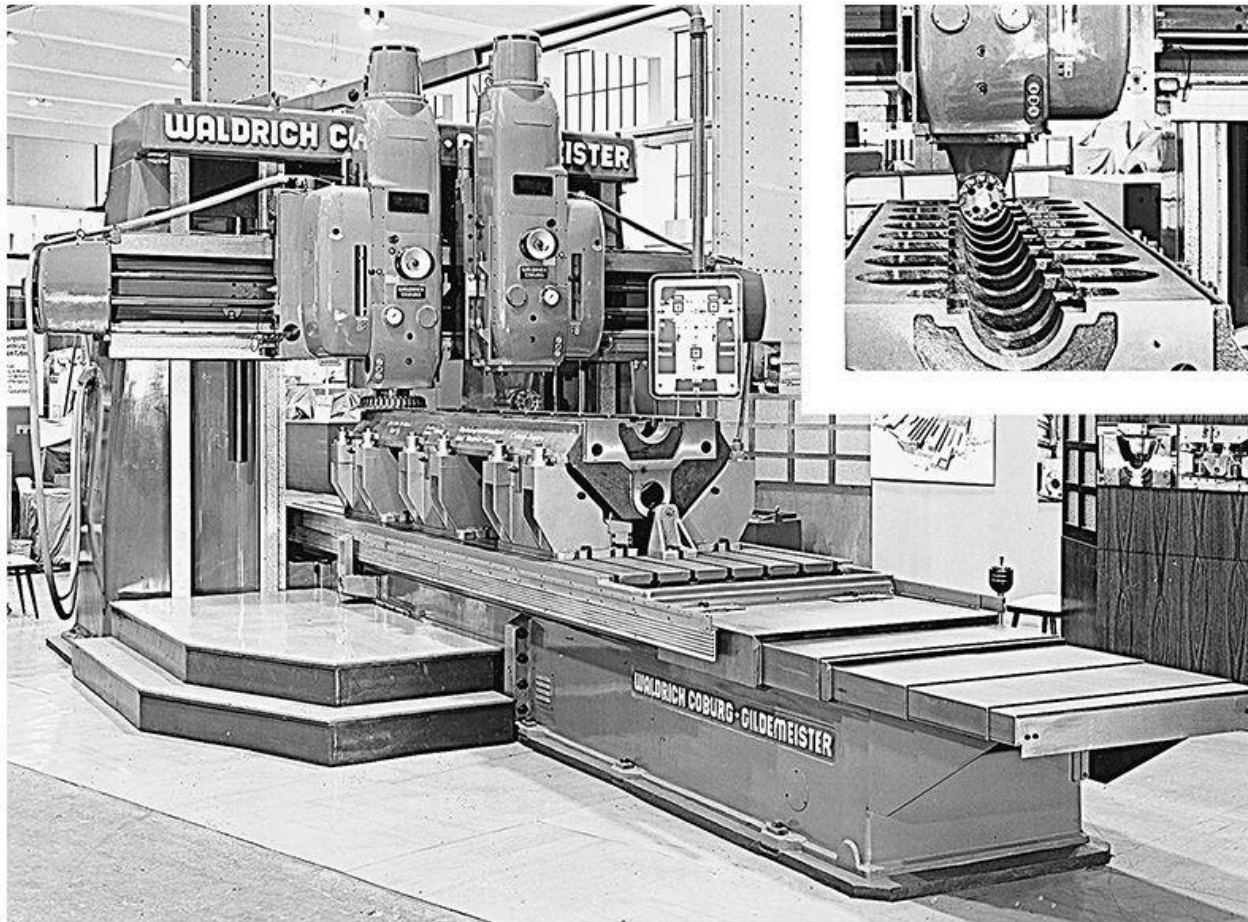

Universal Milling Attachment and Universal Dividing Head

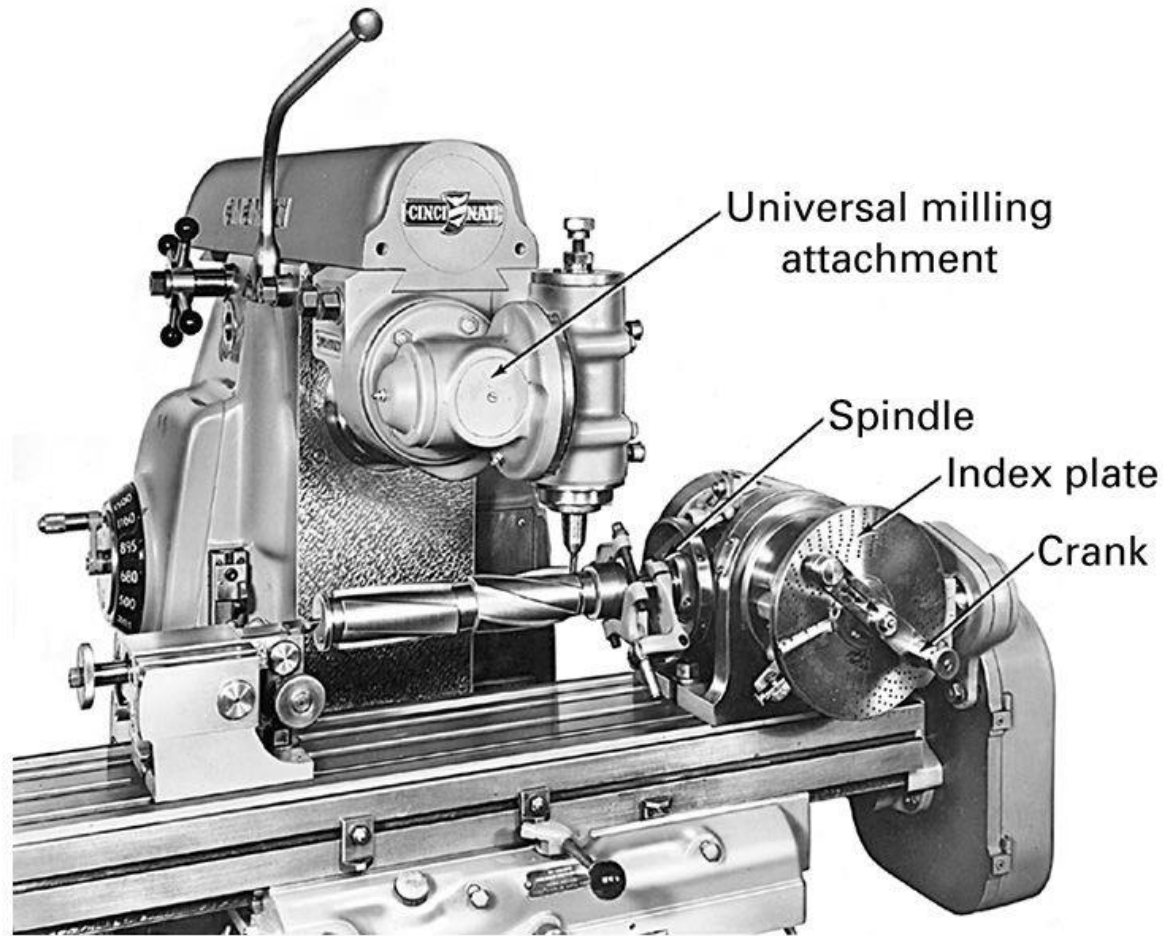

CNC Machining Centers

[Watch Video Here](#)