GMV-VQWM

- GREE
- VRF
- DC Inverter
- Outdoor unit

GMV6 HR outdoor unit type GMV-VQWM

- VRF heatpump DC Inverter outdoor unit

Product

- GREE GMV6 Heat Recovery System embodies the excellent features of GMV6 (DC Invertor technology, DC fan linkage control, precise control of capacity output, balancing control of refrigerant, original oil balancing technology with high pressure chamber, high-efficiency output control, low-temperature operation control technology, super heating technology, high adaptability for project, environmental refrigerant). Its energy efficiency is improved by 78% compared with conventional multi VRF

Application

- Outdoor Unit

Refrigerant

- R410A

Applicable indoor units

- Wall mounted type
- Floor-ceiling type
- Duct type
- Cassette type
- Console type
- Floor-standing type
- Fresh air processing type

Features

- All DC Inverter Technology. All DC invertor compressor is used in this system. In can directly intake gas to reduce loss of overheat and improve efficiency
- 82 Pa Wide Application Location
- Advanced Control Functions
- Beter Reliability
- Flexible Piping Design

Specifications										
Model			GMV-VQ224WM/C-X	GMV-VQ280WM/C-X	GMV-VQ335WM/C-X	GMV-VQ400WM/C-X	GMV-VQ450WM/C-X	GMV-VQ504WM/C-X	GMV-VQ560WM/C-X	GMV-VQ615WM/C-X
Capacity range		HP	8	10	12	14	16	18	20	22
Cooling capacity	Rated	kW	22.4	28	33.5	40	45	50.4	56	61.5
Heating capacity	Rated	kW	16.2	16.2	18.5	23.5	23.5	33	33	37
	Max.	kW	25	31.5	37.5	45	50	56.5	63	69
SEER	Ducted		7.40	6.58	6.29	6.62	6.34	6.24	6.15	5.95
	Cassette		7.07	5.95	6.98	6.50	6.11	5.57	5.38	5.19
SCOP	Ducted		5.18	5.18	5.44	4.87	4.87	4.89	4.80	4.80
	Cassette		4.47	4.47	4.55	4.18	4.18	4.05	3.95	3.95
Power supply		V/Ph/Hz	380-415V 3N~50/60Hz							
Max. circuit / Fuse current		A	23.0 / 25.0	23.5 / 25.0	24.1 / 25.0	32.5 / 40.0	33.5 / 40.0	47.0 / 50.0	48.0 / 50.0	49.0 / 50.0
Max. input power		kW	12.87	13.15	13.5	18.18	18.74	26.3	26.85	27.41
Maximum drive IDU NO.			13	16	19	23	26	29	33	36
Refrigerant charge volume		kg	8.0	8.5	9.6	11.1	11.6	12.8	12.8	13.3
Sound pressure level (Cooling)		dB(A)	60	61	63	63	63	63	63	64
Connecting pipe	Liquid	mm	Ø9.52	Ø9.52	Ø12.7	Ø12.7	Ø12.7	Ø15.9	Ø15.9	Ø15.9
	High pressure gas	mm	Ø15.9	Ø19.05	Ø19.05	Ø22.2	Ø22.2	Ø25.4	Ø25.4	Ø25.4
	Low pressure gas	mm	Ø19.05	Ø22.2	Ø25.4	Ø25.4	Ø28.6	Ø28.6	Ø28.6	Ø28.6
Dimension (W x D x H)		mm	930 x 775 x 1690	930 x 775 x 1690	930 x 775 x 1690	1340 x 775 x 1690	1340 x 775 x 1690	1340 x 775 x 1690	1340 x 775 x 1690	1340 x 775 x 1690
Weight		kg	240	243	256	320	325	385	385	385

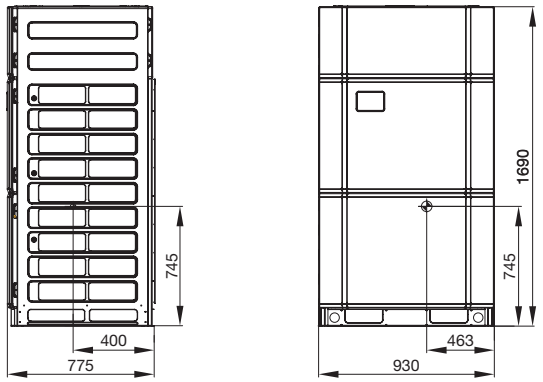

■ GMV-VQ224WM/C-X, GMV-VQ280WM/C-X , GMV-VQ335WM/C-X

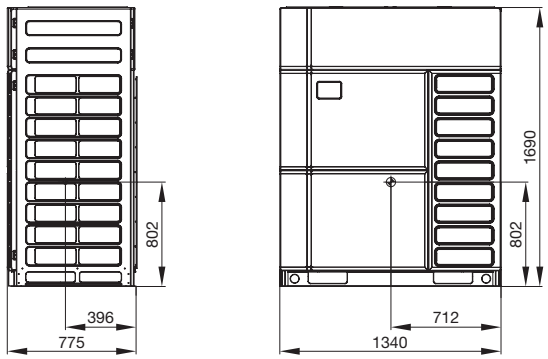

■ GMV-VQ400WM/C-X , GMV-VQ450WM/C-X

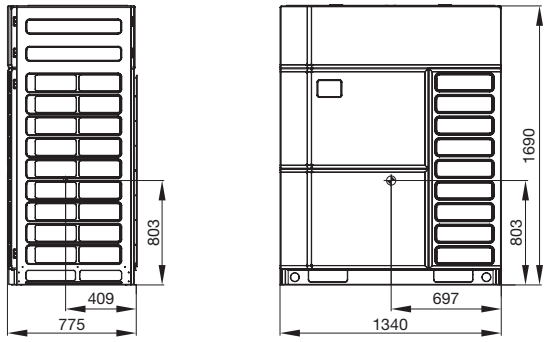

■ GMV-VQ504WM/C-X, GMV-VQ560WM/C-X , GMV-VQ615WM/C-X

Operating conditions					
	Nominal operating conditions				Operation range
	Outdoor conditions		Indoor conditions		Outdoor conditions
	DB Temperature (°C)	WB Temperature (°C)	DB Temperature (°C)	WB Temperature (°C)	DB Temperature (°C)
Cooling	35	-	27	19	-5 ~ +52
Heating	7	6	20	-	-20 ~ +24

Combination Table								
	GMV-VQ224WM/C-X	GMV-VQ280WM/C-X	GMV-VQ335WM/C-X	GMV-VQ400WM/C-X	GMV-VQ450WM/C-X	GMV-VQ504WM/C-X	GMV-VQ560WM/C-X	GMV-VQ615WM/C-X
GMV-VQ224WM/C-X	1	-	-	-	-	-	-	-
GMV-VQ280WM/C-X	-	1	-	-	-	-	-	-
GMV-VQ335WM/C-X	-	-	1	-	-	-	-	-
GMV-VQ400WM/C-X	-	-	-	1	-	-	-	-
GMV-VQ450WM/C-X	-	-	-	-	1	-	-	-
GMV-VQ504WM/C-X	-	-	-	-	-	1	-	-
GMV-VQ560WM/C-X	-	-	-	-	-	-	1	-
GMV-VQ615WM/C-X	-	-	-	-	-	-	-	1
GMV-VQ680WM/C-X	-	1	-	1	-	-	-	-
GMV-VQ730WM/C-X	-	1	-	-	1	-	-	-
GMV-VQ784WM/C-X	-	1	-	-	-	1	-	-
GMV-VQ840WM/C-X	-	1	-	-	-	-	1	-
GMV-VQ895WM/C-X	-	1	-	-	-	-	-	1
GMV-VQ950WM/C-X	-	-	1	-	-	-	-	1
GMV-VQ1015WM/C-X	-	-	-	1	-	-	-	1
GMV-VQ1065WM/C-X	-	-	-	-	1	-	-	1
GMV-VQ1119WM/C-X	-	-	-	-	-	1	-	1
GMV-VQ1175WM/C-X	-	-	-	-	-	-	1	1
GMV-VQ1230WM/C-X	-	-	-	-	-	-	-	1 + 1
GMV-VQ1290WM/C-X	-	1	-	-	1	-	1	-
GMV-VQ1345WM/C-X	-	1	-	-	1	-	-	1
GMV-VQ1400WM/C-X	-	-	1	-	1	-	-	1
GMV-VQ1455WM/C-X	-	1	-	-	-	-	1	1
GMV-VQ1510WM/C-X	-	1	-	-	-	-	-	1 + 1
GMV-VQ1565WM/C-X	-	-	1	-	-	-	-	1 + 1
GMV-VQ1630WM/C-X	-	-	-	1	-	-	-	1 + 1
GMV-VQ1680WM/C-X	-	-	-	-	1	-	-	1 + 1
GMV-VQ1734WM/C-X	-	-	-	-	-	1	-	1 + 1
GMV-VQ1790WM/C-X	-	-	-	-	-	-	1	1 + 1
GMV-VQ1845WM/C-X	-	-	-	-	-	-	-	1 + 1 + 1
GMV-VQ1905WM/C-X	-	1	-	-	1	-	1	1
GMV-VQ1959WM/C-X	-	1	-	-	-	1	1	1
GMV-VQ2015WM/C-X	-	1	-	-	-	-	1 + 1	1
GMV-VQ2070WM/C-X	-	1	-	-	-	-	1	1 + 1
GMV-VQ2125WM/C-X	-	1	-	-	-	-	-	1 + 1 + 1
GMV-VQ2180WM/C-X	-	-	1	-	-	-	-	1 + 1 + 1
GMV-VQ2245WM/C-X	-	-	-	1	-	-	-	1 + 1 + 1
GMV-VQ2295WM/C-X	-	-	-	-	1	-	-	1 + 1 + 1
GMV-VQ2349WM/C-X	-	-	-	-	-	1	-	1 + 1 + 1
GMV-VQ2405WM/C-X	-	-	-	-	-	-	1	1 + 1 + 1
GMV-VQ2460WM/C-X	-	-	-	-	-	-	-	1 + 1 + 1 + 1