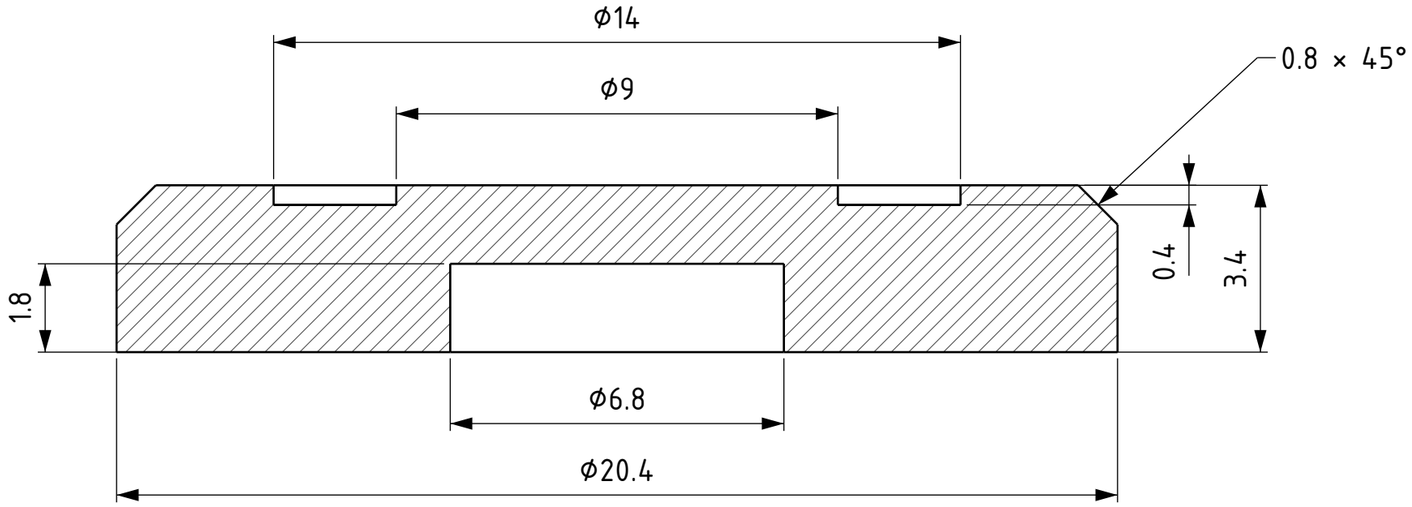

SECTION A–A SCALE 8:1

FEATURES (in order)

HUB CAP, SMALL (idler side, covers 1 centre screw):

1. Disc ϕ20.4, 3.4 thick (y 0 to 3.4); chamfer 0.8 × 45° on the outer edge of the outer face.
2. Recess ϕ6.8, 1.8 deep from the inner face (clears M3 button heads, 1.65 high).
3. Face groove: annulus ϕ9 to ϕ14, 0.4 deep from the outer face.

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- Press-fit or glue onto the clevis plate over the screw heads. Print outer face down.

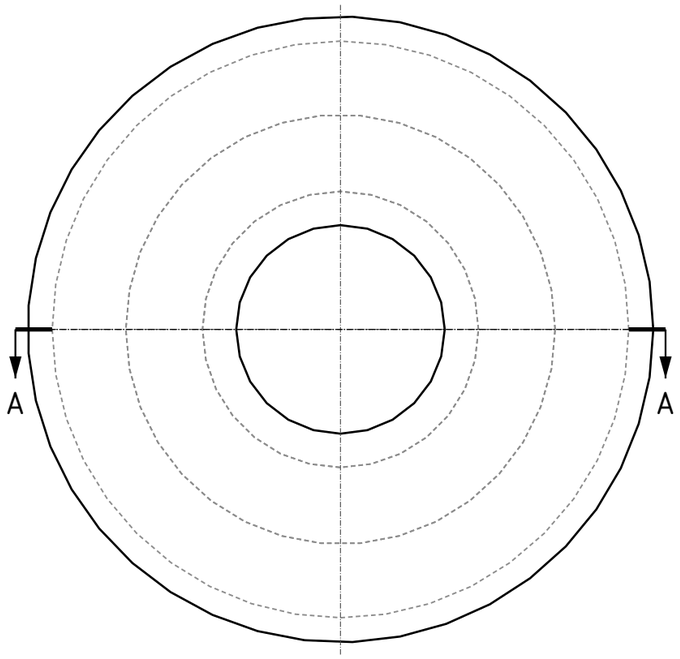

FRONT (INNER FACE)

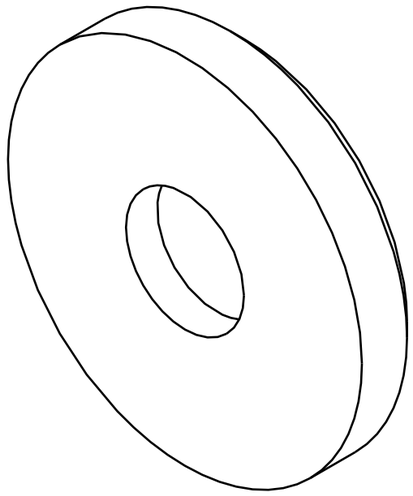

ISOMETRIC (NOT TO SCALE)

THIRD ANGLE PROJECTION

WORK SET A: base, shoulder, upper arm, hub caps	
PROJECT TALOS 5-axis arm	EST. MASS 1 g
PART Hub cap, small	SCALE 5:1
PART NO. TAL-109	UNITS / REV mm / A
QTY / ARM 3	DATE 2026-11-04
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 20 of 20