


NEC

NONLINEAR MODEL

NE68808

SCHEMATIC

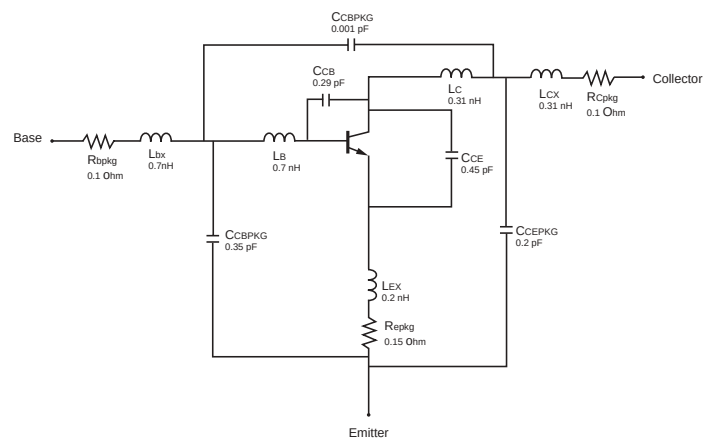

BJT NONLINEAR MODEL PARAMETERS (1)

Parameters	Q1	Parameters	Q1
IS	3.8e-16	MJC	0.48
BF	150.1	XCJC	0.45
NF	1	CJS	0
VAF	33.5	VJS	0.75
IKF	1.018	MJS	0
ISE	3.8e-15	FC	0.75
NE	1.502	TF	11e-12
BR	12.3	XTF	0
NR	1.019	VTF	0
VAR	3.5	ITF	0
IKR	0.06	PTF	50
ISC	3.5e-16	TR	1e-9
NC	1.62	EG	1.11
RE	0.4	XTB	0
RB	6	XTI	3
RBM	3.5	KF	1.5e-14
IRB	0.001	AF	1.22
RC	4.2		
CJE	0.8e-12		
VJE	0.71		
MJE	0.38		
CJC	0.55e-12		
VJC	0.65		

ADDITIONAL PARAMETERS

Parameters	68818
CCB	0.29e-12
CCE	0.45e-12
LB	0.7e-9
LC	0.31e-9
CCBPKG	0.001e-12
CCEPKG	0.2e-12
CBEPKG	0.35e-12
LBX	0.7e-9
LCX	0.31e-9
LEX	0.2e-9

MODEL RANGE
Frequency: 0.1 to 8.0 GHz
Bias: VCE = 1 V to 5 V, Ic = 1 mA to 20 mA
Date: 11/01

(1) Gummel-Poon Model