



Fakultät Informatik

# From CAD Software to Slicer

## Workflow Optimization using Print Hints in 3MF Files for 3D Printing

Bachelorarbeit im Studiengang Medieninformatik

vorgelegt von

Luise Hartdegen

Matrikelnummer 3642168

Erstgutachter: Prof. Dr. Ulrich von Zadow

Zweitgutachter: Prof. Dr. Timo Götzelmann

© 2025

Dieses Werk einschließlich seiner Teile ist **urheberrechtlich geschützt**. Jede Verwertung außerhalb der engen Grenzen des Urheberrechtsgesetzes ist ohne Zustimmung des Autors unzulässig und strafbar. Das gilt insbesondere für Vervielfältigungen, Übersetzungen, Mikroverfilmungen sowie die Einspeicherung und Verarbeitung in elektronischen Systemen.

**Abstract**

**Kurzdarstellung**

# Contents

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1. Introduction</b>                                     | <b>1</b>  |
| <b>2. Problem</b>                                          | <b>3</b>  |
| 2.1. Repetitive Steps in the Iterative Workflow            | 3         |
| 2.2. Negative Effects on Professionals and (casual) Makers | 3         |
| 2.3. what does it solve                                    | 3         |
| <b>3. Method</b>                                           | <b>5</b>  |
| 3.1. some HCI foundational work if necessary               | 5         |
| 3.2. Fusion Add-In                                         | 5         |
| 3.2.1. Script vs. Add-in                                   | 5         |
| 3.2.2. Python vs. C++                                      | 6         |
| 3.3. 3mf changes                                           | 6         |
| 3.4. slicer changes                                        | 6         |
| <b>4. Outlook</b>                                          | <b>7</b>  |
| <b>5. Summary</b>                                          | <b>8</b>  |
| <b>A. Supplemental Information</b>                         | <b>9</b>  |
| <b>List of Figures</b>                                     | <b>10</b> |
| <b>List of Tables</b>                                      | <b>11</b> |
| <b>List of Listings</b>                                    | <b>12</b> |
| <b>Bibliography</b>                                        | <b>13</b> |

# Chapter 1.

## Introduction

It is one of the clearest paradoxes of modern work that computer-based systems designed to reduce task complexity and cognitive workload actually often impose even greater demands and stresses on the very individuals they are supposed to be helping.[?, p. 222]

When designing a model for 3D printing, the process frequently follows a certain set of iterative steps. After the ideation phase, the design engineer first creates the model using CAD software, imports the file (e.g. STL, 3MF) to a slicer software, sets the necessary parameters and finally starts printing. They evaluate the result for design flaws or areas of improvement, leading to model revisions and thereby reinitiating the workflow as pictured in figure 2.1. Throughout the iterations, some printing parameters will be tweaked but overall you want to keep them consistent to have a reliable comparison. Despite automation and optimization having been a prevalent topic in the software developer community for years, setting the parameters is generally a manual step. Hence, the design engineer has to remember their settings or save them some other way, possibly by writing them down meticulously or taking screenshots.

With access to printers in public institutions becoming easier and the growing popularity of 3D printing not only within the *maker* community but in casual users as well, HCI needs to focus on streamlining error-prone workflows like the one described above[1]. “[C]urrent tools that focus on supporting only one aspect of the workflow (e.g. , only modelling or only printing) may be less useful for casual makers and there is opportunity in HCI research to innovate on design tools that take into account the interdependencies within the 3D printing workflow”[1, p. 385]

This thesis focuses on the communication between CAD software and slicer, with a particular focus on proving the feasibility of ‘print hints’. The goal is to streamline the iterative design workflow by reducing the need to repeatedly configure the same printing parameters in each iteration, therefore lowering cognitive workload for design engineers. The approach as currently planned contains two core components: firstly, an improved export function within the CAD software *Autodesk Fusion*, e.g. to mark certain objects

as modifiers; and second, automatic handling of materials and these print hints within the open source slicer software called *OrcaSlicer*.

---

“*makers*, a community of enthusiasts who focus on fabrication, invention and experience sharing, and who collaborate and learn in environments known as *makerspaces*”[1, p. 384]

“thousands of public institutions, such as schools, libraries, and universities are now setting up print centers or creative hubs for end users to make use of digital fabrication technologies”[1, p. 384]

“makerspaces that are often run by enthusiasts [...] attract engineers, entrepreneurs, inventors, hackers, craftsmen, and artists”[1, p. 384]

“casual makers serve as a proxy for what it will be like for the general public to use 3D printing”[1, p. 384]

“if HCI is going to be at the forefront of inventing new fabrication design tools and interfaces[...], we need to look beyond enthusiasts and understand the challenges and opportunities that exist in facilitating the interactions of casual makers with fabrication technology”[1, p. 384]

“current tools that focus on supporting only one aspect of the workflow (*e.g.* , only modelling or only printing) may be less useful for casual makers and there is opportunity in HCI research to innovate on design tools that take into account the interdependencies within the 3D printing workflow”[1, p. 385]

“while lowering the usability barriers of fabrication tools is important, it is perhaps even more important to weave-in expertise on best practices and troubleshooting tips within the walk-up-and-use tools used by casual makers to reduce their dependency on operators”[1, p. 385]

“opportunities that exist in building the next generation of inter-connected fabrication tools with features for supporting expertise sharing”[1, p. 385]

“enthusiasts and professional users—that is, they were trained or technically literate in fabrication”[1, p. 386]

## Chapter 2.

### Problem

extensive explanations of the problem at hand and why this needs to be improved

#### 2.1. Repetitive Steps in the Iterative Workflow

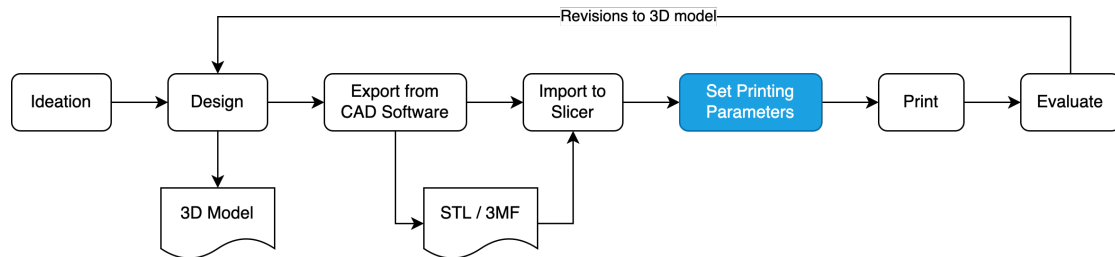


Figure 2.1.: Iterative workflow in 3D printing highlighting the step to be optimized

#### 2.2. Negative Effects on Professionals and (casual) Makers

“If the user’s print failed or did not match their design intent, they would have to adjust either their model or print settings to correct the issue, often with the operator’s assistance”[1, p. 389]

#### 2.3. what does it solve

- what does the optimized workflow look like?
- how it might make sharing files easier for beginners when supports and modifiers are included → lowering the access barrier for casuals, beginners and in educational contexts

- how it reduces cognitive workload → minimizing mistakes and waste due to prints going wrong

#### Definition of supports

“With FDM printers, geometric constraints relating to overhangs and base size can be partially addressed using automatically generated scaffolding known as supports and rafts”[1, p. 391]

“many print centers enforced final check-overs by the operators on users’ designs and print settings before printing to reduce failed prints”[1, p. 392]

## Chapter 3.

### Method

how I solve this

#### 3.1. some HCI foundational work if necessary

#### 3.2. Fusion Add-In

- what is CAD software
- a lil about their API: add-in vs. script, Python vs. C++
- why I chose to realise it as a Python add-in
- possibly different approaches if more than one way to solve it came up

As mentioned before, the software supports developers to create additional functionalities by providing an extensive API and the option to create either an add-in or a script directly from within Fusion's UI. Using this, Fusion sets up the project structure as well as some example code to make it easier to get started especially for beginners. Fusion runs natively on Python but offers to create the add-in or script either in Python or in C++.

##### 3.2.1. Script vs. Add-in

[2]

- **Run on Startup** – This setting is add-in-specific and indicates if the add-in should be run automatically when Fusion is started. Most add-ins will want to take advantage of this capability so the commands they define will be available to the user as soon as Fusion starts.

- The user executes a script through the “Scripts and Add-Ins” command, and the execution stops immediately after the run function is complete. A script runs, and then it is done.
- An add-in is typically automatically loaded by Fusion when Fusion starts up. An add-in also usually creates one or more custom commands and adds them to the user interface during startup. The add-in continues to run throughout the Fusion session, so it can react whenever the user executes any of its commands. The add-in remains running until Fusion is shut down or the user explicitly stops it through the “Scripts and Add-Ins” dialog. When it stops, it cleans up whatever user interface customization it created in its stop function.

### 3.2.2. Python vs. C++

## 3.3. 3mf changes

- what is 3mf?
- how do i need to change it and do the changes conform with the consortium’s specifications

## 3.4. slicer changes

- what is a slicer

“Processing the 3D model occurred in specialized software known as a slicer (as it slices the model into layers for the printer), which allowed users to select print settings, such as layer height and print speed”[1, p. 389].
- how does it process 3mf per default?
- different possible approaches to solve the problem at hand and why did I do it the chosen way?

## Chapter 4.

### Outlook

- communication with OrcaSlicer's owner softfever?
- option of code being pulled into other slicers
- what is left to do?

## Chapter 5.

### Summary

**Appendix A.**

**Supplemental Information**

## List of Figures

|                                                                                      |   |
|--------------------------------------------------------------------------------------|---|
| 2.1. Iterative workflow in 3D printing highlighting the step to be optimized . . . . | 3 |
|--------------------------------------------------------------------------------------|---|

## List of Tables

## List of Listings

## Bibliography

- [1] N. Hudson, C. Alcock, and P. K. Chilana, “Understanding Newcomers to 3D Printing: Motivations, Workflows, and Barriers of Casual Makers,” in *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems*, ser. CHI '16. New York, NY, USA: Association for Computing Machinery, 2016, pp. 384–396. [Online]. Available: <https://dl.acm.org/doi/10.1145/2858036.2858266>
- [2] S. F. Autodesk Inc., CA, “Fusion Help | Creating a Script or Add-In | Autodesk,” 2025. [Online]. Available: <https://help.autodesk.com/view/fusion360/ENU/?guid=GUID-9701BBA7-EC0E-4016-A9C8-964AA4838954>