

A

B

C

D

E


ASSEMBLY NOTES:

Assembly shall conform to IPC-A-610 Class 2.
Assembly shall conform with RoHS Directive 2011/65/EU.
Components shall be placed according to the associated CPL and BOM documents.
Lead-free SAC305 solder shall be used.
Reflow profile shall comply with J-STD-20C Lead-Free Reflow Profile.
BGA components shall be 100% checked with x-ray for solder bridges after reflow.
Finished assemblies shall be removed from panel prior to delivery.

Notes:

- 1 Camera module will be supplied and installed by customer. J2 is SMT connector only.
- 2
- 3

[Variant:]: View from Bottom side (Scale 4:1)

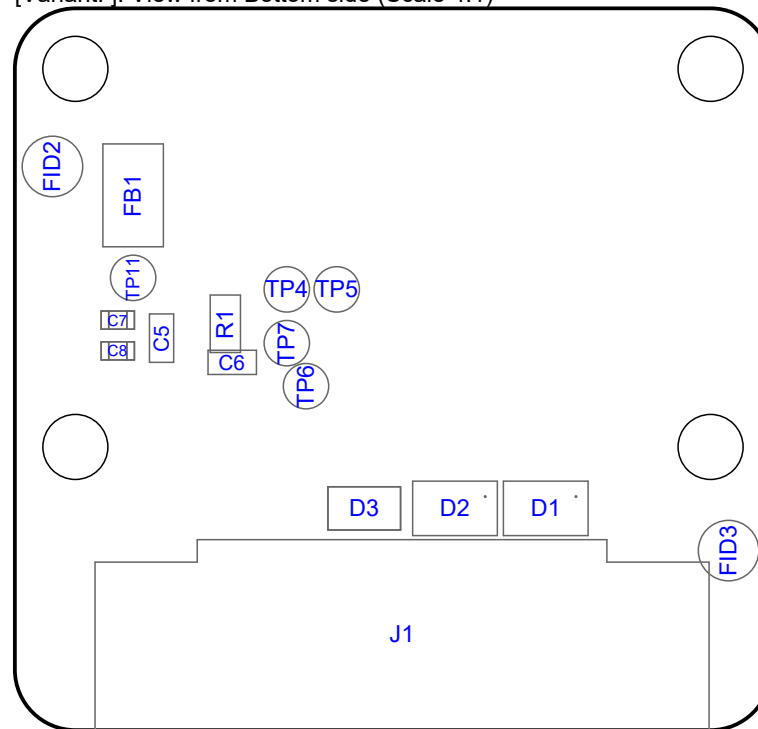

Title: **EL0258**

Number: D0000999 Revision: R0M0
E1

Date: 05/06/2023 Sheet: 1 of 2

Drawn by: Eason Lin

LUXonjs

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

A

B

C

D

E

A


B

C

D

E

View from Top side (Scale 4:1)

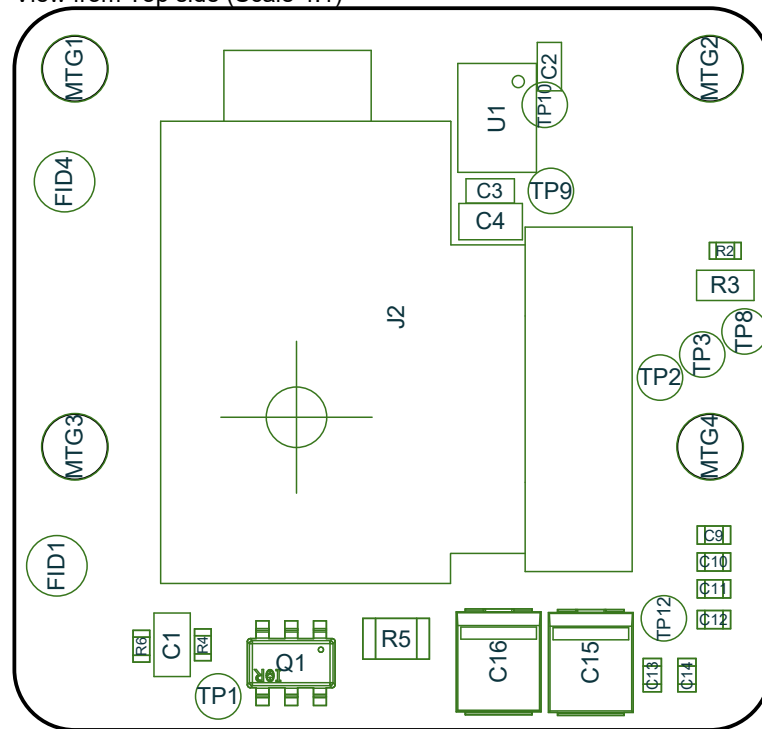

Title: **EL0258**

Number: D0000999 Revision: R0M0
E1

Date: 05/06/2023 Sheet: 2 of 2

Drawn by: Eason Lin

LUXonjs

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.


A

B

C

D

E

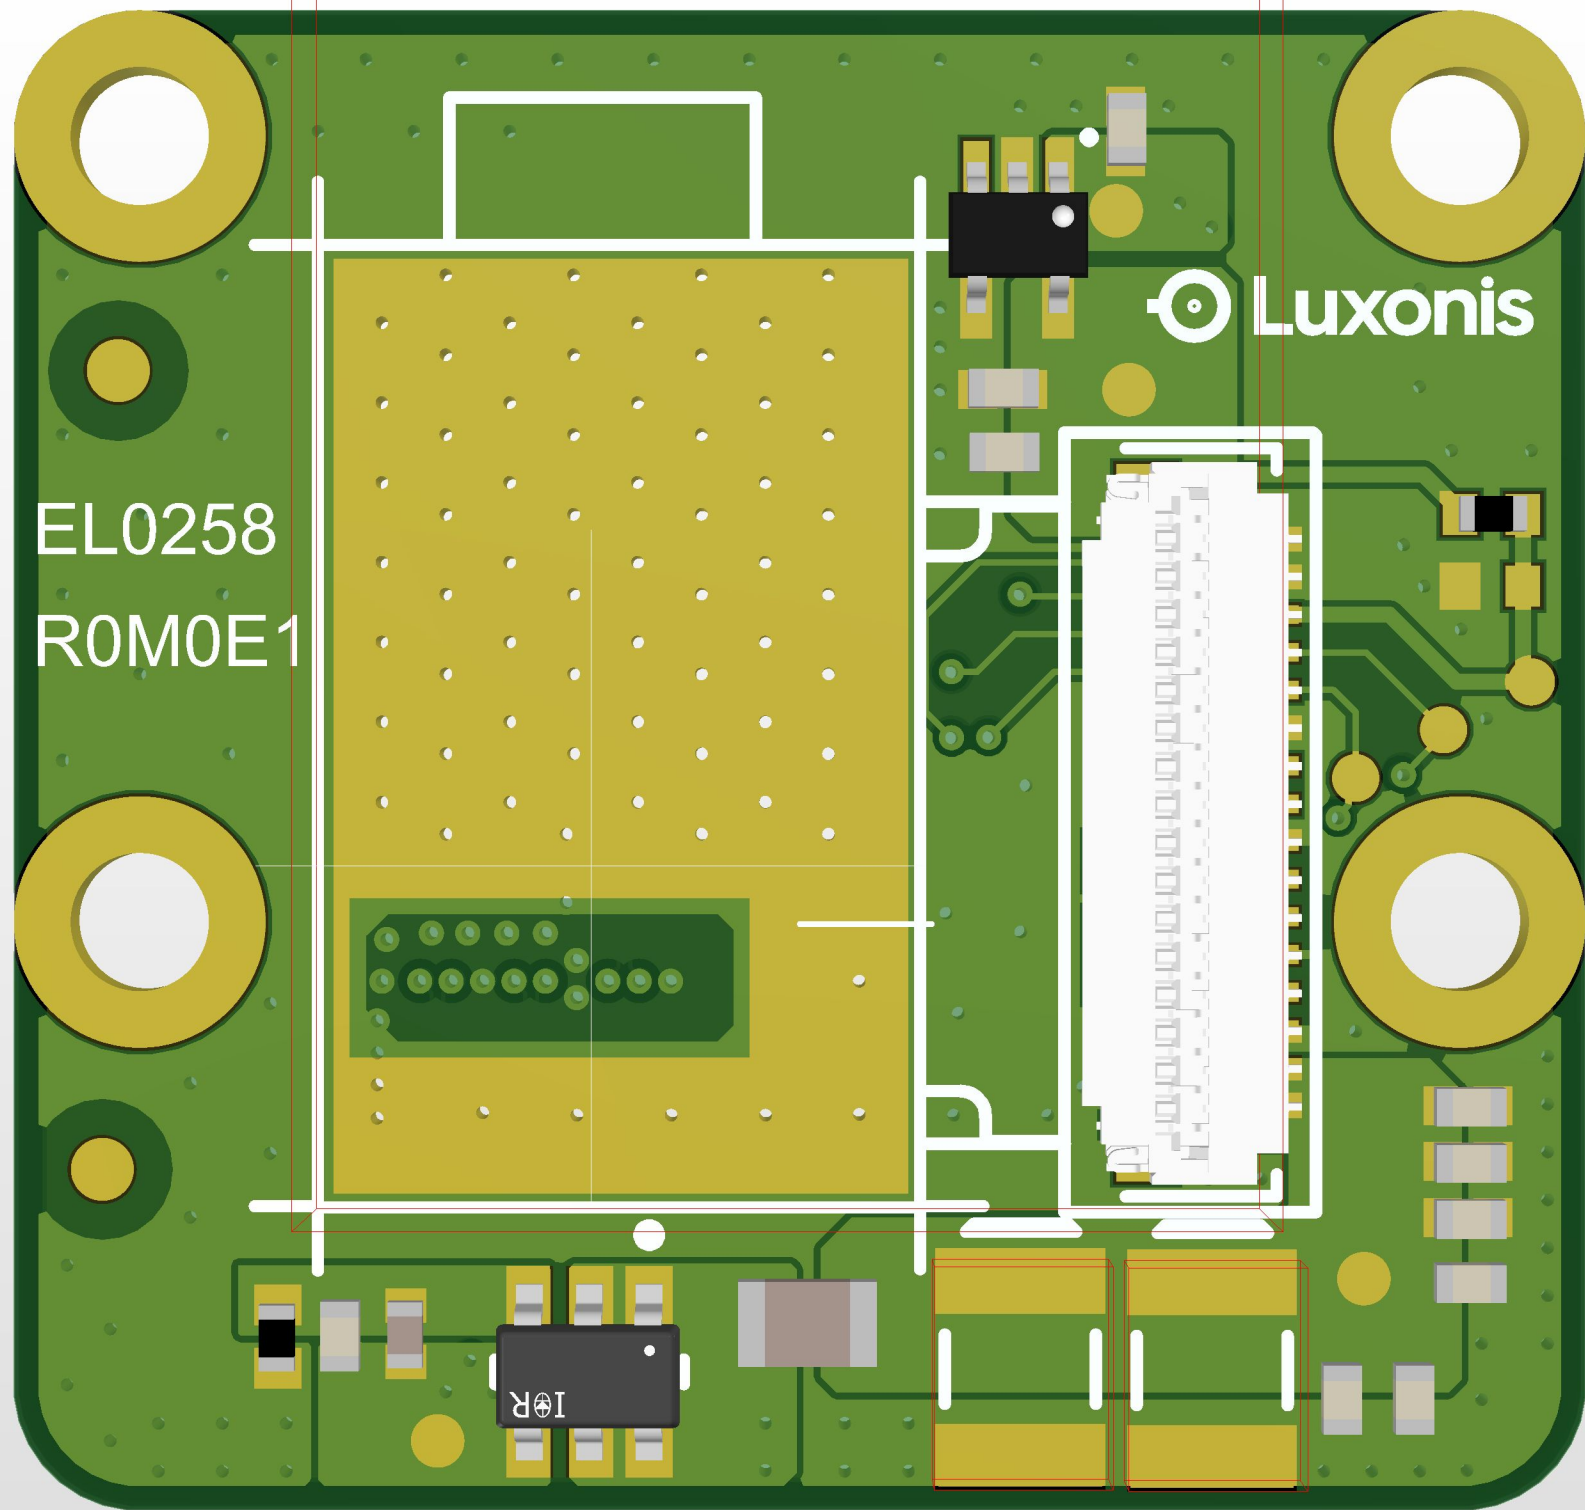

Luxonis

EL0258
ROM0E1

RoHS



26

1

