



MINING DEALER BEST PRACTICE

Tagging Recorded Backlogs

**Maintenance and
Repair**

Application

**Component Life
Management**

**Component
Renewal (CRC)**

**MARC
Management**

Tagging Recorded Backlogs	0
1.0 Introduction	1
2.0 Best Practice Description	1
3.0 Implementation Steps	2
4.0 Benefits	3
5.0 Resources Required	3
6.0 Supporting Attachments / References	3
7.0 Related Best Practices	3
8.0 Acknowledgements	3

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices.” Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

**January 2016
1508-1.06-1384**

1.0 Introduction

Backlogs are normally recorded on the electronic work order management system which needs to be constantly reviewed in order to track outstanding faults. Backlogs (faults identified for further work) on mining equipment are identified during various inspections as part of a structured preventive maintenance process. These Backlogs in most cases are recorded on paper before being entered into the electronic work order management system where it is scheduled, parts ordered and labor is allocated for the job.

Often different people see the fault, complete the paperwork and / or look up the work order management system. This can create double-ups or wasted time looking up work order system for faults on each machine. If the Technician does not have access to the work order management system, then time is wasted by completing Backlog paperwork for Administrators and Supervisors to review and enter.

2.0 Best Practice Description

By physically tagging Backlog faults on machines, Technicians can see what has been previously recorded. This Best Practice outlines the process of physically tagging faults on machines so they can be easily identified and others know the fault has been recorded as Backlog and scheduled for future repairs. This does not replace the paper or electronic recording and work order management system. It's a way to physically identify recorded faults without the need to check the paper or electronic system.

Tags can be any form of identification but one that has proven to perform well is the use of colored cable ties (zip ties). In the example below we see bright yellow cable ties that are un-cut. These are easily identifiable and it's obvious in the example below that this leaking brake line has been identified previously and a Backlog work order should therefore have been generated.




Example of a yellow cable tie on a leaking brake line



Closer view of the cable tie on the brake line

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Tagging Recorded Backlogs	DATE	CHG NO	NUMBER
	1/20/2016	00	1508-1.06-1384

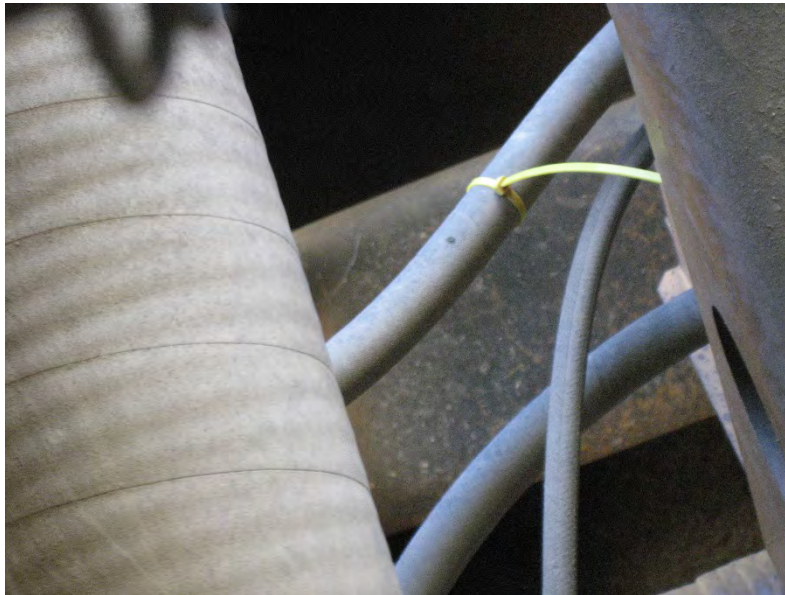

Example of a coolant line identified for backlog work

Missing bolts, broken brackets, failing pumps, starters, and most components can still be tagged. With cracks this is generally done with a paint pen already but is still the same principal.... marking the fault so it can be easily physically identified.

3.0 Implementation Steps

Write up a process document / flowchart that outlines the steps to identify faults and ensure it is tagged and recorded correctly in the work order management system. This should include...

1. The selection of a suitable tag and ensure this is used exclusively for Backlog identification. This tag should be easily visible, robust and may also have reference information written on it.
2. Establish a document and/or an electronic process to capture Backlog information and enter this directly into the work order management system
3. Ensure tags are applied to the machine and removed when the work is complete.
4. Establish a reporting system where a full and current Backlog report can be produced for a specific machine.
5. Establish a regular inspection program where the machine condition can be checked against the Backlog report and fault severity and therefore urgency can be escalated or reduced depending on condition.

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Tagging Recorded Backlogs	DATE 1/20/2016	CHG NO 00	NUMBER 1508-1.06-1384

4.0 Benefits

- Recorded Backlog faults can be easily identified physically on the machine during inspections.
- Technicians do not need to check paper or electronic records to see if the fault is recorded therefore saves Technician time.
- Technicians do not waste time writing up Backlog reports on faults they identified if it has already been recorded.
- Admin or Supervisor personnel do not waste time entering new Backlog reports that double up on existing entries and it avoids ordering parts twice for the same job.
- If other work is performed on the machine you can easily see other identified faults and these may be incorporated into the current work which saves time and helps reduce outstanding Backlog.

5.0 Resources Required

- A supply of suitable tags.

6.0 Supporting Attachments / References

N/A

7.0 Related Best Practices

- 1211-1.06-1295 - Backlog Management - Setting Effective Backlog Execution Targets
- 1007-2.0-1103 - Backlog Management

8.0 Acknowledgements

Written by Andy Reid – Caterpillar Global Mining, Melbourne Australia
 +61 3 99539136
Reid_Andrew_J@cat.com

Thank you to the team at WesTrac Boddington for supplying the photos.

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Tagging Recorded Backlogs	DATE 1/20/2016	CHG NO 00	NUMBER 1508-1.06-1384