

Elevate your practice with ETERNIA SELECT™, now available in a multitude of dimensions to cater to your diverse unblocking needs. Experience a new realm of possibilities for superior patient care.

ETERNIA SELECT™
EVEROLIMUS ELUTING CORONARY STENT SYSTEM

Diameter (mm)	Stent Length (mm)											
	8	12	16	20	24	28	32	36	40	44	48	52
2.00	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2.25	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2.50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2.75	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
3.00	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
3.50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
4.00	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
4.50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Device Technical Specification

Design	Open Cell Design
Stent Material	L605 Cobalt Chromium
Stent Design	Open Cell Design with Valley-to-Valley S Connectors (V2V S)
Stent Strut Width	WavFlo Struts: 65 ± 10 µm and Valley-to-Valley "S" Connectors: 55 ± 10 µm
Guide Wire Compatibility (Max)	0.014"(0.36 mm)
Polymers	Bio-degradable Polymers
Stent Strut thickness	60 ± 10 µm
Guiding Catheter (Inner Diameter)	5 Fr Compatible
Crossing Profile	1mm (≤ 1mm for 3.0 diameter)
Radial Strength (Force/Axial Length)	1.50 N/mm
Foreshortening	Nearly Zero
Flexibility	Excellent
Drug	Everolimus

Over-expansion Limit

Nominal Diameter (mm)	2.00 - 2.25 - 2.50 - 2.75 - 3.00	3.50 - 4.00 - 4.50
Number of Crowns	6	8
Post-Dilatation limit (mm)	4.00	5.50



Advant Navis Business Park Plot #7,
Office No:1012, B Wing, 10th Floor, Tower B,
Noida-Greater Noida Expy, Sector 142, Noida,
Uttar Pradesh, India 201 305.


Email: info@innvolution.com

Website: www.innovation.com

Manufacturing License No:
MFG/MD/2022/000680

Innovation Healthcare Global Pte Ltd
Marina Bay Financial Centre Tower 1,
Level 11, 8 Marina Boulevard
Singapore 018 981.

Stent manufacturing
Plot No-105, Solitaire Industrial Park,
Village Dehmikalan, Ajmer Road,
Jaipur, Rajasthan, India 303 007.

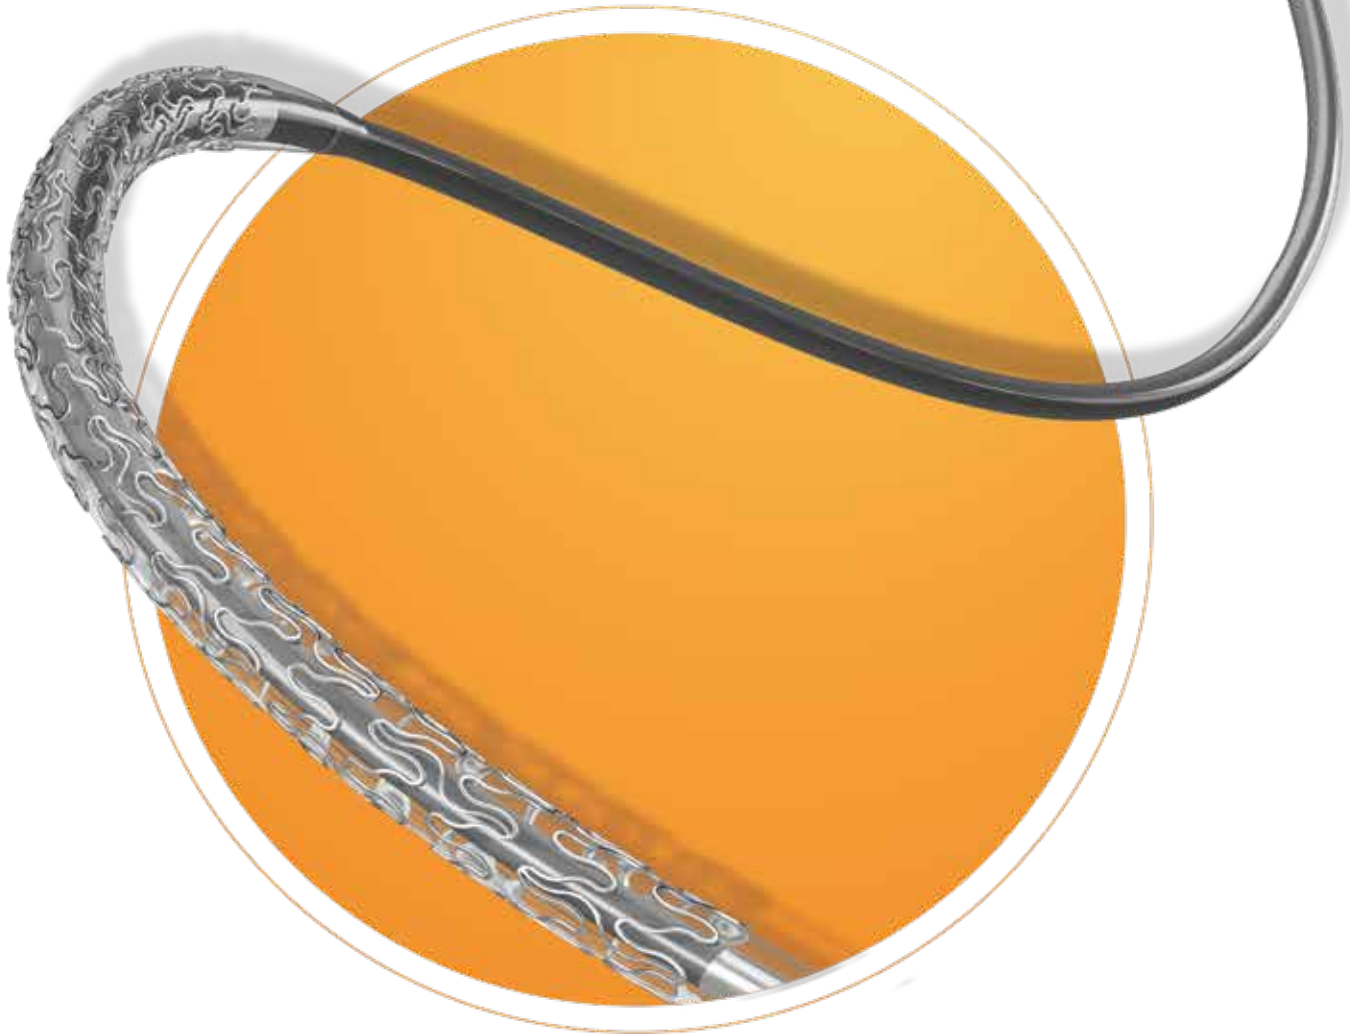


ETERNIA SELECT™

Everolimus Eluting Coronary Stent System


Unblock with Confidence!

Restore Circulation with ETERNIA *SELECT*[™]

What makes it the Future of Coronary Stenting?




60 µm Thin Struts




Everolimus

Enabling rapid absorption into the arterial wall



1 mm Crossing Profile

Improved deliverability with minimal injury




L605 Cobalt Chromium

High Radial Strength (Force/Axial Length) of 1.50 N/mm


Restore Circulation with ETERNIA *SELECT*[™]'s Design Crafted Platform

Crafted for Superior Delivery and Safety




Open Cell Design

Providing enhanced side branch access, better endothelial coverage and conforms best to angulated vessels.



Proprietary WavFlo Struts

- DES with thin struts up to 60 µm
- Enhancing trackability, crossability, and radial force, while reducing the risk of restenosis and thrombosis¹



Proprietary V2V S-connectors

- Valley-to-valley long 'S' Connectors
- For higher Flexibility, Deliverability, Radial Strength (Force/Axial Length) and conformability¹
- Lowering stent dislodgement force to minimum 6N in 12 mm stents²

Next-generation DES
Ensuring the well-being of your CAD patients!

CAD, coronary artery disease; DES, drug-eluting stent

1. Kozlik M, Harpula J, Chuchra PJ, et al. Drug-Eluting Stents: Technical and Clinical Progress. Biomimetics (Basel). 2023 Feb 9;8(1):72. doi: 10.3390/biomimetics8010072.

2. In-house data.