


Fixing the module from the aluminium ladder (short-duration task)

Instruction sheet · Author: Victor Malt · Stand 20.08.2026


1 This and nothing else

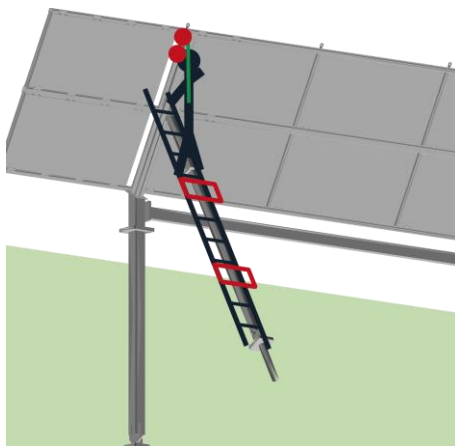

Fix the freshly craned module with 2 bolts, approx. 1 minute per bolt.
Every other bolt and fixing is done afterwards by the crew from the MEWP.

Any other work from the ladder is forbidden.


2 Order of protective measures

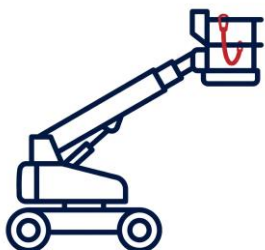

MEWP – covers approx. 95 % of the plant, always first choice.




Branach ladder with integrated fall-arrest system, where the MEWP cannot reach.

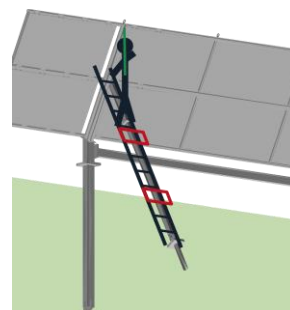


Aluminium ladder with Grillon – only for the short task described above.

Fixing points at 4.1 / 4.9 / 6.0 m. Above 2 m fall height PSaG is mandatory.

3 Before you climb



Ladder against the uphill column. Two points along the column, one strap each – against tipping, twisting and



Only one person on the ladder. Never work alone: the 2nd person stays within sight



Visual check of the PPE: harness, Grillon rope, karabiners, stitching. Withdraw




Not in strong wind / föhn, thunderstorm, rain or ice. Observe the Föhnwächter warning levels.

slipping. Also when you only climb up.


and earshot and is the rescuer.

damaged or fall-loaded equipment at once.

4 At the work position

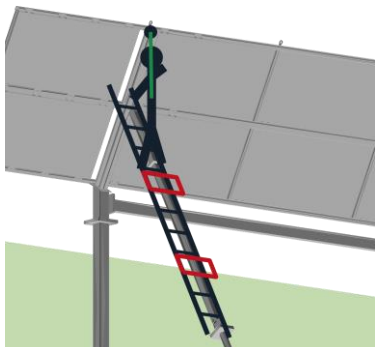

CORRECT – rope always taut. Secure yourself first, then work. Anchor point on the primary structure, as high as possible.

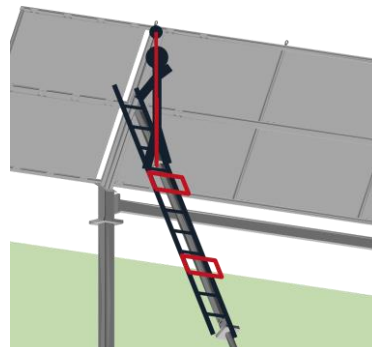

WRONG – slack rope. The Grillon is a work-positioning device, NOT a fall-arrest system. A free fall must not be possible.

Never unclip to reach further «just for a second». Changing position means: climb down, move the ladder, re-secure.


5 Forbidden




Harness loose or not clipped in.



Working alone with PSAgA.




Climbing along the structure.




Any other work from the ladder.

6 Rescue within minutes

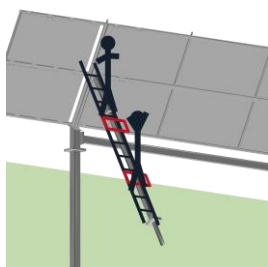

The 2nd person climbs up to the casualty.

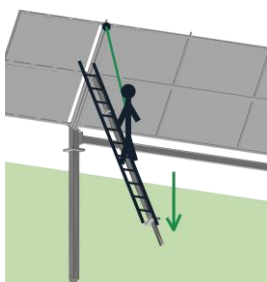

Opens the Grillon and lowers them to the ground under control. Then first aid.



Raise the alarm: 144 / REGA 1414. Then inform site management immediately.

Suspension trauma: nobody is left hanging. After recovery lay them flat and get a doctor. The rescue is practised on site – anyone who has not practised it does not act as rescuer.

7 Stop rule

Everyone may and must say STOP. If it cannot be done this way: stop and clarify with site management. No job is worth a fall.

Basis: PSAgA safety concept NalpSolar V1.0 of 01.07.2026 (Rev. C), author S. Gäumann, clauses 1.5–1.7 / 2.2 / 4.1–4.2 – confirmed without additions by the Suva (M. Scolieri) on 13.07.2026. Illustrations from the MAAG IFC model NalpSolar_51_PL_0351_A1 of 12.06.2025.