




TOP VIEW (PLANTA)

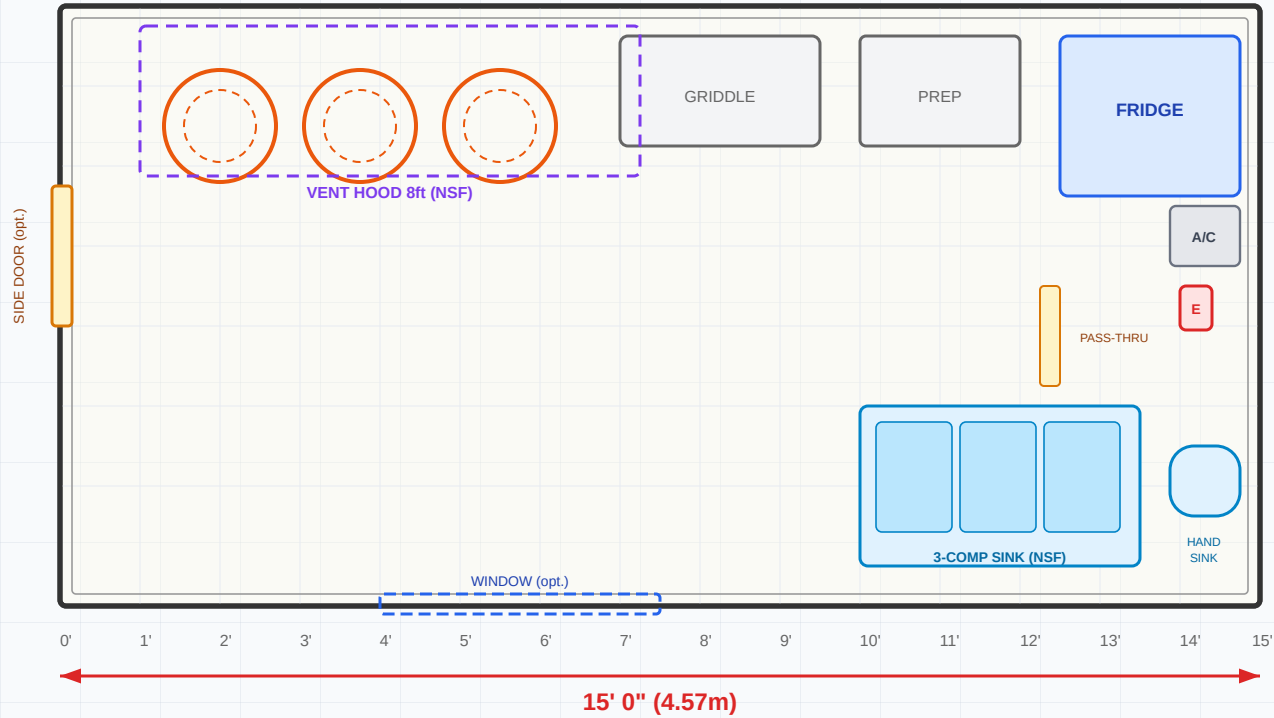


REAR VIEW (TRASERA)

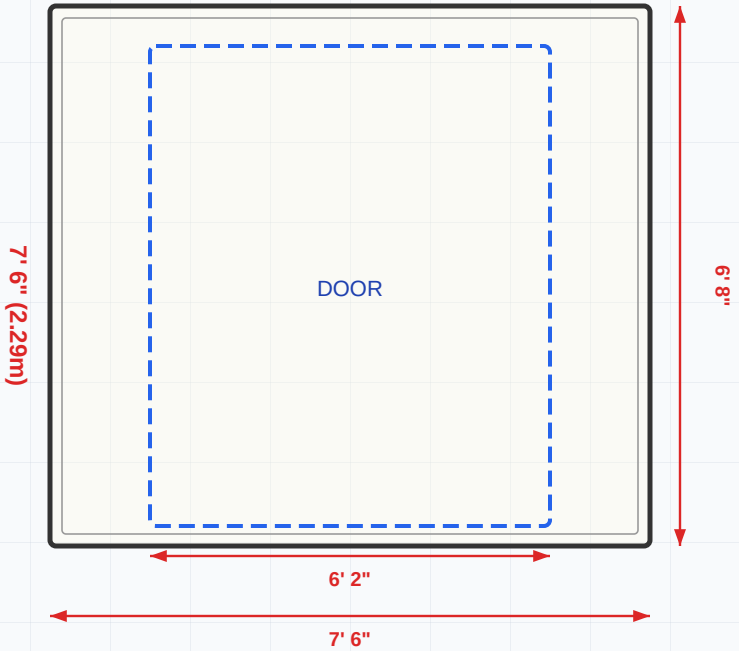

LEFT SIDE VIEW (LADO IZQUIERDO)

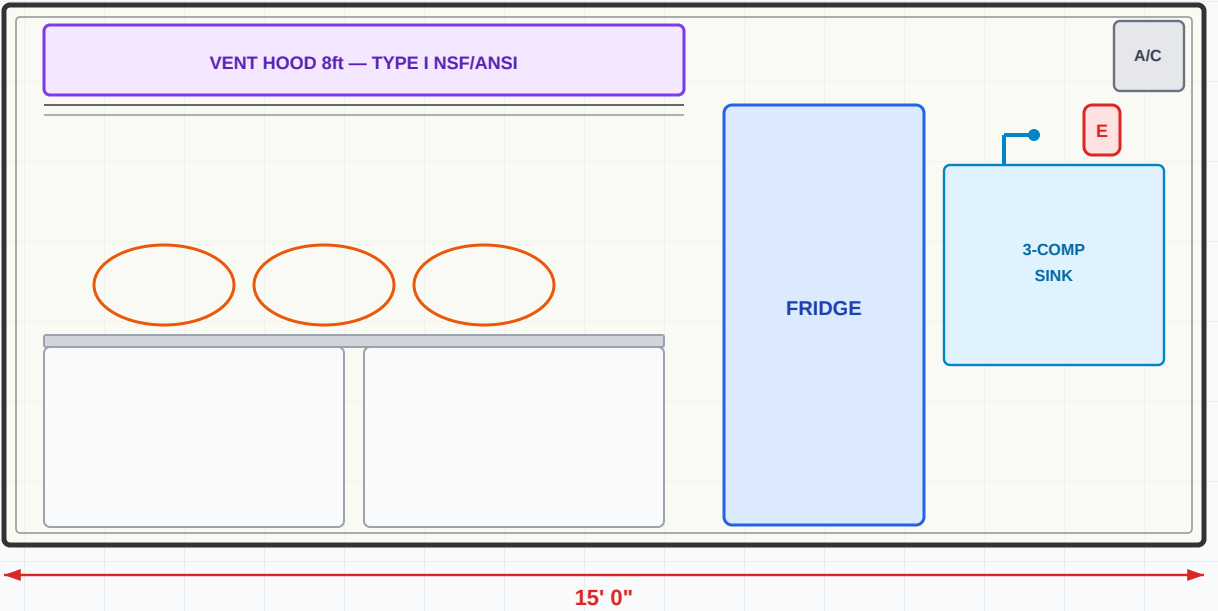

RIGHT SIDE VIEW (LADO DERECHO)

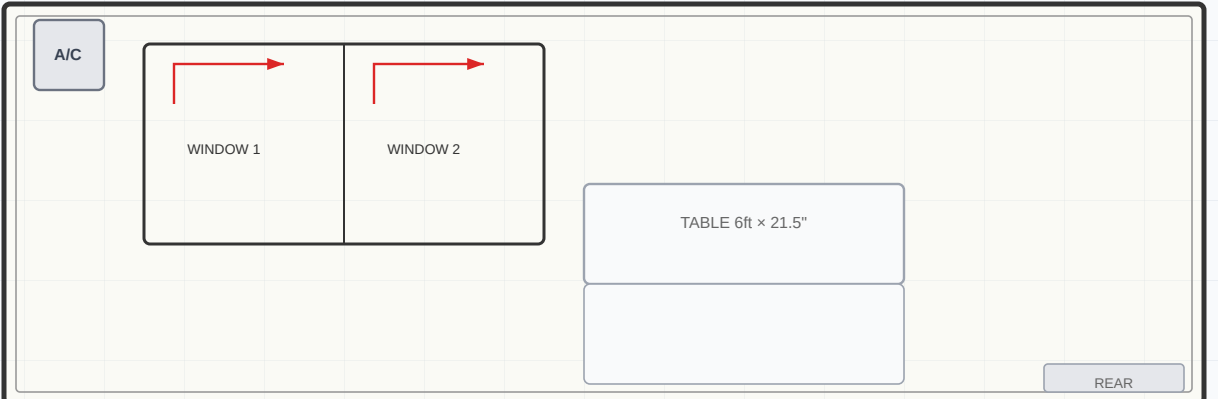

BOX SPECIFICATIONS

Interior Length	15' 0" (4.57m)
Interior Width	7' 6" (2.29m)
Interior Height	6' 8" (2.03m)
Floor Area	112.5 sq ft
Door Opening	6' 2"W × 6' 0"H
Frame	Steel tube 2"x3" welded
Scale	1 cuadro = 1 pie (40px)

INSULATED WALLS

Wall Material	Galvanized steel panels
Insulation Core	Polyurethane foam
Wall Thickness	2" (50mm)
R-Value	R-13 per inch
Interior Finish	FRP panels (food-grade)
Floor	Diamond-plate aluminum

VEHICLE / CHASSIS

Chassis Type	Single axle, 3,500 lb
GVWR	7,000 lbs
Hitch	2-5/16" ball coupler
Brakes / Tires	Electric brakes · ST225/75R15

NSF COMMERCIAL HOOD

Type	Type I — Grease rated
Length	8' 0" (2.44m)
CFM Rating	1,200 CFM
Material	430 Stainless Steel
Baffle Filters	SS removable, dishwasher safe
Fire Suppression	Ansul R-102 system
Certification	NSF/ANSI 2 · UL 710

NSF SINKS

3-Compartment Sink	
Compartment Size	15"W × 15"D × 12"H each
Material	18-gauge 304 Stainless Steel
Drainboards	Left & right, 18" each
Hand Wash Sink	
Size / Faucet	12"×12" · knee-valve faucet
NSF/ANSI 2 Certified	

LEGEND

Box structure	NSF Hood
Door / opening	NSF Sink
Optional element	Refrigeration
Dimension	1 cuadro = 1 pie



SPECS	FOLIO #
CUSTOMER	SHAMIN FOOD TRUCK
OFFICE	HOUSTON
DESTINATION	—
SIZE	15 × 7.5 × 6.8
MODEL	2025 Standard
FLOOR	Diamond Plate Aluminum
AXLES	Single — 3,500 lb
COLOR	—
A / C	1 Ton
LOUVER	Back
PLUMBING	Pex
CLEAN WATER TANK	30 Gal — Inox / Plastic
WASTE WATER TANK	40 Gal — Inox / Plastic
TANK CARRIER	Cage / Base
GENERATOR	Cage / Base
WINDOW SIZE	4' × 3' (1)
WINDOW TYPE	Slide — opt.
WHEELS	ST225/75R15
VENT HOOD	Type I NSF — Premium
VENT HOOD SIZE	8ft
WATER PUMP	70 Psi 1/2 hp 110v
SINK HANDWASH SPLASHGUARD	Stainless Steel Commercial NSF
GAS OUTLETS	YES
TOP AND BOTTOM FACINGS	Alum smooth
INSULATED WALLS	Polyurethane 2" — R-13 — FRP interior
WATER HEATER	Electric 4 Gal Instalado
SINK FAUCET	Spring
ELECTRICAL MAIN PLUG	L14-30 — 30A