# Data center resource management for in-network processing

Marco Micera

Politecnico di Torino, Technische Universität Darmstadt

### Introduction

"Modern Internet services, such as search, social networking, and e-commerce, critically depend on high-performance key-value stores. Rendering even a single web page often requires hundreds or even thousands of storage accesses."

NetChain [2] authors

"As the number of compute elements grows, and the need to expose and utilize higher levels of parallelism grows, it is essential to [...] focus on developing architectures that lend themselves better to providing extreme-scale simulation capabilities."

SHArP [1] authors

1

### In-Network Processing (INP)

- INP refers to the technique of offloading parts of the computation to network devices (e.g., programmable switches, network accelerators, middleboxes, etc.), hence reducing the load on servers
- Advantages:
  - 1. Serve network requests on the fly with low latency
  - 2. Reduce data center traffic and mitigate network congestion
  - 3. Save energy by running servers in a low-power mode
- Few solutions out there already: Daiet [4], SHArP [1], NetChain [2], IncBricks [3]

### Thesis goals

#### Problem statement

For the time being, it seems that there is still no Resource Manager (RM) that takes into account the presence of a network having a data plane that supports (partially or completely) INP


### **Goals**

- 1. Model and evaluate an API through which applications can ask for INP resources
- 2. Discuss the importance of a scheduler which can reject INP requests and propose their server-only equivalent when needed (e.g., high switch utilization)

3

# Design

### The Extended-Tenant Application Graph (eTAG)

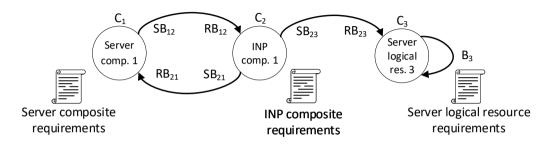


- A composite is a template that describes high-level logical components
  - It can be of two types:
    - Server (e.g., "web server", "database", ...)
    - INP (e.g., "IncBricks caching system", "NetChain locking system", ...)
  - It can be made out of
    - Other Composites
    - Logical resources

### **Generic groups**

- In-network storage
  - Switches must
    - dedicate part of their local memory to store a distributed map
    - form a chain
  - IncBricks [3], NetChain [2]
- In-network data aggregation
  - Switches must
    - form a tree whose root is connected to data consumers and whose leaves are connected to data producers
    - dedicate part of their local memory to store a key-value map
    - be able to perform basic operations on data, such as writing and hashing
    - wait for all its children to send aggregated data
  - Daiet [4], SHArP [1]


### Mapping composites to logical resources

• The *template database* maps composites (or generic groups) to their equivalent made out of just logical resources

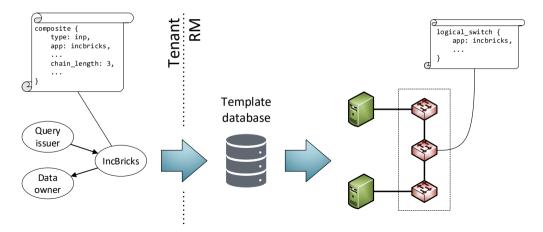


## Placing logical resources


- The placement algorithm places logical resources onto physical ones
- Three types of physical resources:
  - Server
  - Switch
  - Link

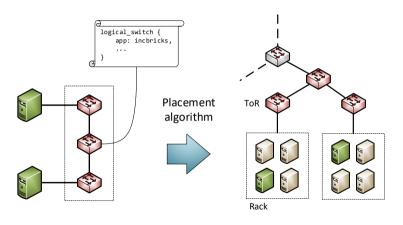


### The whole picture

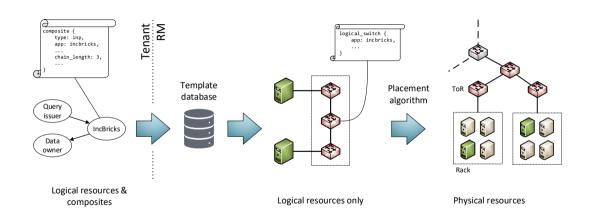

## $1^{st}$ approach: passive template mapping

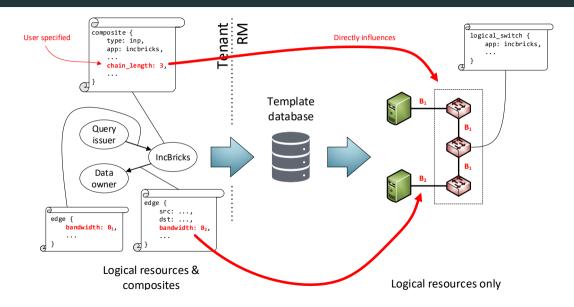

### 2<sup>nd</sup> approach: active template mapping

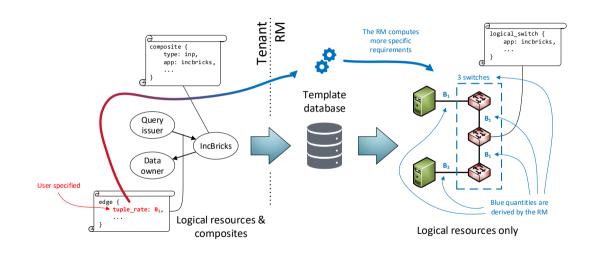

# Evaluation

## Simulation 1/2

- Simulator built from the ground up
  - Inspired by Omega's [5] lightweight simulator<sup>2</sup>
  - Supports multiple resource dimensions, switch resources, and composites
  - Switches have *properties* (e.g., supported INP solutions)
- Simulated data center physical architecture: fat-tree with 4 pods
- 3 days-long randomly-generated workload
  - Job properties (e.g., requirements, requests' interarrival time, etc.) are sampled from exponential distributions
- Simple greedy scheduler

 $<sup>^2</sup> Available\ at\ github.com/google/cluster-scheduler-simulator$ 

## Simulation 2/2

- The template database contains two entries for the previously-mentioned generic groups
  - In-network storage (switch chain)
  - In-network data aggregation (switch tree)
- Server Tasks Cutback (STC): the reduction of server tasks once an INP solution is introduced

$$STC = \frac{\#server \ tasks \ without \ INP}{\#server \ tasks \ with \ INP}$$
 (1)

Sweep: percentage of requests including INP composites

### Results 1/3

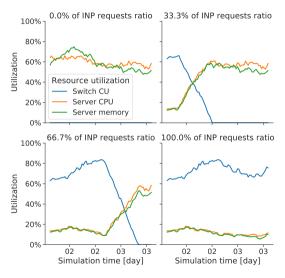


Figure 1: physical resource utilization for different amounts of INP requests

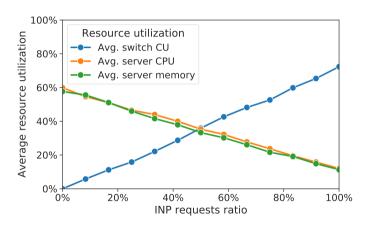


Figure 2: Average resource utilization as a function of the INP requests ratio

## Results 3/3

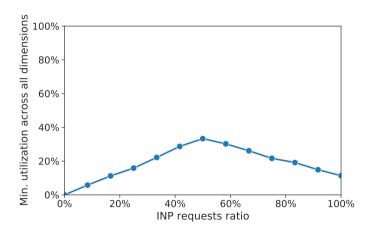


Figure 3: Minimum resource utilization across all dimensions

# **Conclusions**

### Conclusions

This thesis aims to foresee some features that an ideal fully-INP aware Resource Manager should have, as well as some open problems in the INP resource management field.

### Fully INP-aware RM features

- Conjunct placement of server and switch resources
- INP alternatives

### Open problems

- Accurately determine STC values for all INP solutions
- Determine the number of needed switch tasks for INP solutions
- Differentiate INP solutions based on their life cycle (e.g., short-term batch jobs vs. long-term services)





## Bibliography i



R. L. Graham, D. Bureddy, P. Lui, H. Rosenstock, G. Shainer, G. Bloch, D. Goldenerg, M. Dubman, S. Kotchubievsky, V. Koushnir, et al.

Scalable hierarchical aggregation protocol (sharp): a hardware architecture for efficient data reduction.

In Proceedings of the First Workshop on Optimization of Communication in HPC, pages 1–10. IEEE Press, 2016.



X. Jin, X. Li, H. Zhang, N. Foster, J. Lee, R. Soulé, C. Kim, and I. Stoica. **Netchain: Scale-free sub-rtt coordination.** 

In 15th USENIX Symposium on Networked Systems Design and Implementation (NSDI 18), pages 35–49, Renton, WA, 2018. USENIX Association.

### Bibliography ii



A. Sapio, I. Abdelaziz, A. Aldilaijan, M. Canini, and P. Kalnis.

In-network computation is a dumb idea whose time has come.

In *Proceedings of the 16th ACM Workshop on Hot Topics in Networks*,

HotNets-XVI, pages 150–156, New York, NY, USA, 2017. ACM.

## Bibliography i



M. Schwarzkopf, A. Konwinski, M. Abd-El-Malek, and J. Wilkes.

Omega: flexible, scalable schedulers for large compute clusters.

In SIGOPS European Conference on Computer Systems (EuroSys), pages 351–364, Prague, Czech Republic, 2013.