

Over The Air Computing

Master Thesis

Department of Electrical & Computer Engineering

University of Western Macedonia

Markos Delaportas *

April 2026

Abstract –

2.c	Optimization Strategies to Enhance OAC Performance	6
3	Experimental Implementation using SDR and MATLAB	7
3.a	Experimental Layout and Network Topology	7
3.b	Design and Implementation of the OAC Protocol	7
3.b.i	Selection of the OAC Scheme for Demonstration	7
3.b.ii	Synchronization Mechanisms	7
3.b.iii	Pre-processing and Channel Compensation Implementation	7
3.c	Measurement and Data Collection Methodology	7
4	Experimental Results and Discussion	7
4.a	Validation of the Implemented OAC Network	7
4.b	Performance Evaluation under Impairments	7
5	Conclusion and Future Work	8
5.a	Summary of Thesis Findings	8
5.b	Future Research Directions	8
A	MATLAB Code for OTA Simulation	8

List of Acronyms and Abbreviations

AWGN	Additive White Gaussian Noise 6
CSI	Channel State Information 6
IoT	Internet of Things 1
ISI	Inter-Symbol Interference 6
MAC	Multiple Access Channel 4
MIMO	Multiple-Input Multiple-Output 6, 8
MSE	Mean Squared Error 6
OAC	Over-the-Air Computation 1, 3
SDR	Software Defined Radio 3, 7
TDMA	Time-Division Multiple Access 7

Introduction

Over the Air Computing offers a paradigm shift in how distributed computations are performed in wireless networks. By exploiting the inherent properties of the wireless medium, OAC enables simultaneous transmissions from multiple devices to be combined in a way that directly computes a desired function of the transmitted data. This technique has garnered significant attention due to its potential to enhance efficiency and reduce latency in applications such as federated learning, distributed sensing, and real-time analytics. The motivation behind this thesis is to explore the practical implementation of OAC using Software Defined Radios Software Defined Radio (SDR) and MATLAB, addressing the challenges associated with synchronization, channel impairments, and waveform design. The research objectives include designing a prototype OAC network, validating its performance, and analyzing the impact of various impairments on computation accuracy.

0.a Background and Motivation

The increasing need for efficiency in computation-oriented applications where the interest lies in a function of local information, rather than the information itself [1]. The conventional approach of separating communication and computation often proves suboptimal [1], [2], [3]. The potential of OAC Computation is to achieve significantly higher computation rates by harnessing interference through signal superposition in a wireless Multiple Access Channel (MAC) [1].

0.b Problem Statement and Research Objectives

Focusing on designing and validating a practical OAC network layout suitable for implementation in a controllable environment[1]. The specific role of Software Defined Radios (SDRs) and MATLAB/simulation tools for prototype validation and addressing practical limitations such as synchronization and channel impairments [1], [4], [5].

0.c Thesis Contributions and Organization

1 Over-the-Air Computation: Foundations and Techniques

1.a Theoretical Foundations of OAC

- *Signal Superposition in the Multiple Access Channel (MAC)*: The distinct feature of OAC where computation is handled by harnessing interference via simultaneous transmissions [1], [3].
- *Nomographic Functions*: Defining the class of functions computable via OAC, which can be expressed as a post-processed sum of pre-processed sensor readings [1], [2], [3], [6].
- *Examples of Nomographic Functions*: Arithmetic mean, weighted sum, maximum/minimum value, and modulo-2 sum[1], [3], [5].

1.b OAC Schemes and Implementation Strategies

1.b.i Nomographic Functions

The nomographic functions are the functions that depict the behavior of the OAC schemes. In this thesis project I will focus on how different schemes can be used to compute the arithmetic mean of the transmitted data.

- *Analog vs. Digital OAC*: Reviewing uncoded analog transmission (often optimal for simple Gaussian sensor networks) versus digital schemes designed for modern systems (e.g., using QAM or one-bit quantization)[5], [7].

- *Coherent Schemes (CSI Dependent)*: Discussing methods requiring Channel State Information (CSI), such as Truncated Channel Inversion (TCI) or Zero-Forcing (ZF) coordination, for phase and amplitude alignment[1], [7], [8].
- *Non-Coherent Schemes (CSI Independent)*: Examining techniques robust to synchronization errors, such as those using Orthogonal Signaling (FSK/PPM)[1], [9].

In this section I will demonstrate the Raised Cosine method in order to take advantage of the signal superposition in the Multiple Access Channel (MAC). More specifically I will implement three devices transmitting simultaneously to a fusion center. The transmitted data will be pre-processed using the Raised Cosine method in order to mitigate the intersymbol interference (ISI) that is inherent in digital communication transceivers. The flowgraph of the implementation is shown in Fig. 1. In it three devices pick a character from a sequence of characters, unpack it to separate bytes and perform the mapping to the constellation points. The resulting symbols are then passed through a Raised Cosine filter and transmitted simultaneously to the fusion center. The fusion center performs the matched filtering and the necessary post-processing to compute the desired function of the transmitted data.

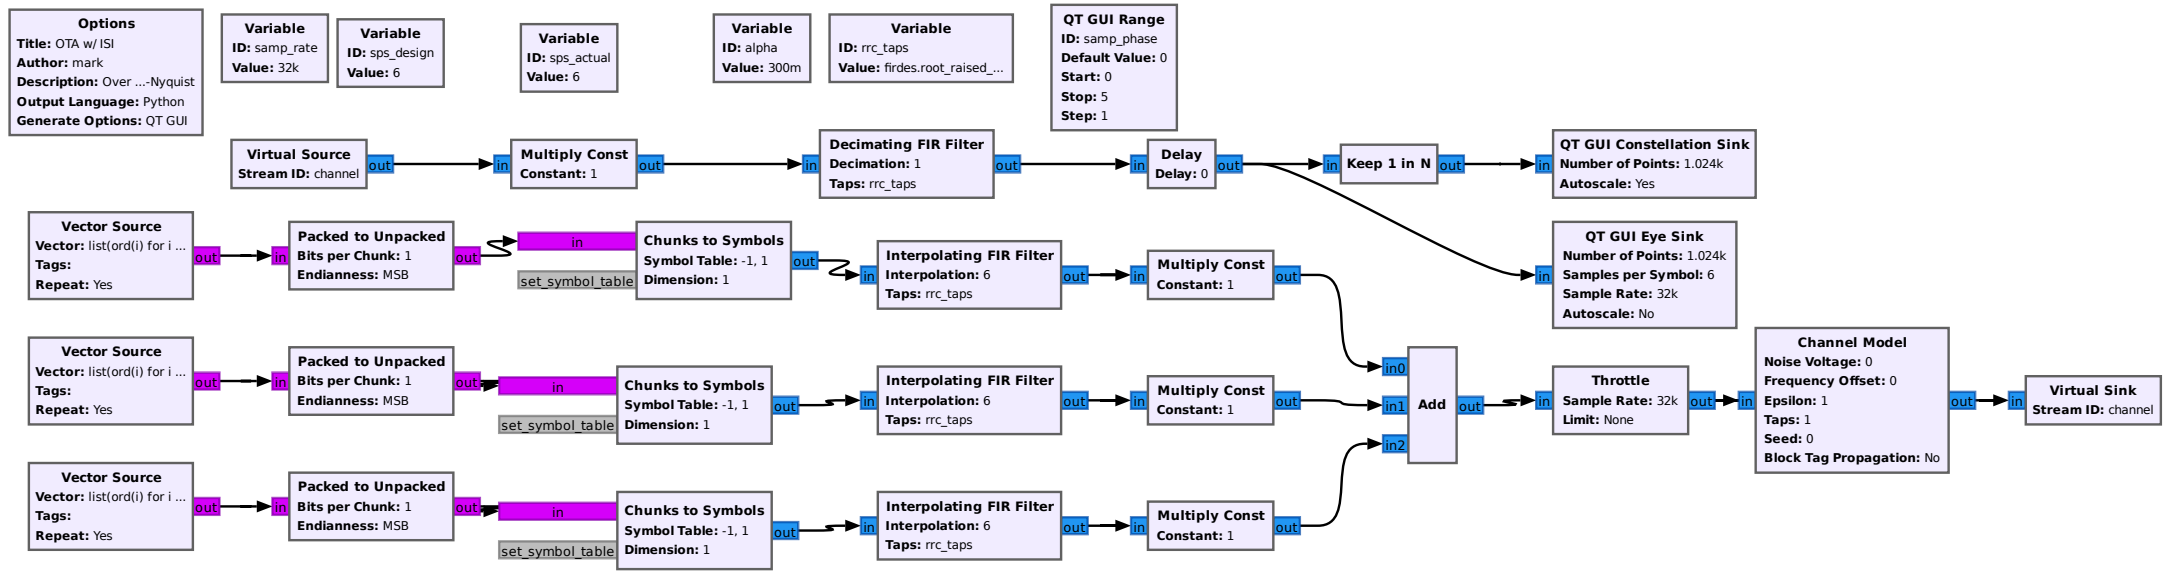


Figure 1: GNU Radio Companion flowgraph for the OTA implementation including ISI considerations.

1.c Applications Context (e.g., Distributed Consensus)

Application choice (e.g., Federated Edge Learning (FEEL) for gradient aggregation, or average consensus in (Wireless Sensor Networks (WSNs))

[1], [8], [9], [10], [11].

2 System Model and Practical Challenges in OAC

2.a System Architecture and Channel Model

- *Modeling the Network*: Description of Edge Devices (EDs) transmitting to an Edge Server (ES)/Fusion Center (FC), possibly involving multiple antennas (Multiple-Input Multiple-Output (MIMO)) [1], [8], [9], [11], [12].
- *Wireless Channel Model*: Consideration of channel impairments, including fading (e.g., Rayleigh fading), noise (Additive White Gaussian Noise (AWGN)), and path loss [5], [7], [8].

2.b Impact of Practical Impairments on OAC Reliability

2.b.i Synchronization Errors

Time, Frequency, and Phase Offsets (TO, CFO, PO): The detrimental impact of imperfect time-of-arrivals and phase alignment on signal superposition and computation accuracy [1], [5], [12].

```
1      % This is a comment
2      x = linspace(0, 2*pi, 100);
3      y = sin(x) + 0.5 * randn(size(x)); % Numbers like 0.5 will be in Math Font
4      plot(x, y);
```

2.b.ii Channel State Information (CSI) Imperfection

The need for accurate and fresh Channel State Information (CSI) at transmitters or receivers for many precoding/equalization techniques [1], [5], [9].

2.b.iii Waveform and Filter Design

Addressing time sampling error and intersymbol interference Inter-Symbol Interference (ISI) inherent in digital communication transceivers when applied to OAC [5].

2.c Optimization Strategies to Enhance OAC Performance

- *Power Management*: Strategies to mitigate aggregation errors, such as optimizing power control policies to minimize Mean Squared Error Mean Squared Error (MSE) or maximize convergence speed [1], [5], [8].
- *Transceiver Design*: Joint design of pre-processing functions, precoders/beamformers, and post-processing functions (decoders) to match the channel to the desired function and minimize distortion [1], [3], [9], [12].

3 Experimental Implementation using SDR and MATLAB

3.a Experimental Layout and Network Topology

- *Layout Description*: Presentation of the network structure (e.g., a single-cell OAC scenario or an ad-hoc network) using SDR to represent Edge Devices (EDs) and a Fusion Center (FC)[1].
- *Hardware and Software Tools*: Specific mention of the SDR and the use of MATLAB for waveform generation, digital signal processing, control loops, and simulation[1], [4], [7], [9].

3.b Design and Implementation of the OAC Protocol

3.b.i Selection of the OAC Scheme for Demonstration

Choice of Target Function (e.g., Arithmetic Mean or Majority Vote): Justification based on practical implementation constraints of SDR[1].

3.b.ii Synchronization Mechanisms

Detailed methodology for achieving coarse block synchronization or mitigating synchronization errors (TO/CFO) in the SDR/MATLAB environment (e.g., based on trigger signals or custom control loops)[1], [7], [9].

3.b.iii Pre-processing and Channel Compensation Implementation

Implementation of the chosen modulation/encoding scheme and any necessary pre-equalization (e.g., Channel Inversion precoding if a coherent scheme is selected, or non-coherent coding if robustness is prioritized)[1], [7].

3.c Measurement and Data Collection Methodology

Procedure for varying network parameters (e.g., number of transmitting devices, transmit SNR)[5].

4 Experimental Results and Discussion

4.a Validation of the Implemented OAC Network

Demonstration of successful signal superposition and computation via the SDR platform[1], [2]. Comparison of achieved computation result against the ideal theoretical value[1], [7].

4.b Performance Evaluation under Impairments

Quantifying the performance metrics, such as Mean Squared Error (MSE) or Computation Error Rate (CER), of the implemented scheme[1], [5]. Analysis of the impact of deliberately introduced synchronization errors or varying channel noise (SNR) on the computation accuracy[1], [5]. Comparison with Separation Schemes (Simulated Baseline); Illustrating the resource savings and computation rate achieved by the OAC approach relative to traditional orthogonal access (e.g., Time-Division Multiple Access (TDMA))[1], [2], [3].

5 Conclusion and Future Work

5.a Summary of Thesis Findings

Recap of the feasibility and performance demonstrated by the SDR-based OAC network.

5.b Future Research Directions

Exploring more complex OAC architectures, such as multi-antenna systems MIMO or using Reconfigurable Intelligent Surfaces (RIS)[5], [11]. Further investigation into standardized OAC protocols for compatibility with modern wireless networks (e.g., LTE/5G protocols)[1], [7].

A MATLAB Code for OTA Simulation

This appendix contains the core MATLAB scripts used to generate the simulation data discussed in Chapter 2. Note that we utilized the Raised Cosine method [1].

References

- [1] A. Şahin and R. Yang, “A survey on over-the-air computation,” *IEEE Communications Surveys & Tutorials*, vol. 25, no. 3, pp. 1877–1908, 2023, ISSN: 1553-877X, 2373-745X. DOI: 10.1109/COMST.2023.3264649 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/10092857/>
- [2] M. Goldenbaum, H. Boche, and S. Stanczak, “Analyzing the space of functions analog-computable via wireless multiple-access channels,” in *2011 8th International Symposium on Wireless Communication Systems*, Aachen, Germany: IEEE, Nov. 2011, pp. 779–783, ISBN: 978-1-61284-402-2 978-1-61284-403-9 978-1-61284-401-5. DOI: 10.1109/ISWCS.2011.6125268 Accessed: Dec. 4, 2025. [Online]. Available: <http://ieeexplore.ieee.org/document/6125268/>
- [3] M. Goldenbaum and S. Stanczak, “Robust analog function computation via wireless multiple-access channels,” *IEEE Transactions on Communications*, vol. 61, no. 9, pp. 3863–3877, Sep. 2013, ISSN: 0090-6778. DOI: 10.1109/TCOMM.2013.072913.120815 Accessed: Dec. 4, 2025. [Online]. Available: <http://ieeexplore.ieee.org/document/6573232/>
- [4] Y. Xiao, Y. Ye, S. A. Tegos, P. D. Diamantoulakis, Y. You, and G. K. Karagiannidis, “Heterogeneous wireless federated learning framework via over-the-air computation,” *IEEE Transactions on Vehicular Technology*, pp. 1–14, 2025, ISSN: 0018-9545, 1939-9359. DOI: 10.1109/TVT.2025.3600821 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/11131470/>
- [5] N. G. Evgenidis et al., “Waveform design for over-the-air computing,” *IEEE Transactions on Wireless Communications*, pp. 1–1, 2025, ISSN: 1536-1276, 1558-2248. DOI: 10.1109/TWC.2025.3613838 arXiv: 2405.20877[cs]. Accessed: Dec. 4, 2025. [Online]. Available: <http://arxiv.org/abs/2405.20877>
- [6] M. Goldenbaum, H. Boche, and S. Stanczak, “Nomographic functions: Efficient computation in clustered gaussian sensor networks,” *IEEE Transactions on Wireless Communications*, vol. 14, no. 4, pp. 2093–2105, Apr. 2015, ISSN: 1536-1276. DOI: 10.1109/TWC.2014.2380317 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/6981966>
- [7] G. Zhu, Y. Du, D. Gunduz, and K. Huang, “One-bit over-the-air aggregation for communication-efficient federated edge learning: Design and convergence analysis,” *IEEE Transactions on Wireless Communications*, vol. 20, no. 3, pp. 2120–2135, Mar. 2021, ISSN: 1536-1276, 1558-2248. DOI: 10.1109/TWC.2020.3039309 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/9272666/>
- [8] X. Cao, G. Zhu, J. Xu, Z. Wang, and S. Cui, “Optimized power control design for over-the-air federated edge learning,” *IEEE Journal on Selected Areas in Communications*, vol. 40, no. 1, pp. 342–358, Jan. 2022, ISSN: 0733-8716, 1558-0008. DOI: 10.1109/JSAC.2021.3126060 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/9606731/>

- [9] K. Yang, T. Jiang, Y. Shi, and Z. Ding, "Federated learning via over-the-air computation," *IEEE Transactions on Wireless Communications*, vol. 19, no. 3, pp. 2022–2035, Mar. 2020, ISSN: 1536-1276, 1558-2248. DOI: 10.1109/TWC.2019.2961673 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/8952884/>
- [10] H. Yang, X. Chen, L. Huang, S. Dey, and L. Shi, "Distributed average consensus via noisy and noncoherent over-the-air aggregation," *IEEE Transactions on Control of Network Systems*, vol. 12, no. 1, pp. 64–73, Mar. 2025, ISSN: 2325-5870, 2372-2533. DOI: 10.1109/TCNS.2024.3432827 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/10607888/>
- [11] J. Zhu, Y. Shi, Y. Zhou, C. Jiang, W. Chen, and K. B. Letaief, "Over-the-air federated learning and optimization," *IEEE Internet of Things Journal*, vol. 11, no. 10, pp. 16 996–17 020, May 15, 2024, ISSN: 2327-4662, 2372-2541. DOI: 10.1109/JIOT.2024.3352280 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/10388035/>
- [12] H. Hellström, S. Razavikia, V. Fodor, and C. Fischione, "Optimal receive filter design for misaligned over-the-air computation," in *2023 IEEE Globecom Workshops (GC Wkshps)*, Kuala Lumpur, Malaysia: IEEE, Dec. 4, 2023, pp. 1529–1535, ISBN: 979-8-3503-7021-8. DOI: 10.1109/GCWkshps58843.2023.10464656 Accessed: Dec. 4, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/10464656/>