


Figure 3 · pairing and duplicate diagnostic


Expanded inspection: −20 to −5 dB | 17 retained strongest pairs + 343 weaker-report combinations

Same source-defined horizontal readout allowance: 16 April 06:00:36–20:26:03 UTC. All 360 combinations are classified.

A Publication · enlarged Figure 3 region

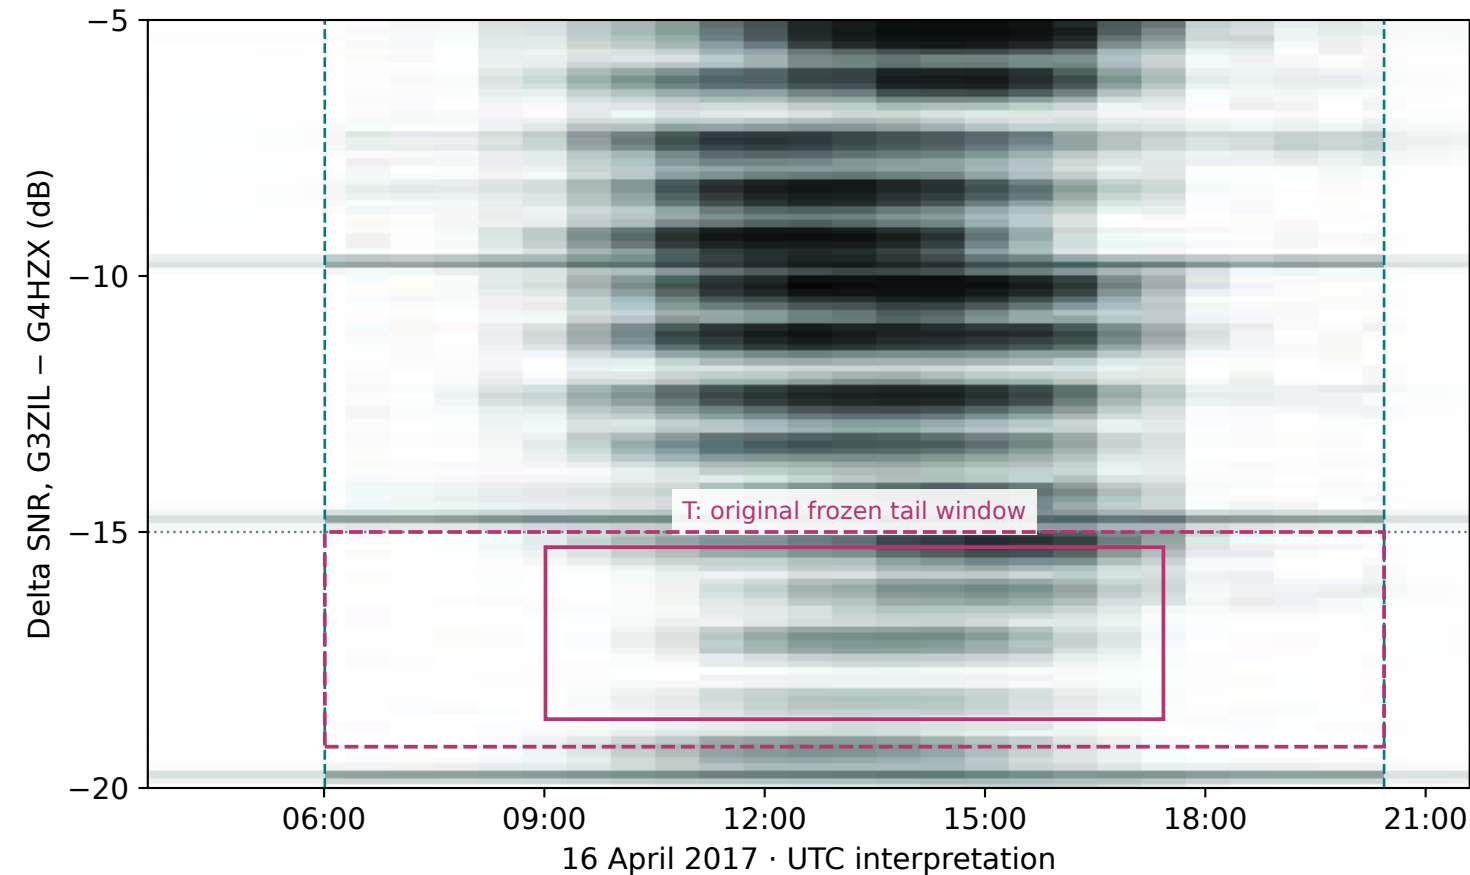

B Frozen archive · strongest pairs and weaker combinations

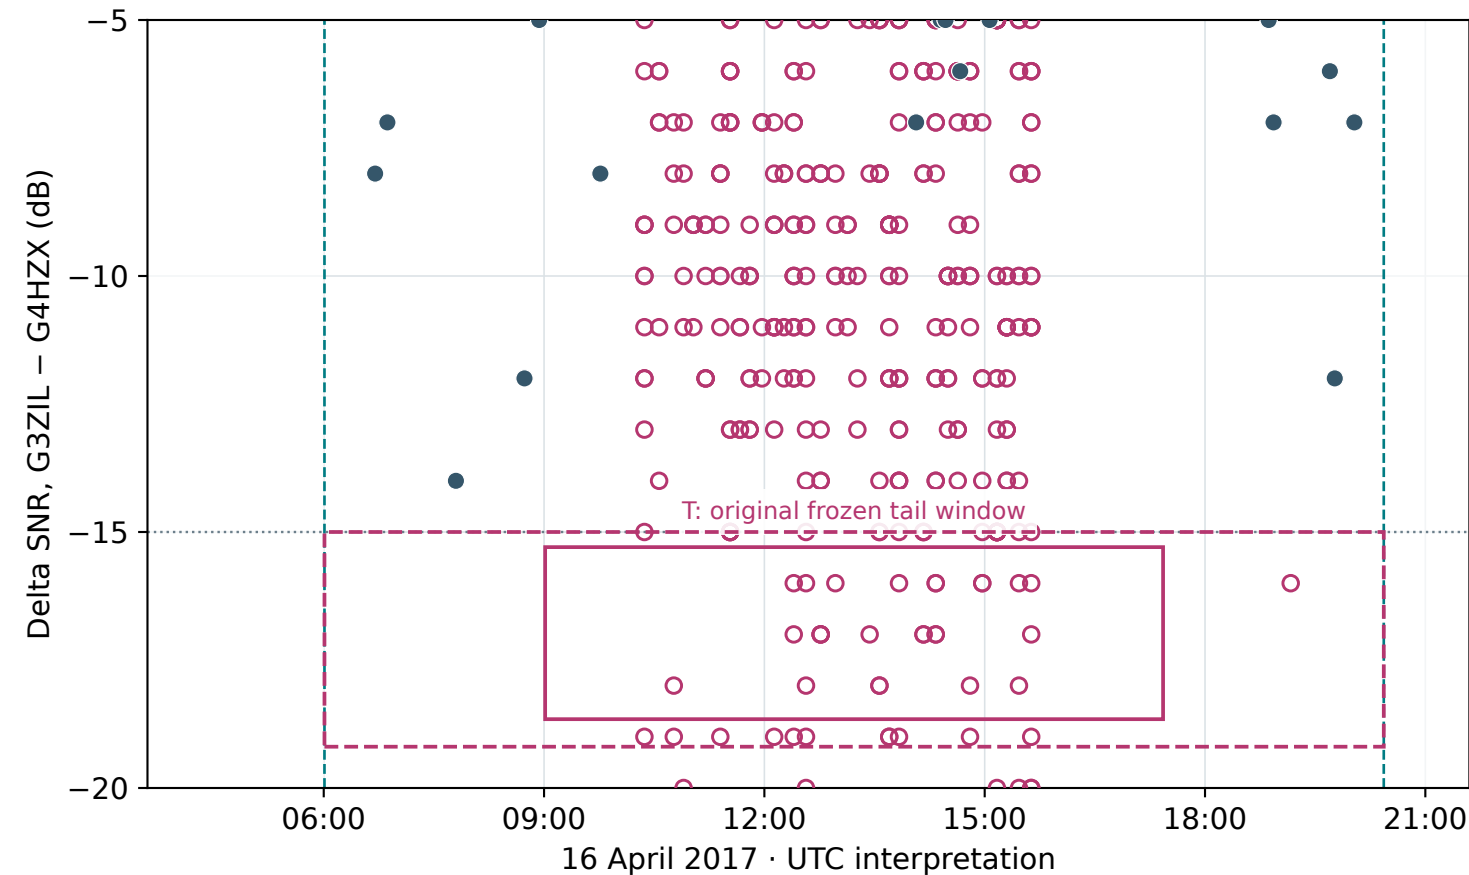

- 17 WSPRadar strongest-report pairs
- 343 additional weaker-report combinations
- Unchanged source horizontal readout allowance
- T: original narrow region and pixel allowance (0 strongest / 38 combinations)

The added combinations use at least one weaker endpoint report from a repeated same-cycle transmission: 342 involve HB9MHB and one DL9GCW. The strongest-report policy retains one difference per transmitter identity and cycle. All 17 strongest combinations here match retained demo pairs.

This wider diagnostic range is not a new paper-derived assertion. The original source box, strict $\Delta\text{SNR} < -15$ dB test and expected mismatch remain unchanged. Counts are archive calculations; overlapping paper pixels cannot establish 360 separately visible points or statistically independent events.

Alternative join: every same-time, same-transmitter/locator G3ZIL report × every G4HZX report. Equal reported TX powers cancel in each difference. This can explain the negative plume without proving the authors' query. Source: Practical Wireless, October 2017, p. 24, Figure 3; no fitted shift or offset.