

Electronics Project

Day 01: Timers

contact@42 chips.fr

Summary: Tic Tac, Tic Tac, Tic Tac.

Chapter I


Introduction

In electronics, a counter is a digital integrated circuit designed to count the number of pulses applied to its input.

It is composed of a certain number of D, T or JK flip-flops.

The simplest counter is obtained by cascading a series of T flip-flops, with the signal to be counted being applied to the input of the first flip-flop; the output of this flip-flop drives the input of the second flip-flop and so on.

The result of the counting appears in the form of a binary number, with the first flip-flop indicating the least significant digit.

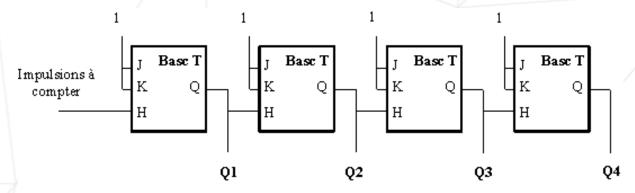

The capacity of the counter is the maximum number of pulses it can totalize. It is equal to 2^N for a binary counter.

If the capacity is exceeded, the counter returns to 0 and starts counting again.

But enough joking around, let's now see what interests us the most. How to do it in minecraft.

Chapter II


General instructions

Unless explicitly stated otherwise, the following instructions will be valid for all assignments.

- The language used for this project is C.
- It is not necessary to code according to the 42 norm.
- The exercises are ordered very precisely from the simplest to the most complex. Under no circumstances will we consider or evaluate a complex exercise if a simpler one is not perfectly successful.
- You <u>must not</u> leave <u>any</u> files other than those explicitly specified by the exercise instructions in your directory during peer evaluation.
- All technical answers to your questions can be found in the datasheets or on the Internet. It is up to you to use and abuse these resources to understand how to complete your exercise.
- You <u>must</u> use the datasheet of the microcontroller provided to you and comment on the important parts of your program by indicating where you found the clues in the document, and if necessary, explaining your approach. Don't write long blocks of text, keep it clear.
- Do you have a question? Ask your neighbor to the right or left. You can ask in the dedicated channel on the Piscine's Discord, or as a last resort, ask a staff member.

Chapter III

Tic & tac

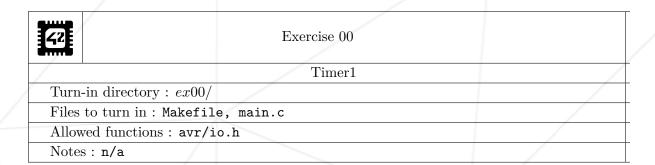

- You must write a program that turns on and off the LED D2 (PB1) at a frequency of 1Hz.
- You must configure the registers of the Timer1 to control the LED.
- The infinite loop of the program must remain empty.
- And you must not use PORTX.



You must explain the function and values assigned to the registers in comments each time!

Day 01: Timers

Exercise 01	
Duty cycle	
Turn-in directory : $ex01/$	
Files to turn in : Makefile, main.c	
Allowed functions: avr/io.h	
Notes · n/a	

- \bullet You are required to write a program that turns on and off LED D2 (PB1) at a frequency of 1Hz with a duty cycle of 10%.
- You must configure the registers of Timer1 to control the LED.
- The infinite loop of your program must remain empty.
- You must not use PORTX.