Progress Presentation-I

e-Yantra Summer Intership-2016
Formation Control of Multiple Swarm Robots

Om Singh
Chirag Shah
Mentor 1: Abhinav Sarkar
Mentor 2: Avinash Dubey

IIT Bombay

July 6, 2017

Overview of Project

Project Name: Formation Control of Multiple Swarm Robots
Objectives:

1. Implement formation control over a group of Spark V robot using overhead camera and aruco markers for localization of the robot
2. Implement swarm behaviors like disperse, follow the leader etc

Deliverables:

▶ Robots capable of making any desired formation
▶ Robots capable of implementing Swarm behaviors

Overview of Task

No.	Task	Deadline
1.	Python,Spark V ,OpenCV introduction interface Xbee	2days
2.	Position and orientation calculation of multiple Spark V robots	3 Days
3.	Go-to-goal for a single Spark V	4 Days
4.	Formation testing for 2-3 robots	2 Days
5.	Algorithm for formation control of multiple robots	3 Days
6.	Avoid obstacle controller	3 Days
7.	Algorithm testing and fine tuning Scaling up the number of robots	3 Days
8.	Local Swarm behaviors	8 Days

Task Accomplished

Task Completed

- ▶ Cropping and transforming the arena area inside the black border
- ▶ The position and orientation (x, y,Φ) of Multiple robots can be found using aruco markers placed on the robot

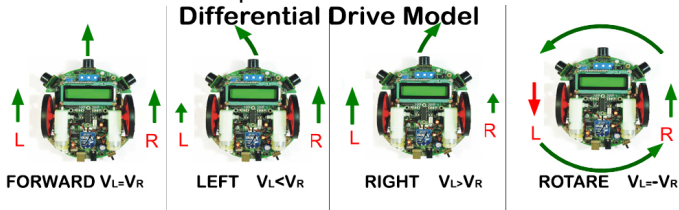Opencv-Contrib-python (aruco library)
https://github.com/opencv/opencv_contrib

Task Accomplished

- Selected suitable equations for the differential drive robot

Differential Drive Model

FORWARD $V_L=V_R$ LEFT $V_L<V_R$ RIGHT $V_L>V_R$ ROTARE $V_L=-V_R$

- (x, y, θ) of each robot is transmitted via XBee to the robot. The desired location (xg, yg, ϕ) is also transmitted. The XBees are configured in a star configuration
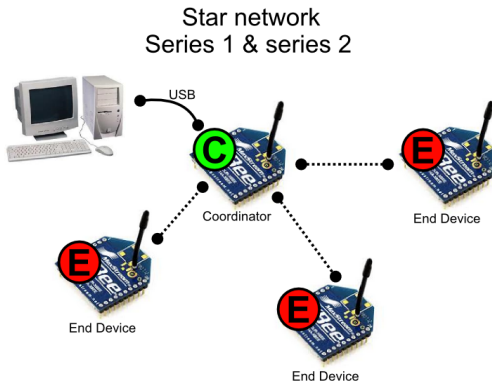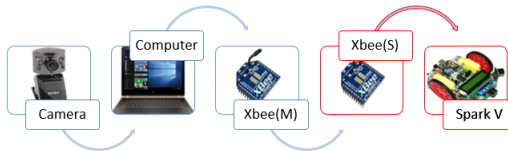
- Suitable Equation for the differential drive robot.

- (x, y, θ) of each robot is transmitted via XBee to the robot. The desired location (xg, yg, ϕ) is also transmitted. The XBees are configured in a star configuration.

Task Accomplished

Star network
Series 1 & series 2

Task Accomplished

▶ The robot can turn and move towards the required location using a P controller for differential drive

Next Tasks

- ▶ Implementing a PID controller on the robot to increase the precision of Go-To-Goal
- ▶ Go-to-Goal for multiple robots

Challenges Faced

▶ Communication between computer(Master) and robot(Slave) to transmit the robots initial state and desired state (x, y, Φ)(Serial Communication Protocol)

▶ Developing an effective differential drive robot model for the Spark V

▶ Conversion from unicycle model to differential drive model

▶ Implementing Go-to-goal controller using P controller algorithm on the Spark V

Future Plans

▶ Communication of Master(PC) to Multiple slaves(Spark V)

▶ Multiple robots capable of moving to a point selected manually

▶ Multiple robots making pre-defined formation

▶ Swarm behaviors like "follow the leader"

Thank You

THANK YOU !!!