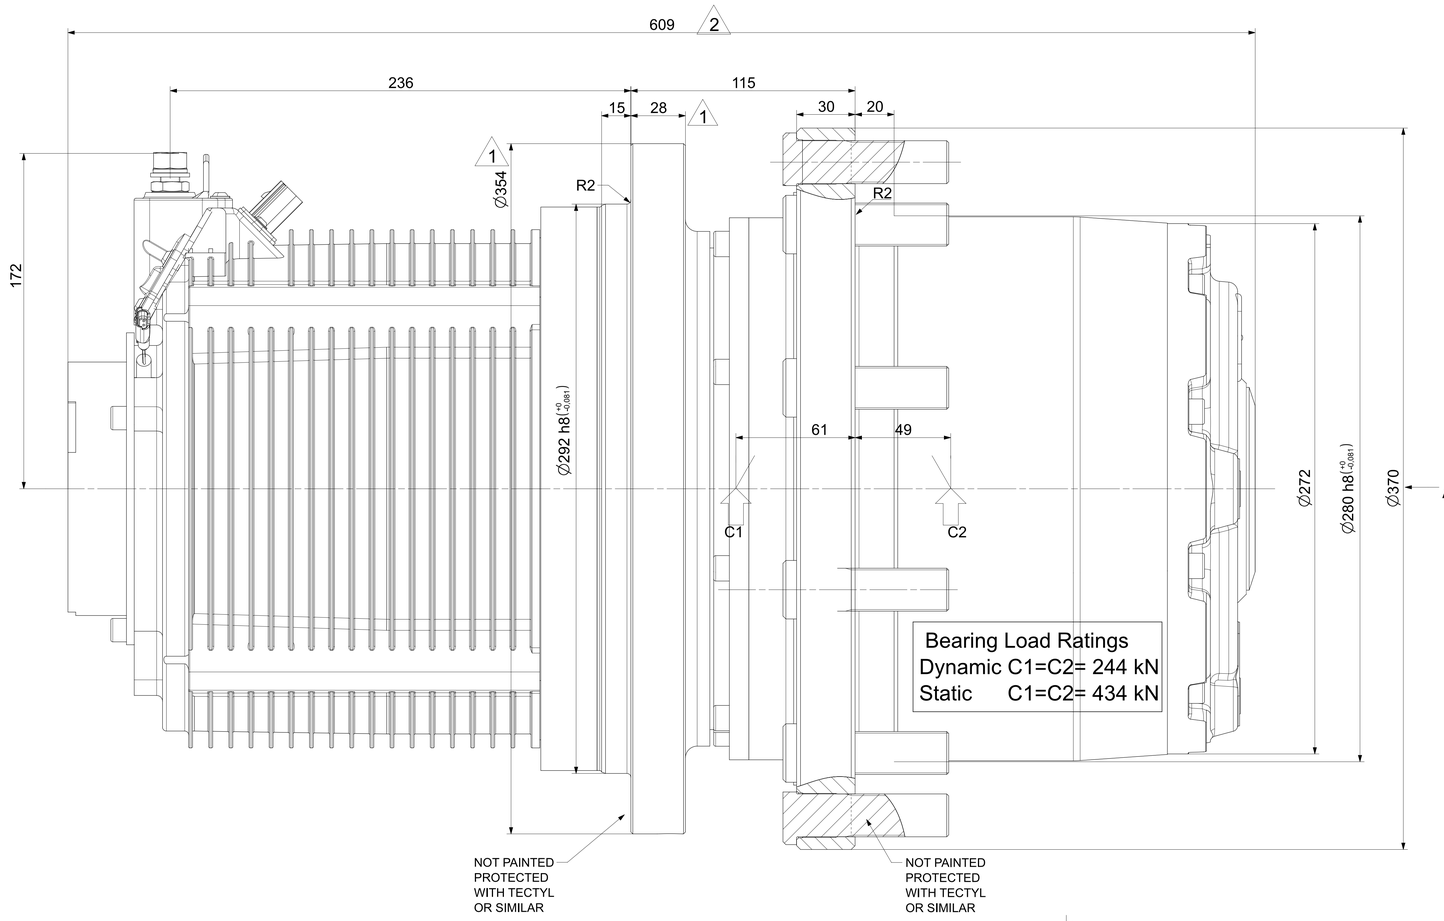

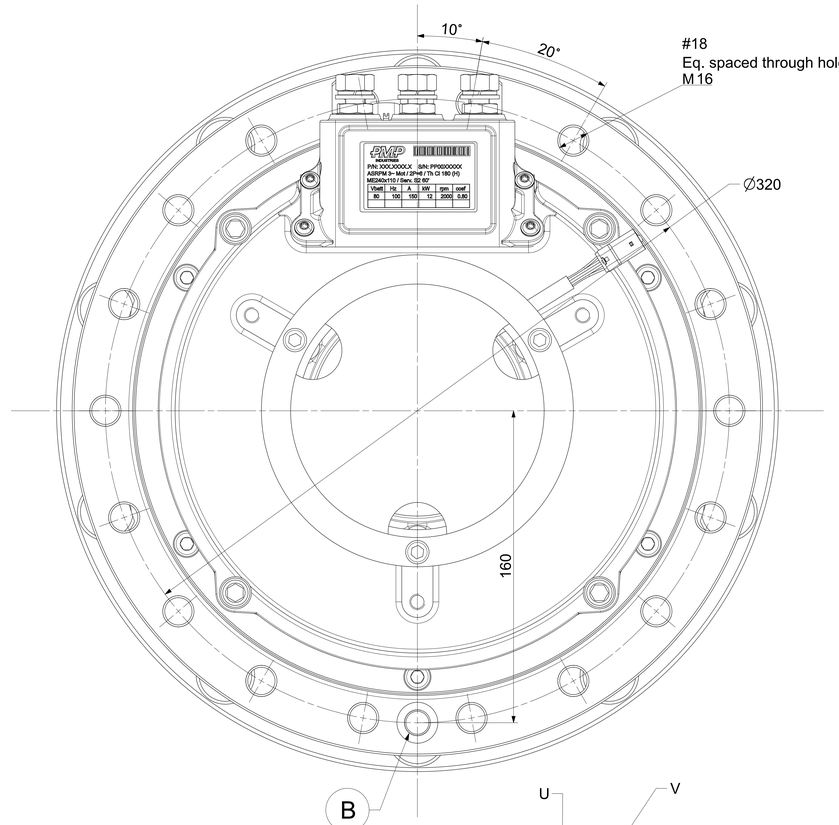

GEARBOX TECHNICAL DATA			
Maximum output torque		20000	Nm
Maximum input speed		3500	rpm
Reduction ratio		101,4	
Advised gearbox oil	(for temperate climate)	SAE80W90-APIGL5	
Gearbox oil quantity		2,5	l(+/-10%)
Motor-gearbox weight		180	kg(+/-5%)
Min. temperature of gearbox stopped or idle running		-40	°C
Min. running temperature of gearbox		-15	°C
BRAKE TECHNICAL DATA			
Coppia frenante		207 2	Nm (+/-10%)
Brake release pressure (complete disengage)		12	bar
Maximum brake working pressure		50	bar

PORT DESCRIPTION		
A	Front oil plugs	M14x1.5
B	Negative brake port	G1/4" 19TPI depth 13mm

ELECTRIC MOTOR TECHNICAL DATA (nominal parameters)		
	Power	10 kW
	Battery voltage	80V
	Duty cycle	S2-60 min
	Protection class	IP54
	Type	ASRPM

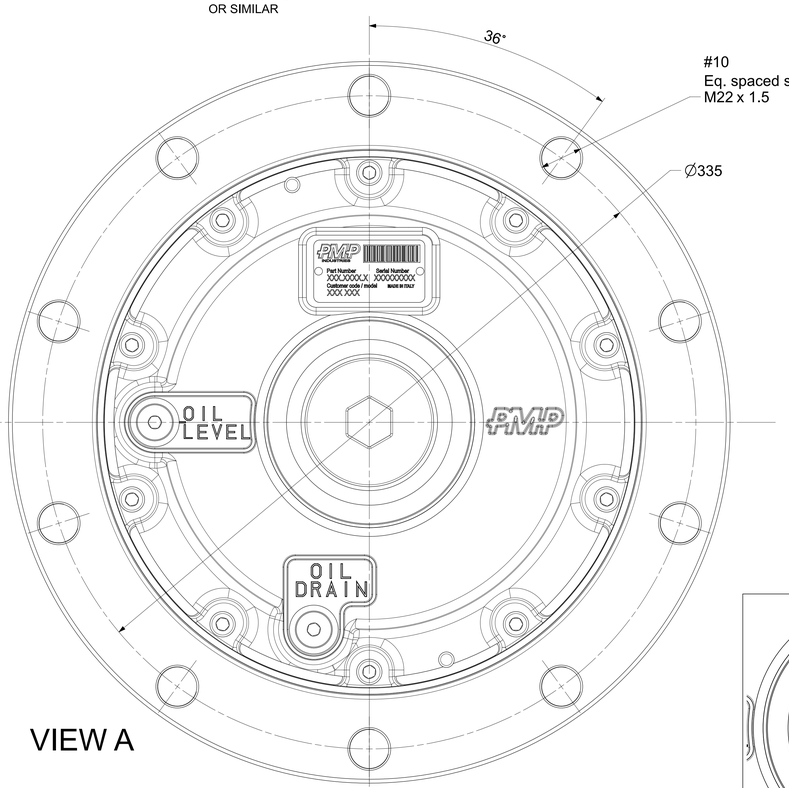

VIEW A

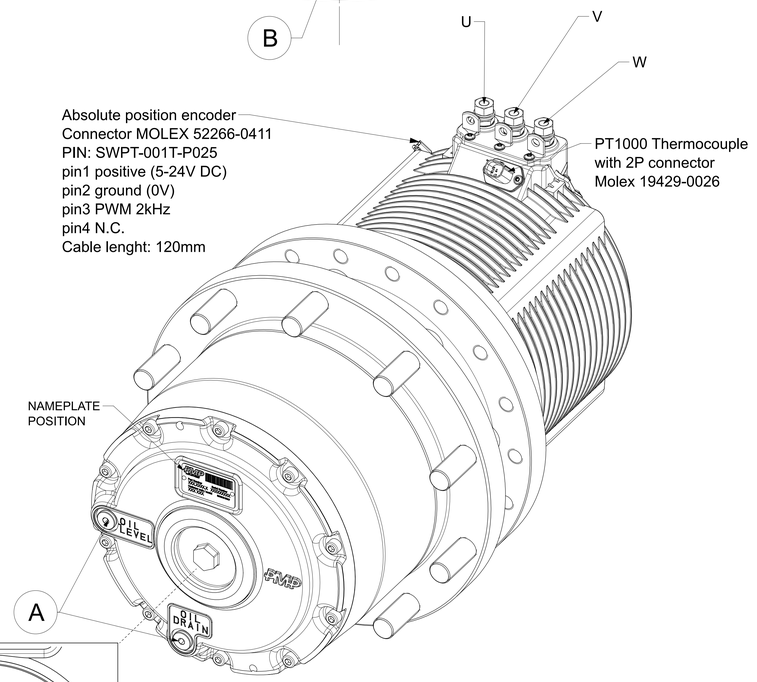



Gearbox Part Number	C20.1060.0
Service manual	PMC.M001
Spare Parts List	C20.1060.0EV
Painted Color	RAL 9005 black
Supplied filled with oil	NO

Revision	Revision Description	User	Date
2	Added protection cover, changed encoder connector, changed brake torque	EZ	13/12/21
1	modified dimensions, changed encoder connector	EZ	26/11/2021

PMP
THE APPLICATION SPECIALIST

Drawn by	Checked	Approved	Date
E. Zanzaro	RTT	RTT	

Description: PMC2000EL R101 ASRPM motor
Scale: 1:1
Ordering Code: PMC2000EL 100-240M-M-3-D-0-0-0-0-0-0
Mass - kg (+5%): 180
Drawing number: C20.1060.0
Doc.: E
Dwg Rev.: 2
Customer Part Number:

Sheet	of	Size	Date
1	1	A0	07/10/2021

PROPERTY OF THIS DRAWING IS PROTECTED ACCORDING TO THE LAW. IS FORBIDDEN TO REPRODUCE AND/OR DISCLOSE IT TO OTHER PARTIES WITHOUT OUR WRITTEN AUTHORIZATION