



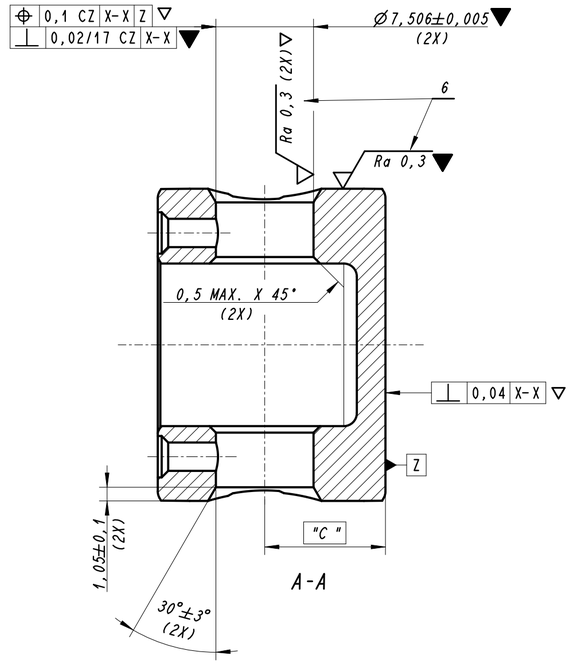

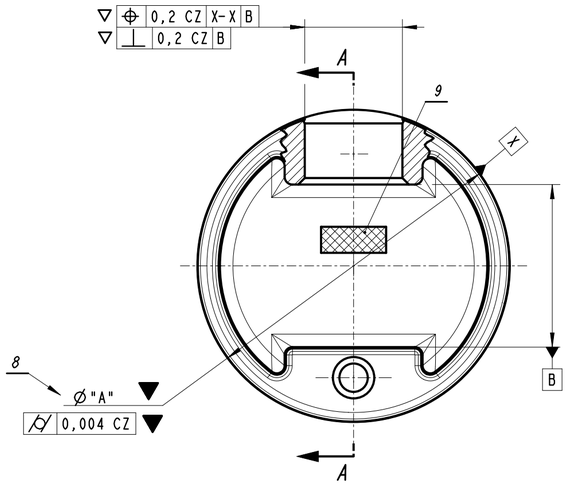

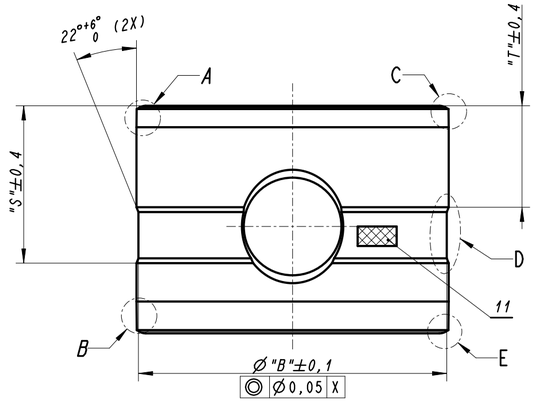









NOTES:
1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▽▼⊕, SEE TSS 002470.
3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 02420.⊕
4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369.▼
5 - MANGANIC PHOSPHATIZING ACCORDING TO DIN 50942. COATING THICKNESS = 0,0005mm A 0,0015mm.
6 - ROUGHNESS AND DIMENSIONS BEFORE SURFACE TREATMENT (PHOSPHATE).
7 - MEASUREMENT PROCEDURE OF CRITICAL DIMENSIONS: TSS 002601.
8 - ASSEMBLY REQUIREMENTS ACCORDING TO TSS 001559.
9 - IDENTIFICATION IN THIS AREA (MARK OR BLIND HOLE).
10 - DETAIL A / B ONLY VALID FOR MEXICO AND CHINA SITE.
11 - LASER ENGRAVING AREA.
12 - FOR PHOSPHATED PISTON 113341622(ONLY IN CN), ADDITIONAL BRUSHING PROCESS IS REQUIRED AFTER PHOSPHATING TO KEEP THE ROUGHNESS(Ra) WITHIN 0.3 µm, FREE OF SCRATCHES ON OUTSIDE CURVED SURFACE OF THE PISTON.
13 - DETAIL C / D / E ONLY VALID FOR AUSTRIA SITE

CODE	SITE	"A"	"B"	"C"	"S"	"T"	MATERIAL
113341992	CN / SK	26,0	25,7	11,98	13,1	7,8	13351298
113341630				11,28	12,1		
113341628	CN / SK / AT			10,78			113391628
113941259	CN / AT			9,78	9,1		113991259
113341622	CN / SK			9,78	10,1		13351298
113341620	CN / SK / AT	24,0	23,7	11,28	12,1	7,8	113391620
113341972	CN / SK			10,98			13351297
113341619				10,48			
113341978	CN			10,18			
113341621	CN / SK / AT			9,28			113391621
113941251	CN / AT			9,78	9,1	7,8	113991251
113941237	CN			9,28	9.1	6,4	13351529
113941186	CN			9,78		7,8	13351297
113341803	CN			8,78	12.1		
113340085	MX				10,1		
113941244	AT / CN	22,5	22,2	10,78	11,1	7,8	113991244
113941092	CN / AT						113991092
113941199	CN						
113941236	CN			10,28			13351528
113341618	MX / CN / SK			11,78	13,1	6,4	13351322
113341970	CN / SK			11,48			
113341660	CN / SK			11,28			
113341659	MX / SK			10,78			
113341819	CN / SK			9,78			
113340077	SK			9,28			
113340084	MX				11,7	7,8	
113341658	MX / SK	21,0	20,7	11,28	13,1	6,4	13351321
113941235	CN			10,48		7,8	
113341617	MX / CN / SK			10,28		6,4	113391617
113341804	CN / SK / AT			10,28		7,8	13351321
113341657	CN / SK / AT			9,78		6,4	113391657
113941197	CN						
113342168	CN			9,48			13351321
113340024	SK / CN			8,98			
113340030	MX /SK			9,28	11,7	7,8	
113341656	SK	19,0	18,7	12,48	13,1	6,4	13351320
113941102	CN			11,28			
113941090	CN / AT			11,78			
113941196	CN						
113341655	CN /SK			10,78			
113340075	SK			9,78			

SECTIONS FOR MEASURING THE DIAMETERS AND ROUNDNESS

Ø26	13,7	2,9	15,5
Ø24	13,7	2,3	15,5
Ø19, Ø21, Ø22,5	14,7	2,3	16,5
113941259	13,7	2,9	13,7
113941251	13,7	2,3	13,7
113941244	14,7	2,3	14,7
Ø "A"	"L"	"M"	"W"

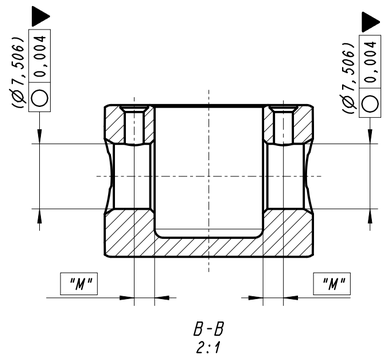

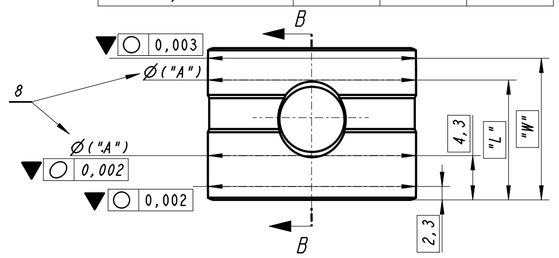

ECM	REVISION		BY	DATE
04141	16	UPDATED FORMAT REMOVED PT, SPA AND CN TRANSLATIONS	DS	-
		UPDATES IN TABLE, MAINLY IN FORMATS OFF STANDARD.		
CR07386	17	ADD CODE 113941102	TAB	NVG
		ADD NOTE 12		
		ADD CODE 113342168	TAB	
		ADD CN OR CODE 113340024	TAB	
CR12101	18	UPDATE 113341630, 113341642, 113341621 113341620, 113341628 'S MATERIAL	TAB	NVG
CR16337	19	ADD VIEW	CB	HC
		ADD NOTE 13		
		ADD SITE "AT" PISTON CODES	TAB	
CR24438	20	ADD CODE 113941186, 113341680 ADD "C" LIM. DELETE CODE 113341804 ADD SITE AT	TAB XQ TAB	XQ
		ADD PART 113941196 113941191, 113941199	TAB	XQ 2024.01.02
CR25392	21	ADD PART 113941237, 115941236, 113941235 113941233 T.R NVG 6.4	TAB	TYA
		ADD NEW CODE TO THE TABLE: 113941251 T.R NVG 6.4	TAB BS	MS 2025.OCT.15
		ADD NEW VIEW (113941244)		
CR27709	22	ADD 113941251/1239	TAB	XQ 2025.10.17
CR25392	23	UPDATED 3D MODEL	-	TYA -

MATERIAL :	SEE TABLE
CODE :	
DRAWN :	MAIKOL FEUSER
APP.:	MILTON LUNARDI
ECM :	19594
DATE :	2010.MAR.24

embraco Nidec

TITLE, DOCUMENT TYPE

PISTON

GEN. TOL. :	
ANG. TOL. :	
SCALE :	3:1
UNIT: mm	A2
REPLACE:	113341621 REV.15
No.	113341621
SHEET NUMBER:	1 OF 1

THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION