

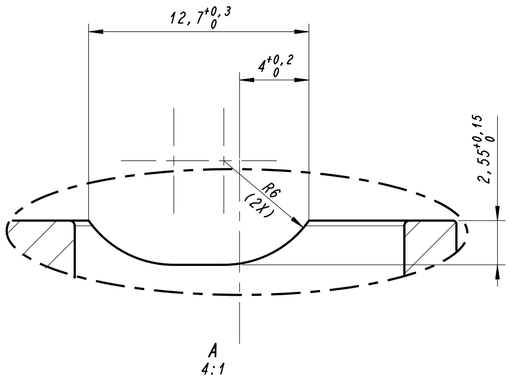



A
4:1

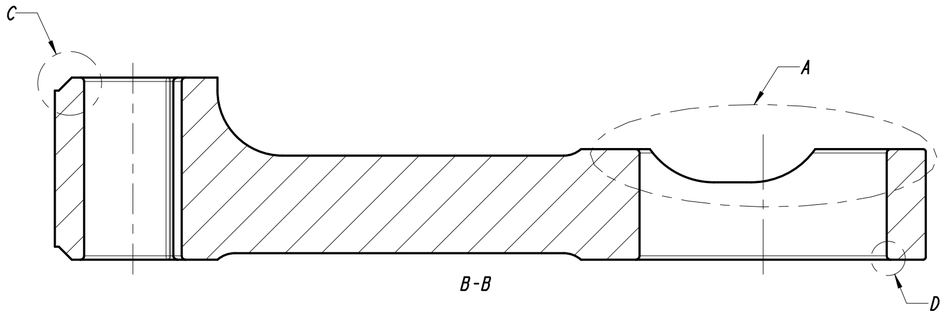


B-B




D
15:1

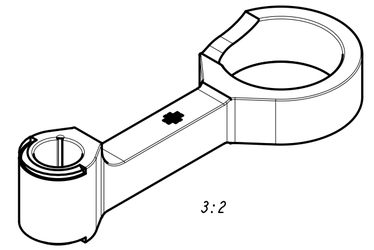


3:2

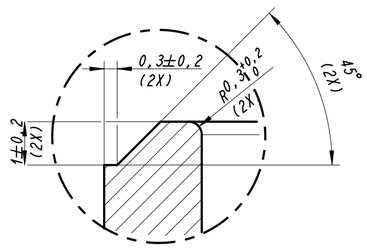


C
10:1

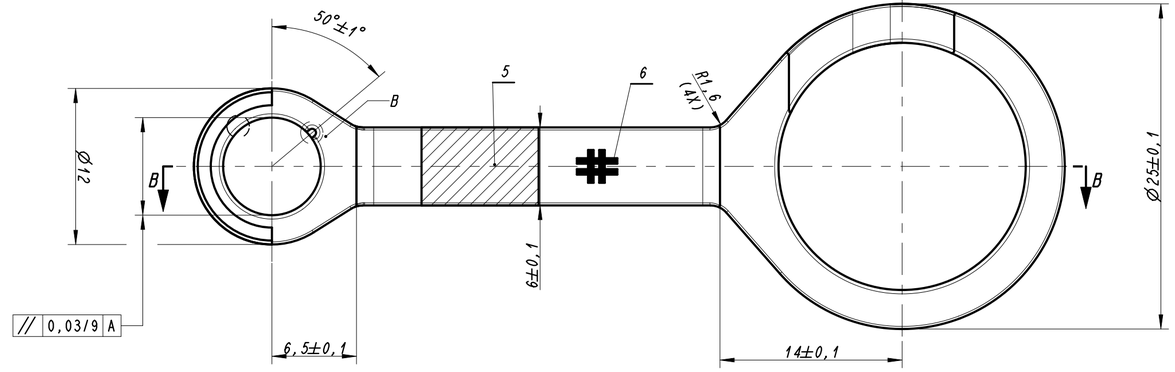

NOTES:
1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▽▼⊕, SEE TSS 002470.
3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420.⊕
4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369.▼
5 - SUPPLIER SYMBOL IDENTIFICATION.
6 - PART IDENTIFICATION "#" THIN LETTERING 4 mm, ACCORDING TO DIN 1451.
7 - GEOMETRIC REQUIREMENTS ACCORDING TO TSS 002611.
8 - DRAFT ANGLE 3° MAX.
9 - FREE SHAPE, FREE OF BURRS AND SHARP EDGES.
10 - STEAM TREATED Fe_3O_4. LAYER THICKNESS: 2,0 TO 5,0µm.
11 - EYES FINISHING: BRUSHING OR EQUIVALENT PROCESS.
12 - MEASURE THIS TOLERANCE IN THE COMPRESSION LOAD REGION.
13 - POSITION FOR MEASURING THE DIMENSION 0,6±0,1.
14 - MEASUREMENT PROCEDURE ACCORDING TO TSS 002531.
15 - DENSITY MEASUREMENT ACCORDING TO SOP 009185.
16 - SURFACE FREE OR CRACKS, CLUSTERS OF OPEN POROSITY AND DISCONTINUITIES THAT COMPROMISE THE STRUCTURAL STRENGTH. EVALUATION THROUGH FLEXTION TESTS ACCORDING TO SOP 037924. BENDING FORCE HIGHER THAN 30KGF FOR BIG EYE AND 20KGF FOR SMALL EYE.▽




B
20:1

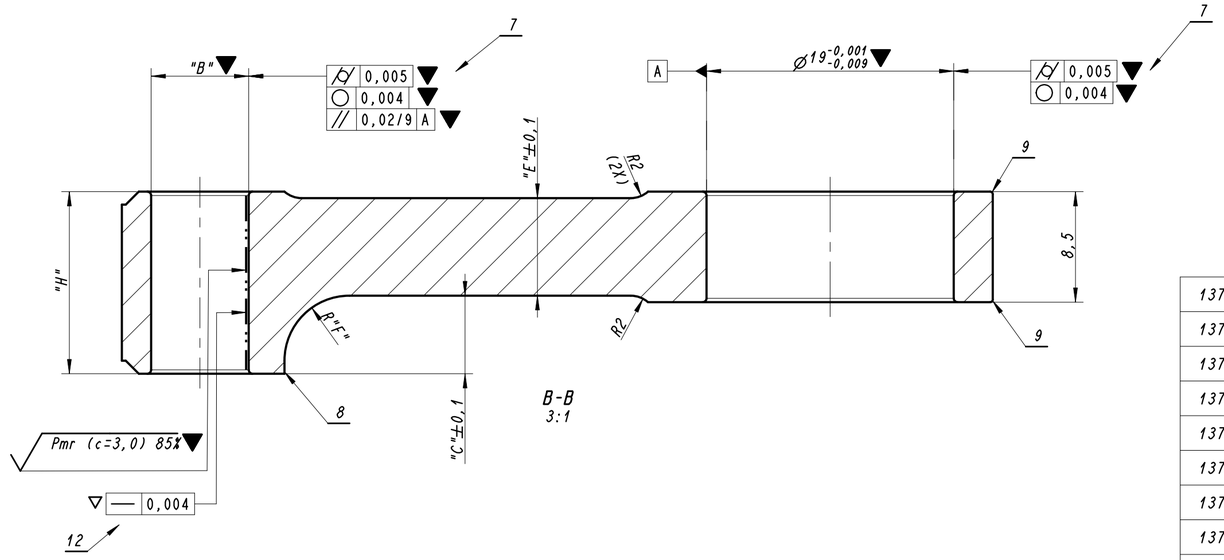

B-B
3:1

CODE	GROUP	"B"	"L"	"H"	"C"	"E"	"F"	#
13751683	2	7,5+0,010 +0,007	45,44	12	4,0	7,5	2	14
13751682	1	7,5+0,007 +0,004						
13751199	2	7,5+0,010 +0,007	45,44	10	3,0	6,5	2	13
13751198	1	7,5+0,007 +0,004						
13751197	2	7,5+0,010 +0,007	48,44	14	6,0	7,5	5	12
13751196	1	7,5+0,007 +0,004						
13751191	2	7,5+0,010 +0,007	48,44	12	4,0	7,5	2	11
13751190	1	7,5+0,007 +0,004						
13751189	2	7,5+0,010 +0,007	49,44	10	3,0	6,5	2	10
13751188	1	7,5+0,007 +0,004						

SECTIONS FOR ROUNDNESS AND CYLINDRICITY CONTROL

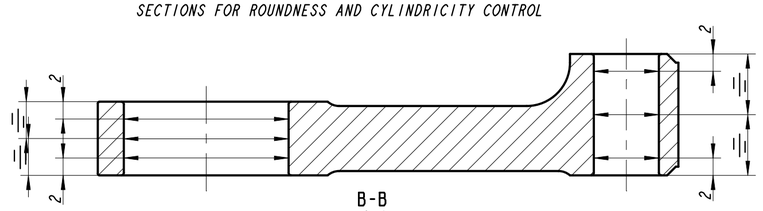

B-B
2:1

ECM	REVISION	LO	BY	DATE
	INCL. GENERAL ANG TOL. OF ±2°	A1	BHL	2026.JUL.13
A	INCL. NUMBER OF REPLACE DRAWING	A1		

MATERIAL :
Fe-C-Ni SINTERED ALLOY
C: 0,35% - 0,55%
Ni: 1,00% - 3,00%
DENSITY: 7,1±0,2 g/cm³

CODE :

DRAWN : GUILHERME DE SOUZA
APP.: DIEGO SACOMORI
ECM : CR33274 DATE : 2026.APR.29

embraco Nidec

TITLE, DOCUMENT TYPE
CONNECTING ROD

THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION

GEN. TOL. : ± 0,2
ANG. TOL. : ±2°
SCALE : 3:1
UNIT: mm A2
REPLACE: 1.325.1169 - REV. 4
No. 13751188
SHEET NUMBER: 1 OF 1