


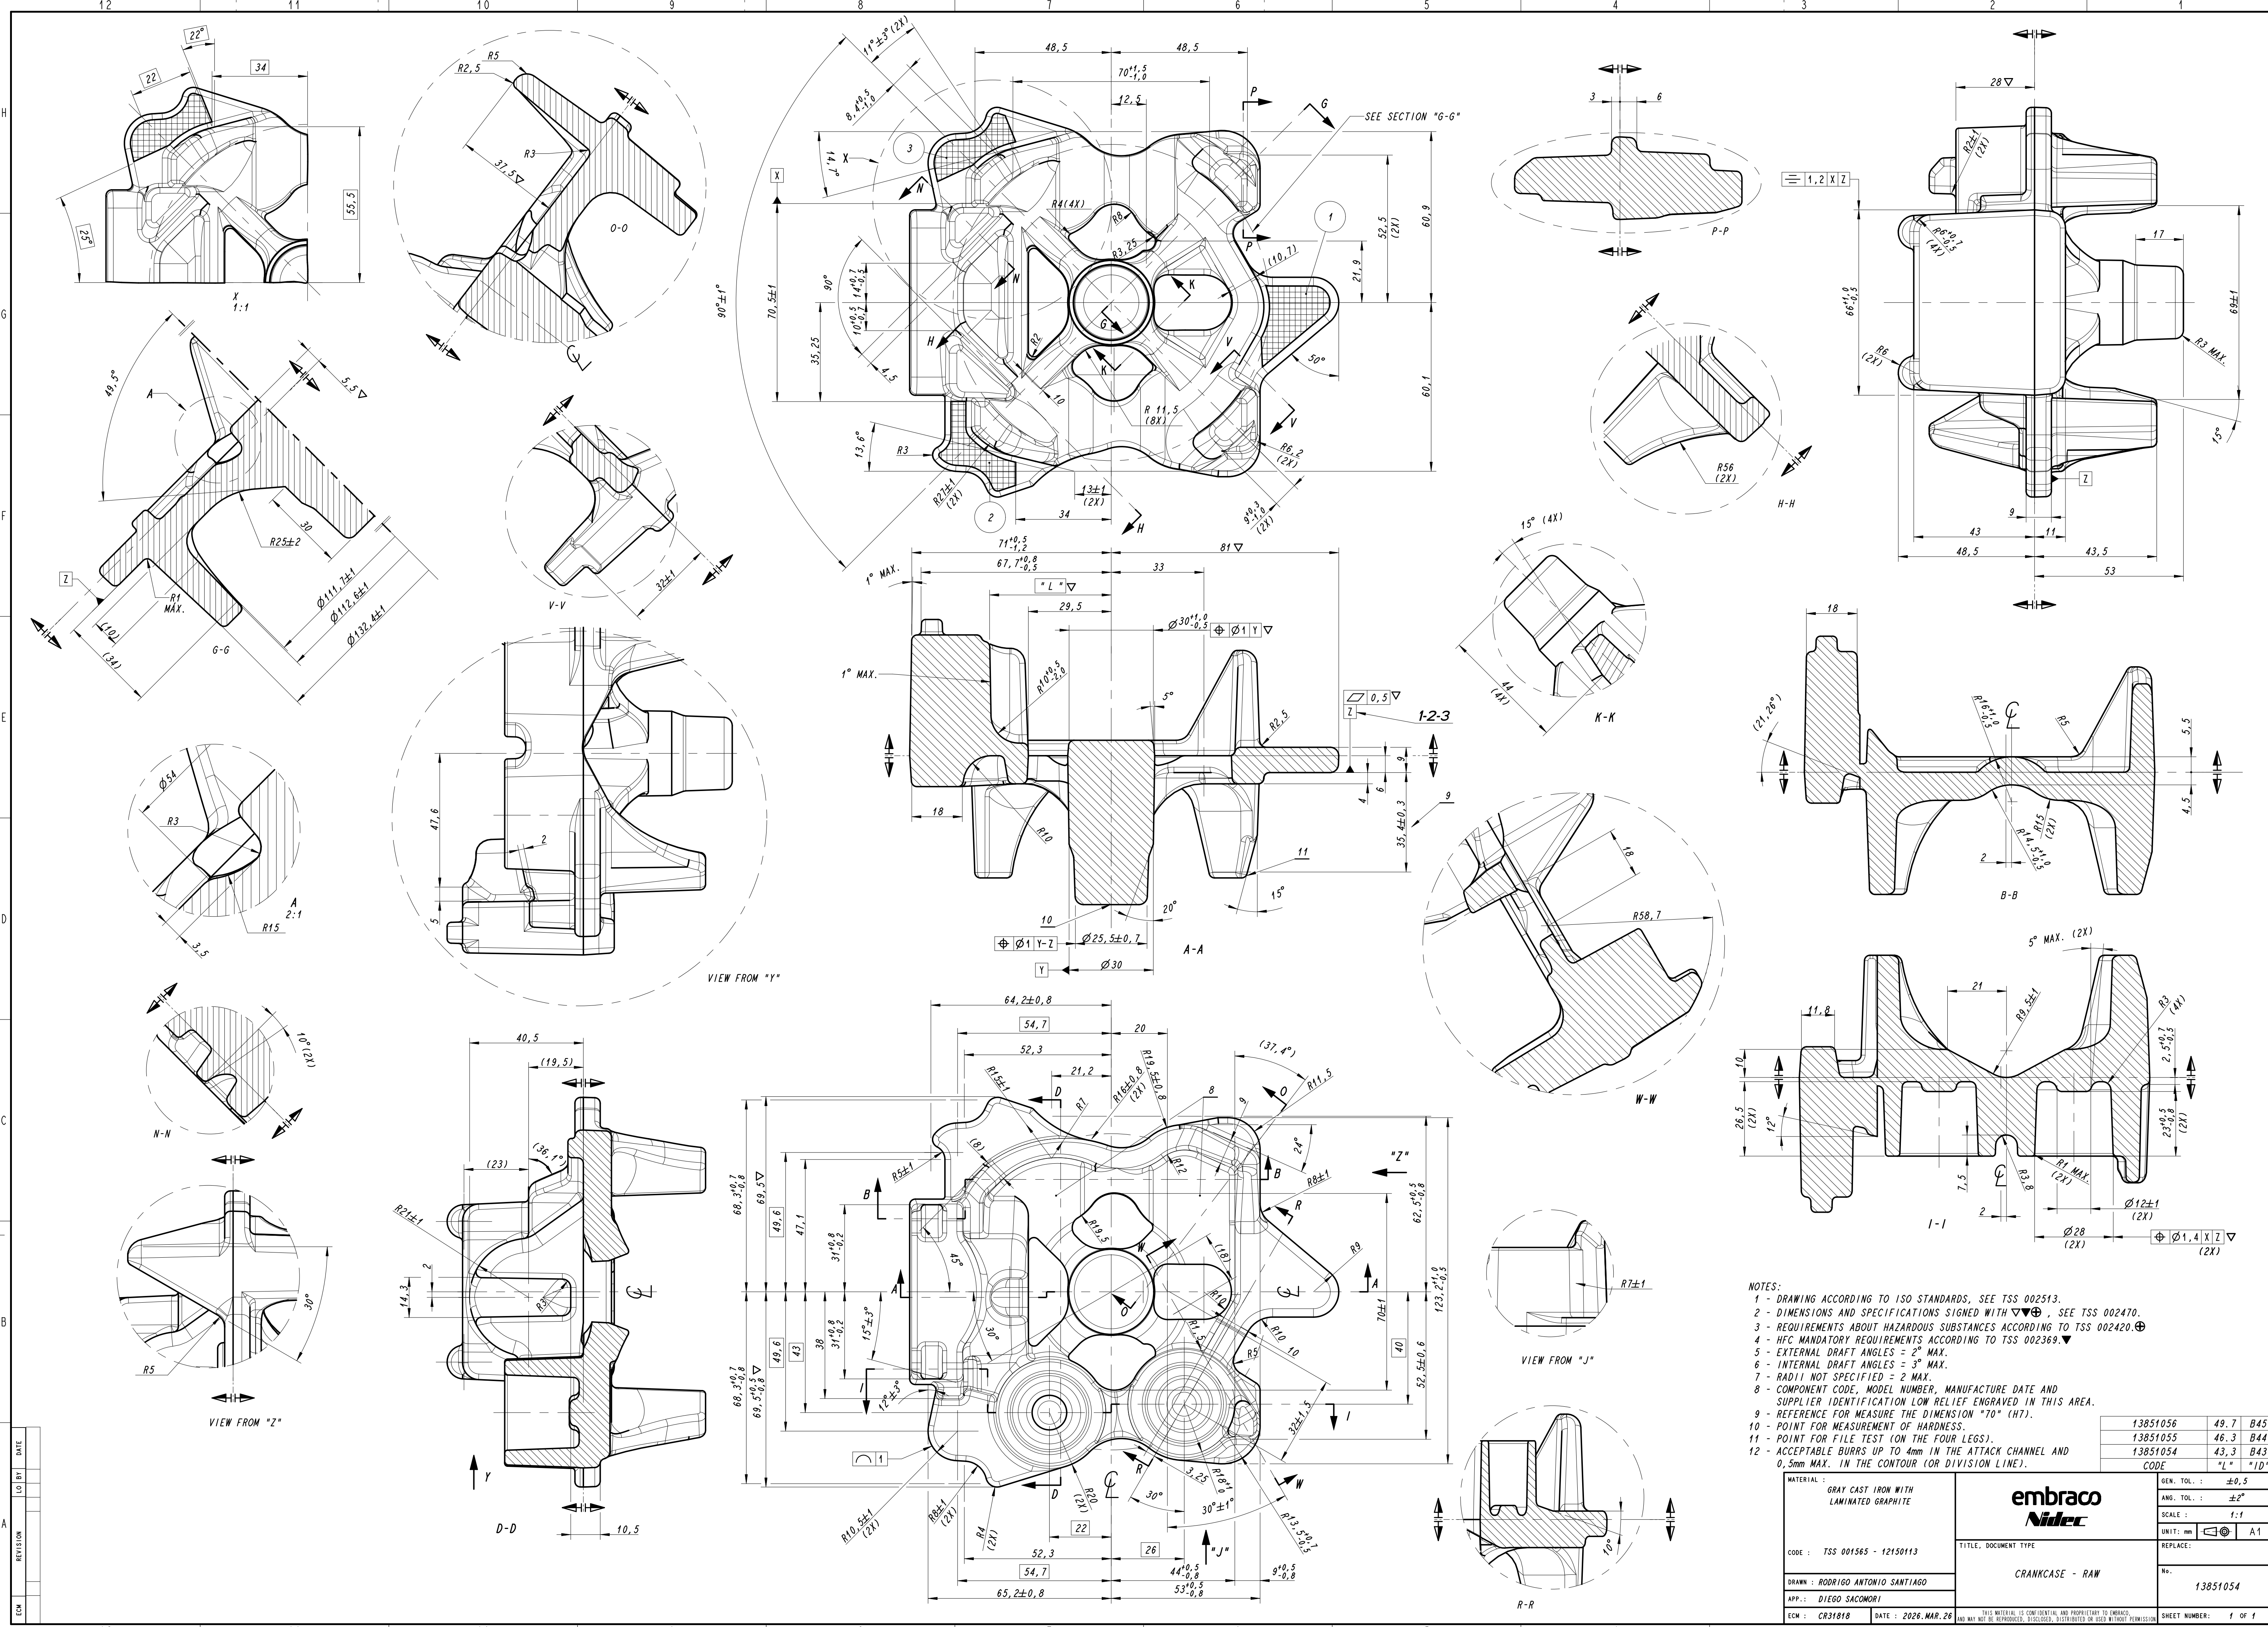

NOTES:

- DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
- DIMENSIONS AND SPECIFICATIONS SIGNED WITH ∇ AND $\oplus$, SEE TSS 002470.
- REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420.
- HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369.
- EXTERNAL DRAFT ANGLES = 2° MAX.
- INTERNAL DRAFT ANGLES = 3° MAX.
- RADII NOT SPECIFIED = 2 MAX.
- COMPONENT CODE, MODEL NUMBER, MANUFACTURE DATE AND SUPPLIER IDENTIFICATION LOW RELIEF ENGRAVED IN THIS AREA.
- REFERENCE FOR MEASURE THE DIMENSION "70" (H7).
- POINT FOR MEASURE OF HARDNESS.
- POINT FOR FILE TEST (ON THE FOUR LEGS).
- ACCEPTABLE BURRS UP TO 4mm IN THE ATTACK CHANNEL AND 0.5mm MAX. IN THE CONTOUR (OR DIVISION LINE).

CODE	*L*	*10*
13851056	49.7	B45
13851055	46.3	B44
13851054	43.3	B43

GEN. TOL. :	±0.5
ANG. TOL. :	±2°
SCALE :	1:1
UNIT: mm	A1
REPLACE:	
No.	13851054
SHEET NUMBER:	1 OF 1

MATERIAL :	GRAY CAST IRON WITH LAMINATED GRAPHITE
CODE :	TSS 001565 - 12150113
DRAWN :	RODRIGO ANTONIO SANTIAGO
APP.:	DIEGO SACOMORI
ECM :	CR31018
DATE :	2026.MAR.28

TITLE, DOCUMENT TYPE

CRANKCASE - RAW

THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO. IT MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION.