

Revisions			
Rev.	Date	Author	Description


Notes

Bill of Materials				
Id	Type	Manufacturer	Part Number	Quantity
9	Wire		M22759/32-20-2	193 in
17	Wire		20 AWG Red	47 in
18	Wire		20 AWG Black	47 in
19	Wire		20 AWG Yellow	120 in
20	Wire		M22759/32-20-3	141 in
21	Connector	TE Connectivity	DTM04-12PA	1
24	Connector	TE Connectivity	DT06-08SA	1
25	Connector	TE Connectivity	DT06-4S	1

From	To	Conductor	Color	Size	From Contact PN
(Main Connector).1	8-PIN MX150 (Dash).1	LED Hot.Black		20 AWG	
(Main Connector).4	8-PIN MX150 (Dash).5	Starter A.Red		20 AWG	
(Main Connector).5	8-PIN MX150 (Dash).2	Neutral Indicator.Orange		20 AWG	
(Main Connector).6	8-PIN MX150 (Dash).3	Oil Pressure Warning.Orange		20 AWG	
(Main Connector).7	8-PIN MX150 (Dash).6	Starter B.Red		20 AWG	
(Main Connector).8	8-PIN MX150 (Dash).4	Engine Temp Warning.Orange		20 AWG	
(Main Connector).9	4-PIN MX150 (Brake Switch-Box).2	Inertia and Brake OT B.Yellow		20 AWG	
(Main Connector).10	4-PIN MX150 (Brake Switch-Box).3	Brake Light Switch Pwr.Red		20 AWG	
(Main Connector).11	4-PIN MX150 (Brake Switch-Box).4	Brake Light Switch Return.Red		20 AWG	
(Main Connector).12	8-PIN MX150 (Dash).7	Ignition A.Yellow		20 AWG	

From	To	Conductor	Color	Size	From Contact PN
8-PIN MX150 (Dash).1	(Main Connector).1	LED Hot.Black		20 AWG	
8-PIN MX150 (Dash).2	(Main Connector).5	Neutral Indicator.Orange		20 AWG	
8-PIN MX150 (Dash).3	(Main Connector).6	Oil Pressure Warning.Orange		20 AWG	
8-PIN MX150 (Dash).4	(Main Connector).8	Engine Temp Warning.Orange		20 AWG	
8-PIN MX150 (Dash).5	(Main Connector).4	Starter A.Red		20 AWG	
8-PIN MX150 (Dash).6	(Main Connector).7	Starter B.Red		20 AWG	
8-PIN MX150 (Dash).7	(Main Connector).12	Ignition A.Yellow		20 AWG	

From	To	Conductor	Color	Size	From Contact PN
4-PIN MX150 (Brake Switch-Box).2	(Main Connector).9	Inertia and Brake OT B.Yellow		20 AWG	
4-PIN MX150 (Brake Switch-Box).3	(Main Connector).10	Brake Light Switch Pwr.Red		20 AWG	
4-PIN MX150 (Brake Switch-Box).4	(Main Connector).11	Brake Light Switch Return.Red		20 AWG	

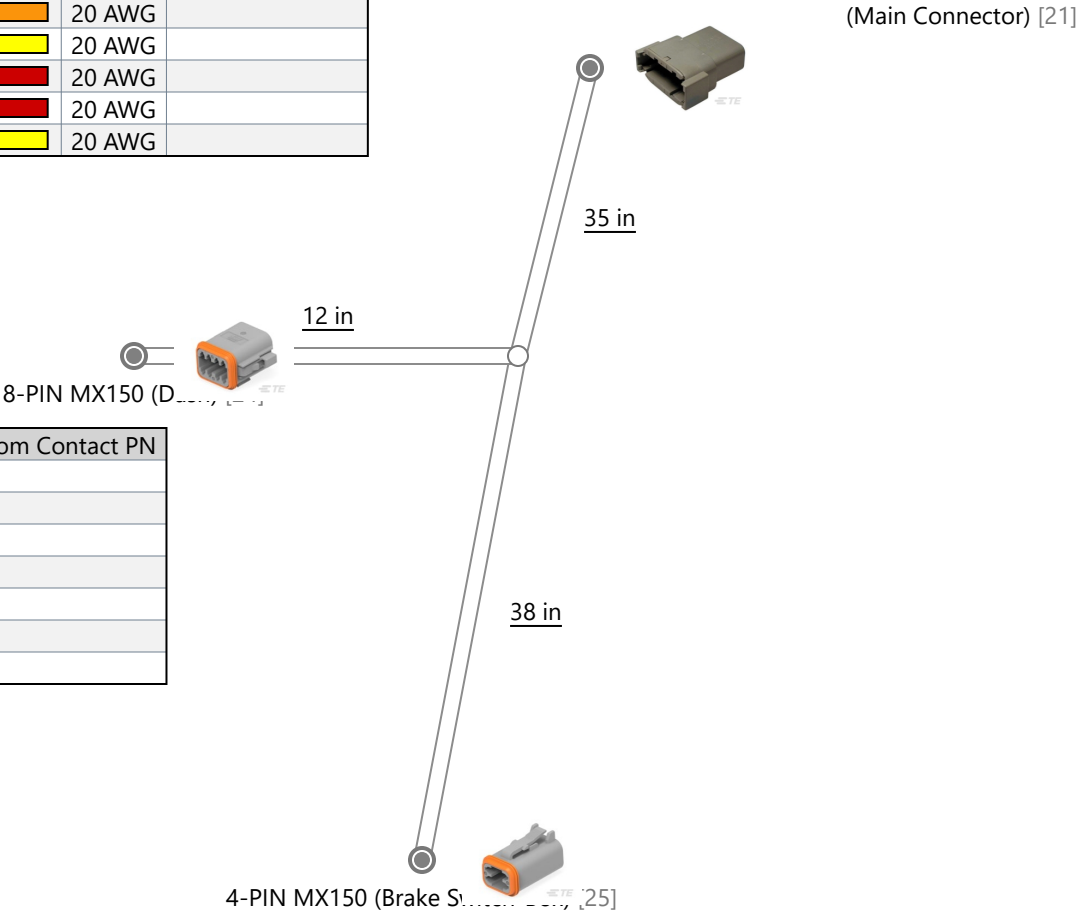

Title	----	Part Number	Front Harness
Description			

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----



This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.

Title:	----
Part Number:	Front Harness
Description:	



Rev.	Date	Author	Description

Title:	----
Part Number:	Front Harness
Description:	



Flag	Quantity	Note

Title:	----
Part Number:	Front Harness
Description:	

Id	Type	Manufacturer	Part Number	Description	Quantity	Usage
9	Wire		M22759/32-20-2	M22759 20 AWG Red Tin Plated Copper wire	193 in	Brake Light Switch Pwr, Brake Light Switch Return, Starter A
17	Wire		20 AWG Red	Generic Wire	47 in	Starter B
18	Wire		20 AWG Black	Generic Wire	47 in	LED Hot
19	Wire		20 AWG Yellow	Generic Wire	120 in	Ignition A, Ignition B, Inertia and Brake OT A, Inertia and Brake OT B
20	Wire		M22759/32-20-3	M22759 20 AWG Orange Tin Plated Copper wire	141 in	Engine Temp Warning, Neutral Indicator, Oil Pressure Warning
21	Connector	TE Connectivity	DTM04-12PA	TE Connectivity DTM 04-12 PA Connector: Housing, Contacts, Fuse Wedge	1	(Main Connector)
24	Connector	TE Connectivity	DT06-08SA	Automotive Connector Housing, IP68, DT, Plug, 8 Ways, DT Series Socket Contacts, Thermoplastic Body	1	8-PIN MX150 (Dash)
25	Connector	TE Connectivity	DT06-4S	DEUTSCH DT Series 4 Position Dual Row Female Socket Free Hanging Plug Housing	1	4-PIN MX150 (Brake Switch-Box)

Title:	----
Part Number:	Front Harness
Description:	

From	To	Conductor	Conductor PN	Twisted With	Size	Length	From Contact PN	Notes
(Main Connector).1	8-PIN MX150 (Dash).1	 LED Hot.Black	20 AWG Black		20 AWG	47 in		
(Main Connector).4	8-PIN MX150 (Dash).5	 Starter A.Red	M22759/32-20-2		20 AWG	47 in		
(Main Connector).5	8-PIN MX150 (Dash).2	 Neutral Indicator.Orange	M22759/32-20-3		20 AWG	47 in		
(Main Connector).6	8-PIN MX150 (Dash).3	 Oil Pressure Warning.Orange	M22759/32-20-3		20 AWG	47 in		
(Main Connector).7	8-PIN MX150 (Dash).6	 Starter B.Red	20 AWG Red		20 AWG	47 in		
(Main Connector).8	8-PIN MX150 (Dash).4	 Engine Temp Warning.Orange	M22759/32-20-3		20 AWG	47 in		
(Main Connector).9	4-PIN MX150 (Brake Switch-Box).2	 Inertia and Brake OT B.Yellow	20 AWG Yellow		20 AWG	73 in		
(Main Connector).10	4-PIN MX150 (Brake Switch-Box).3	 Brake Light Switch Pwr.Red	M22759/32-20-2		20 AWG	73 in		
(Main Connector).11	4-PIN MX150 (Brake Switch-Box).4	 Brake Light Switch Return.Red	M22759/32-20-2		20 AWG	73 in		
(Main Connector).12	8-PIN MX150 (Dash).7	 Ignition A.Yellow	20 AWG Yellow		20 AWG	47 in		

Title:	----
Part Number:	Front Harness
Description:	

#	Type	Reference Designator	Manufacturer	Part Number	Color	Size	From Strip	To Strip	Length	Twisted With	Notes
1	Wire	Brake Light Switch Pwr		M22759/32-20-2	 Red	20 AWG			73 in		
2	Wire	Brake Light Switch Return		M22759/32-20-2	 Red	20 AWG			73 in		
3	Wire	Engine Temp Warning		M22759/32-20-3	 Orange	20 AWG			47 in		
4	Wire	Ignition A		20 AWG Yellow	 Yellow	20 AWG			47 in		
5	Wire	Inertia and Brake OT B		20 AWG Yellow	 Yellow	20 AWG			73 in		
6	Wire	LED Hot		20 AWG Black	 Black	20 AWG			47 in		
7	Wire	Neutral Indicator		M22759/32-20-3	 Orange	20 AWG			47 in		
8	Wire	Oil Pressure Warning		M22759/32-20-3	 Orange	20 AWG			47 in		
9	Wire	Starter A		M22759/32-20-2	 Red	20 AWG			47 in		
10	Wire	Starter B		20 AWG Red	 Red	20 AWG			47 in		

Title:	----
Part Number:	Front Harness
Description:	



#	Manufacturer	Part Number	Description	Label Text