

ROTARY HYDRO-X

Rotary Hydro Excavation Tools

Hydro Excavation is a safe alternative to access buried utilities by potholing or trenching with high pressure water.

Three options available for different applications:

- HXR 300-10: Higher flow for harder surfaces
- HXR 300-8: Intermediate flow for general use
- HXR 300-5: Lower flow for water savings

FEATURES:

- Angled rotating jet pattern reduces undercutting and safely cleans around utilities
- · Carbide seat for long nozzle life
- Fully rebuildable tool
 - o Inexpensive rebuild kits reduce cost of ownership by extending the life of the tool with minimal maintenance
 - o Replaceable shield cap

HXR-300

Up to 5k psi (350 bar)

3–15 gpm Flows (9–58 l/min)

3 Flow Ranges Available

Specifications

PRESSURE RANGE	Up to 5k psi 340 bar
FLOW RANGE	Up to 15 gpm 9-58 l/min
CONE SPRAY ANGLE	18°
INLET CONNECTION	0.5-14 NPT
WEIGHT	1.1 lb 0.5 kg
DIAMETER	1.75 in. 44 mm
LENGTH	4.2 in. 107 mm



1-866-795-1586 · WWW.STONEAGETOOLS.COM

HYDRO EXCAVATION




ANGLED ROTATING JET PATTERN

Outstanding jet quality minimizes undercutting and safely removes material around utilities



Allows the HXR-300 to be serviced quickly and inexpensively

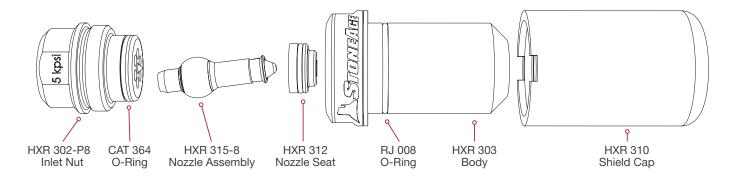

Maintenance & Overhaul Kits =

INTERNAL PARTS -

HXR 610-10 • SERVICE KIT

(1) CAT 364 0-Rina (1) HXR 306-10 ID Ring, White

(1) HXR 312 Nozzle. Seat

Nozzle, Stem (1) HXR 315-10

HXR 610-8 • SERVICE KIT

(1) CAT 364 0-Rina

(1) HXR 306-8 ID Ring, Black (1) HXR 312 Nozzle, Seat

Nozzle, Stem (1) HXR 315-8

HXR 610-5 • SERVICE KIT

(1) CAT 364 0-Rina

(1) HXR 306-5 ID Ring, Purple

(1) HXR 312 Nozzle, Seat

(1) HXR 315-5 Nozzle, Stem

EXTERNAL PARTS

HXR 615-10 • SERVICE KIT

(1) HXR 310 Shield, Yellow (1) HXR 306-10 ID Ring, White

(1) RJ 008 0-Ring

HXR 615-8 • SERVICE KIT

(1) HXR 310 Shield, Yellow (1) HXR 306-8 ID Ring, Black

(1) RJ 008 0-Ring

HXR 615-5 • SERVICE KIT

(1) HXR 310 Shield, Yellow (1) HXR 306-5 ID Ring, White (1) RJ 008 0-Rina