AUTOBOX PRODRIVE

Hands-Free Hose Feed for Pipe Cleaning



OVERVIEW

The AutoBox ProDrive is a hose feed device engineered to quickly and safely clean a broad range of pipes with or without a flange. The system is lightweight, portable, and highly adaptable, making it the perfect tool for limited access applications.

The ProDrive is designed with multiple mounting options allowing it to be used with a wide variety of pipe sizes and configurations. The system also includes a lightweight control box for increased safety and mobility.

FEATURES	BENEFITS
Ultra portable system design	 At 25 lbs (11 kg), the ProDrive is ideal for limited access applications
Interchangeable rollers	 Accommodates multiple hose sizes A single system can handle a wide range of tube/pipe cleaning applications Less equipment to buy
Adjustable forward and reverse feed rate to customize dwell time	Consistent controllable cleaning in both directionsBetter results in less time
Multiple mounting options for pipes with or without a flange	Quick set-up in a variety of application environmentsBid on more types of jobs
Ergonomic control box	Operate all features from outside the blast zone for safety and better line of sight
Built in back-out preventer and splash guard	Increases job site safety
Optional snout	Enables quick, easy setup for challenging or unique applications



AUTOBOX PRODRIVE OVERVIEW

ADDITIONAL INFORMATION

The AutoBox ProDrive is well suited for Banshee Beetle and 2" Badger tools.


TOOL SPECIFICATIONS

MODEL	ABX-PRO		
Pipe Size	Recommended: 2–8 in. 51–203 mm		
Feed Rate	0.2-2.5 ft/sec 61-762 mm/sec		
Hose Size	3/2-8/4, 3/8 Rubber Covered		
Dimensions	7 in. x 9.25 in. x 10 in. 178 mm x 235 mm x 254 mm		
Weight	25 lbs 11.3 kg		

Visit the StoneAge Dealer Portal for more tool sales and marketing resources:

DEALER.STONEAGETOOLS.COM

AUTOBOX PRODRIVE CONFIGURATION

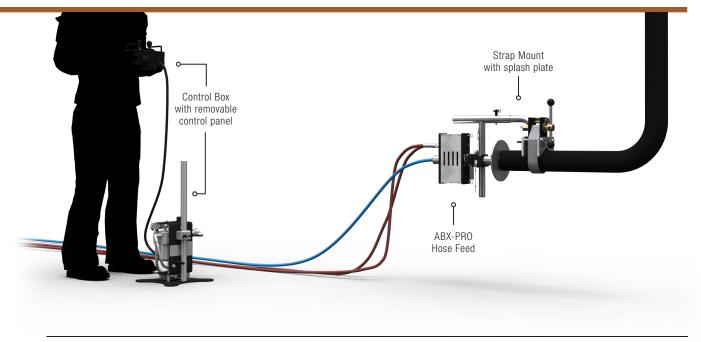

A complete AutoBox ProDrive configuration requires the following components:

- 1. ABX-PRO hose feed tractor with collet block and rollers
- 2. Hose stop collet of appropriate size
- 3. Flange mounting plate or strap mount assembly
- 4. Control box

The following items may also be requested:

- Additional rollers/collets for different hose sizes
- Snout or snout tube
- Splash plate

To configure an AutoBox ProDrive, the following information should be obtained:

- What size pipe are you cleaning?
- What size hose/collet will be used?
- Will you mount the system to a pipe flange or use a strap mount?
- Will you require a tube or snout to connect to the pipe?
- Will you require a splash plate?



AUTOBOX PRODRIVE CONFIGURATION

ORDERING THE BASE PACKAGE

StoneAge offers a preconfigured base package for the AutoBox ProDrive that can be ordered in a single Part ID. The following table shows the configuration of the base package:

PACKAGE PART ID	PACKAGE CONTENTS		
ABX-PRO-100-PKG	1 x ABX-PR0-100 Hose feed system assembly		
	1 x ABX-PRO Hose feed tractor		
	1 x PRO 174-46 0.46" Rollers, set of 2 (installed)		
	1 x BOP 030 Collet block assembly		
	1 x BOP 081-6 Snout Tube, 6" straight unthreaded		
	1 x BOP 010-2-4-QTR Flange Mount Plate Assembly, 2-4" Pipes		
	1 x BOP 050 Strap mount assembly		
	1 x FF 121- XXX* Hose stop collet (Specify hose size for full part ID)		
	1 x PRO 174-34 0.34" Rollers, set of 2		
	1 x CB-ABX-PRO-100-P Control box, Pedestal		

Hose Stop Collet Kit

We also offer a collet kit that includes all hose stop collets for the roller sizes included in the base package.

COLLET KIT PART ID	ROLLER Ø	HOSE OD	COLLET PART ID
PRO 621	0.34 in.	0.26-0.38 in.	FF 121-297
			FF 121-328
			FF 121-406
	0.46 in.	0.39-0.50 in.	FF 121-438
			FF 121-460
			FF 121-484
			FF 121-516

Additional Roller and Collet Sizes

ROLLER	HOSE OD	SPIRSTAR	PARKER	COLLET
PRO 174-34 Ø 0.34 in.	0.26–0.38 in.	3/2	2240D-02	FF 121-297
		3/4, 4/2	2240D-025, 2440D-02	FF 121-328
		3/6, 5/2	2240D-03	FF 121-406
PRO 174-46 Ø 0.46 in.	0.39–0.50 in.	4/4	2448D-025	FF 121-438
		4/6, 5/4, 6/2	2240D-04	FF 121-460
			2640D-025, 2740D-03	FF 121-484
		6/4	2440D-04	FF 121-516
PR0 174-58 Ø 0.58 in. 0.51–0.61 in.		5/6, 8/2	2240D-05, 2740D-03	FF 121-547
	0.51–0.61 in.	8/4		FF 121-594
			2440D-05	FF 121-625
PRO 174-89 Ø 0.89 in.	0.80-0.93 in.	3/8" Rubber WB Hose		N/A