



AMTEC

AGRICULTURAL MACHINERY TESTING AND EVALUATION CENTER



Test Discontinuity Report No. 2026 – 0007



Agricultural Machinery – Internal Combustion Engine PLATINUM PT18

Agricultural Machinery	Internal Combustion Engine
Type	Four-stroke cycle, Air-cooled, Single inclined cylinder, Gasoline engine
Brand	PLATINUM
Model	PT18
Serial Number	230225817
Date of Issued	March 13, 2026
Test Location	Roberto C. Bautista Hall, UPLB, College, Los Baños, Laguna
Items Tested	Maximum Power Test
Test Requested by	ALL CERTIFIED EQUIPMENT TRADING CORPORATION 905 EDSA, Brgy. Phil-Am, Quezon City

Summary of Incident

Dated of Incident	March 12, 2026
Time of Incident	2:00 p.m.
Type of Incident	Machine Breakdown
Description of Incident	During the conduct of the maximum power test, the engine was operated following the standard testing procedure to obtain the required measurements. At the start of the data recording phase, while the engine was running under maximum load conditions, a sudden mechanical failure occurred within the engine assembly. It was observed that the engine shaft had snapped (Figure 1.), which immediately disrupted the transmission of rotational power and prevented the continuation of the test. Due to this unexpected failure, the testing procedure was stopped to avoid further damage to the equipment.

SUMMARY

Performance Criteria	Requirement as per PNS/BAFS 396:2024	AMTEC Test
Maximum Power as Percentage of Rated Maximum Power, %, minimum	80	NM ^a
Average specific fuel consumption during the continuous running test, g/kWh, maximum	350	NM ^b
Rated maximum power at rated speed, kW	13.43 kW at 3600 rpm ^c	NM ^d
Rated continuous power at rated speed, kW	10.74 kW at 3600 rpm ^c	NM ^b
No major breakdowns/ malfunctions during the test	None	The engine shaft snapped at the start of maximum power test

^a Varying load test was not conducted.

^b Continuous running test was not conducted.

^c Based on the nameplate provided by the test applicant.

^d Maximum power test was not conducted.

Note: NM – Not Measured

SPECIFICATIONS

Item		Manufacturer's Specification ^a	AMTEC Verification
1	Overall dimensions and weight		
1.1	Length, mm	ND	500
1.2	Width, mm	ND	410
1.3	Height, mm	ND	450
1.4	Weight, kg	33	35.6 ^b
2	Fuel ignition system	ND	Spark
3	Fuel system		
3.1	Type of fuel used	Gasoline	Gasoline
3.2	Type of fuel feed	ND	Gravity
3.3	Tank capacity, L	6.5	6.5 ^a
4	Cooling Method	Air-cooled	Air-cooled
5	Cylinder arrangement	Inclined	Inclined
6	Valves and camshaft arrangement	ND	Overhead
7	No. of combustion cycles	4-cycle	Four
8	No. of cylinder	One	One
9	Cylinder dimensions		
9.1	Bore, mm	90	90 ^a
9.2	Stroke, mm	69	69 ^a
10	Displacement volume, cm ³	458	458 ^a
11	Maximum brake power at rpm, kW	13.43kW at 3600 rpm	NM ^d
12	Continuous brake power at rpm, kW	10.74kW at 3600 rpm	NM ^d
13	Lubrication System	ND	ND ^c
14	Starting system	ND	Rope recoil starter
15	Governor system	ND	ND ^c
16	Air cleaner	ND	Oil bath type
17	Safety features	ND	Muffler
18	Other attachments/accessories	ND	Key starter

^a The data were obtained from the components nameplate and operator's manual provided by the test applicant.

^b Weight includes engine oil.

^c The engine was not disassembled

^d The maximum power and continuous running test was not conducted

Note: ND – No Data, NM – Not Measured

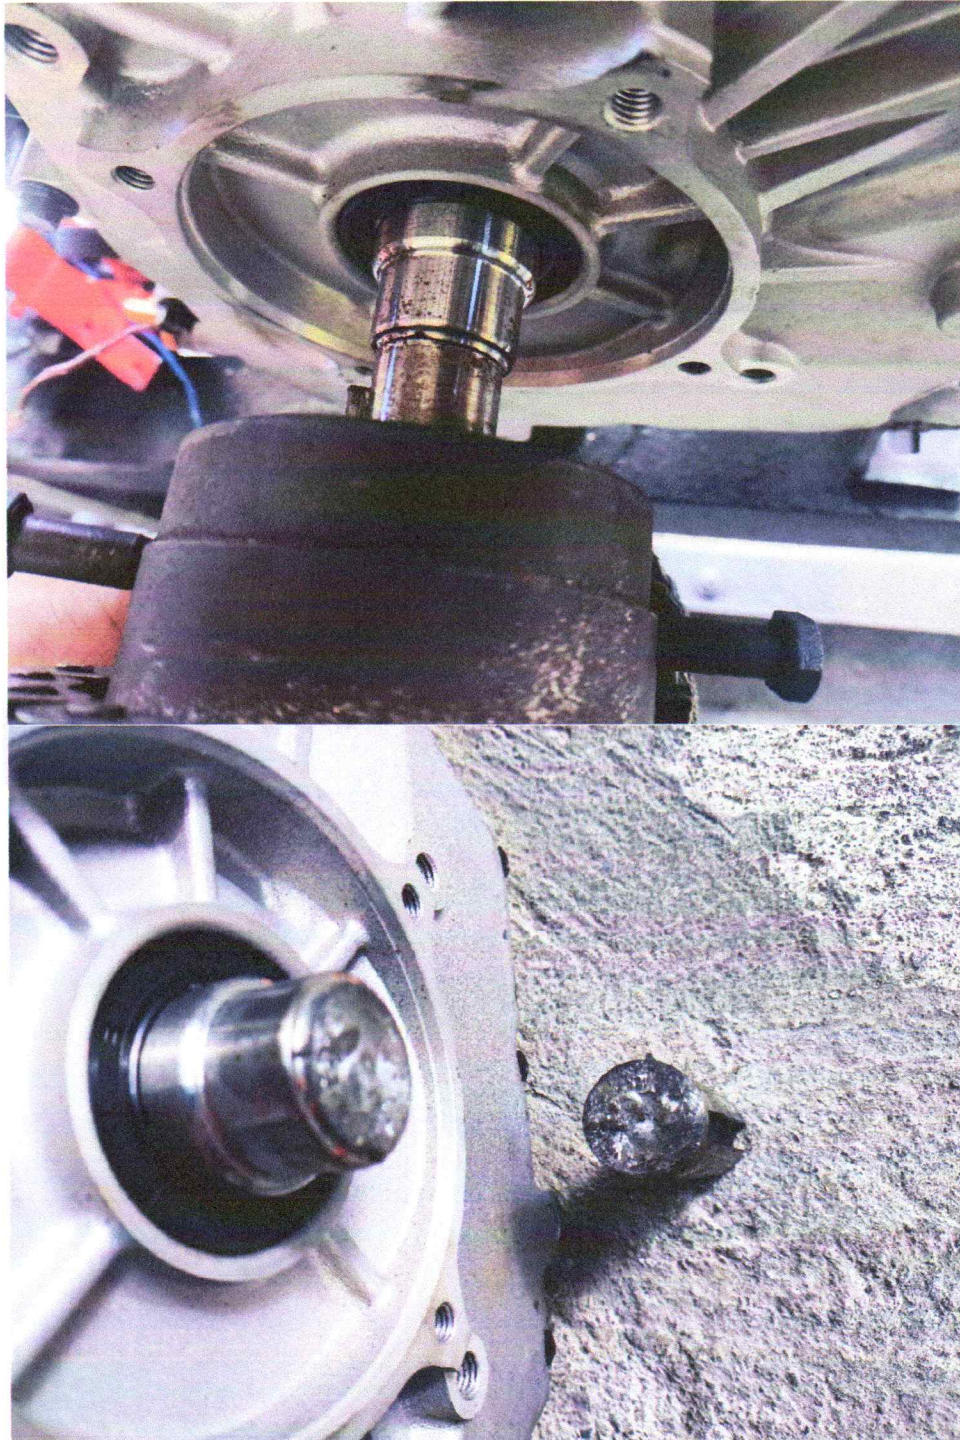
OBSERVATIONS

Figure 1. Observed engine shaft had snapped.

OBSERVATIONS (Cont'n)


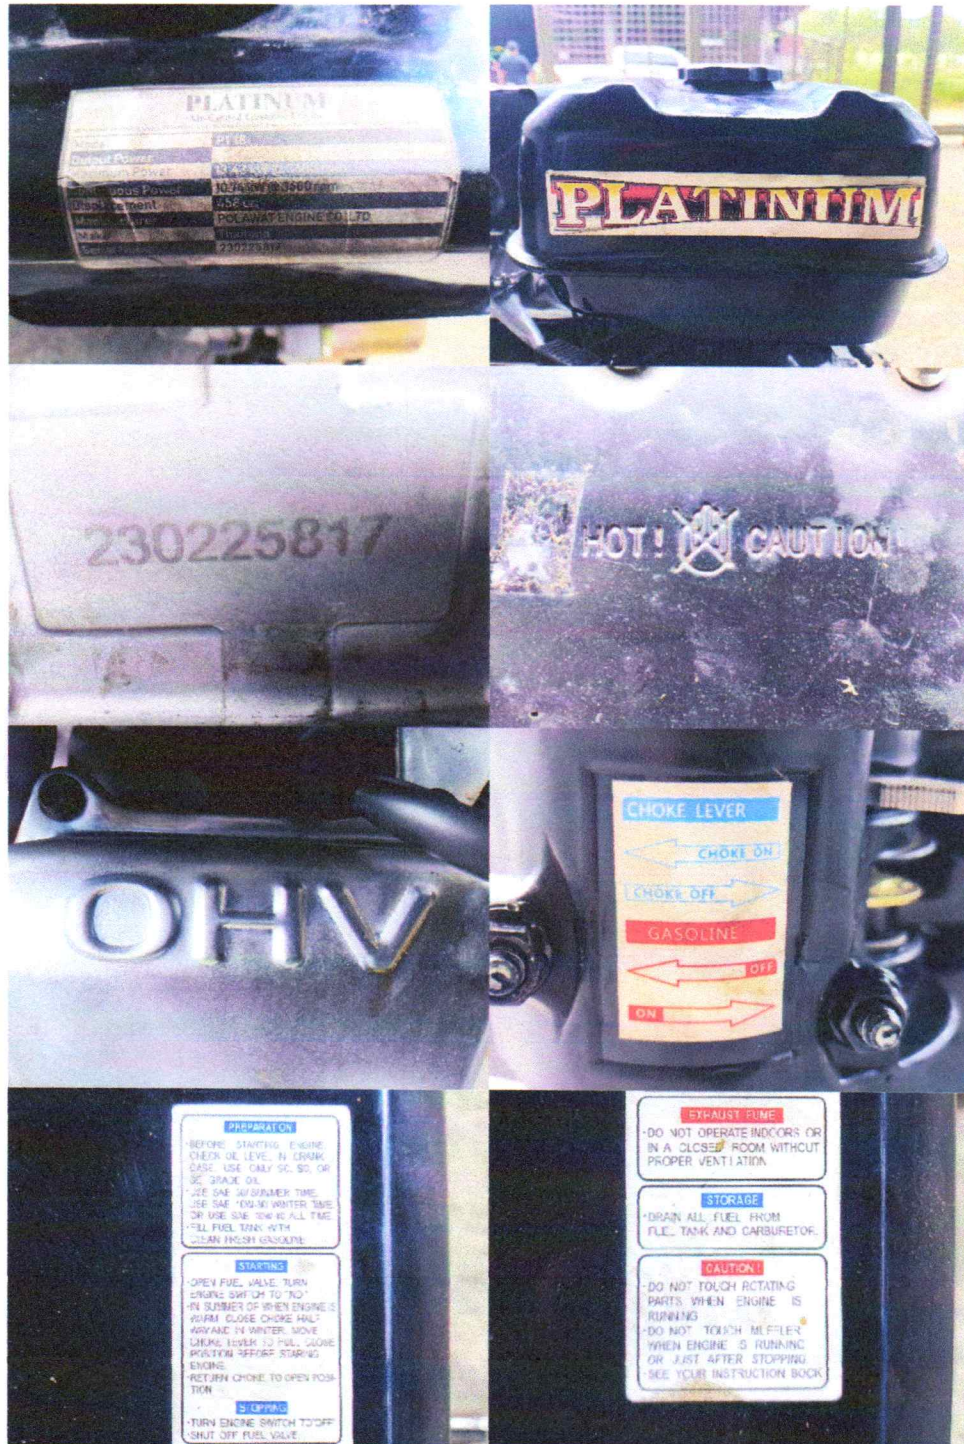


Figure 2. Components nameplate, markings, warning notices of Internal Combustion Engine PLATINUM PT18.


Prepared by:



JEDIDIAH Y. DELA CRUZ.

Test Engineer

Noted by:



ARTHUR L. FAJARDO

AMTEC Director