

Standard Abbreviations and Terms

TS = Tube Steel
HSS = Hollow Structural Section
GA = Gauge
HAS = Headed Anchor Stud
DBA = Deformed Bar Anchor
LVL = Laminated Veneer Lumber
PT Slab = Post Tensioned Concrete Slab
CMU = Concrete Masonry Unit
ID = Inside Diameter
GALV = Galvanized
GYP = Gypsum or Gypcrete
LH = Left Hand
RH = Right Hand
QTY = Quantity
T&B = Top And Bottom
TOS = Top Of Steel
TOC = Top Of Concrete
TYP = Typical
STD = Standard
AFF = Above Finish Floor
ARCH = Architect/Architecturally
BOS = Bottom Of Steel
BOC = Bottom Of Concrete
CONT = Continuous
EQ= Equal
MTL = Metal
OD = Outside Diameter
PL = Plate
PAF = Powder Actuated Fastener
STRUCT = Structure/Structural
TBD = To Be Determined
UNO = Unless Noted Otherwise
WWM = Welded Wire Mesh
GLULAM = Glue Laminated
WHR = Wall Handrail
RHU = Right Hand Up
LHU = Left Hand Up

Ledger = Material (normally angle iron)
fastened to building made to hold brick

Lintel = Material (normally angle iron) not
fastened to building (normally bears on
brick on both sides) to hold brick above
opening

Shear wall and holdowns = Wall constructed
to withstand lateral forces and prevent
uplift. Connected to concrete slab using
holdowns.

Lumber Guide

Dimensional Lumber

Standard types are doug (douglas) fir,
spruce, hem fir

Actual sizes differ from nominal dimensions

Nominal dimensions less than or equal to 1"
are reduced by $\frac{1}{4}$ "

Nominal dimensions greater than 1" and
smaller than 7" are reduced $\frac{1}{2}$ "

Nominal dimensions greater than 7" are
reduced by $\frac{3}{4}$ "

Examples:

2x4 = $1\frac{1}{2}$ "x $3\frac{1}{2}$ "

6x12 = $5\frac{1}{2}$ "x $11\frac{1}{4}$ "

Engineered Lumber




Standard types are Glulam, LVL

Actual dimensions do not differ from
nominal dimensions

Example:

$1\frac{3}{4}$ "x $11\frac{1}{4}$ " LVL is actually $1\frac{3}{4}$ "x $11\frac{1}{4}$ "


[illegible]

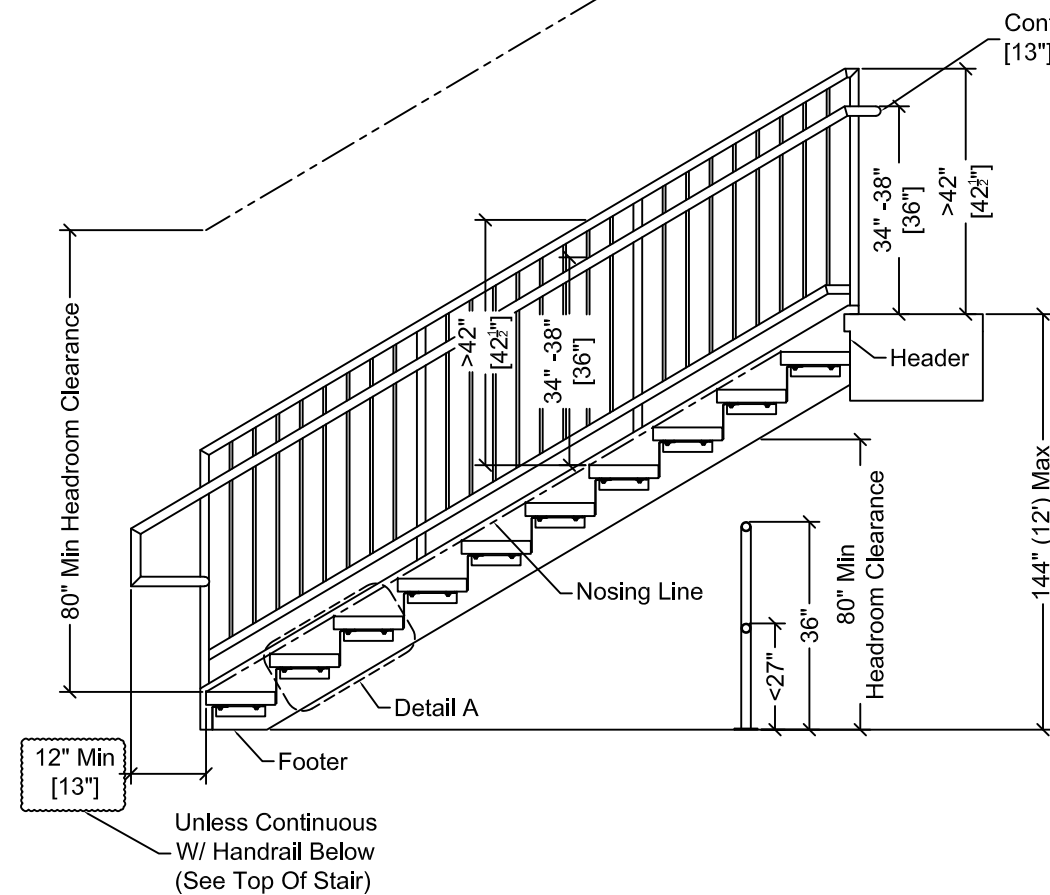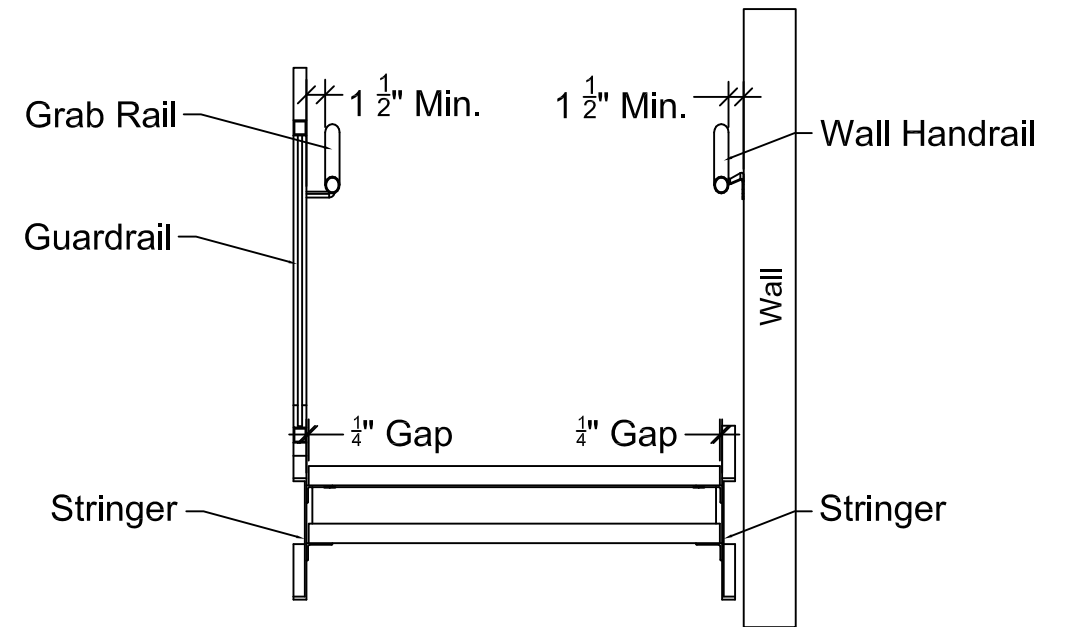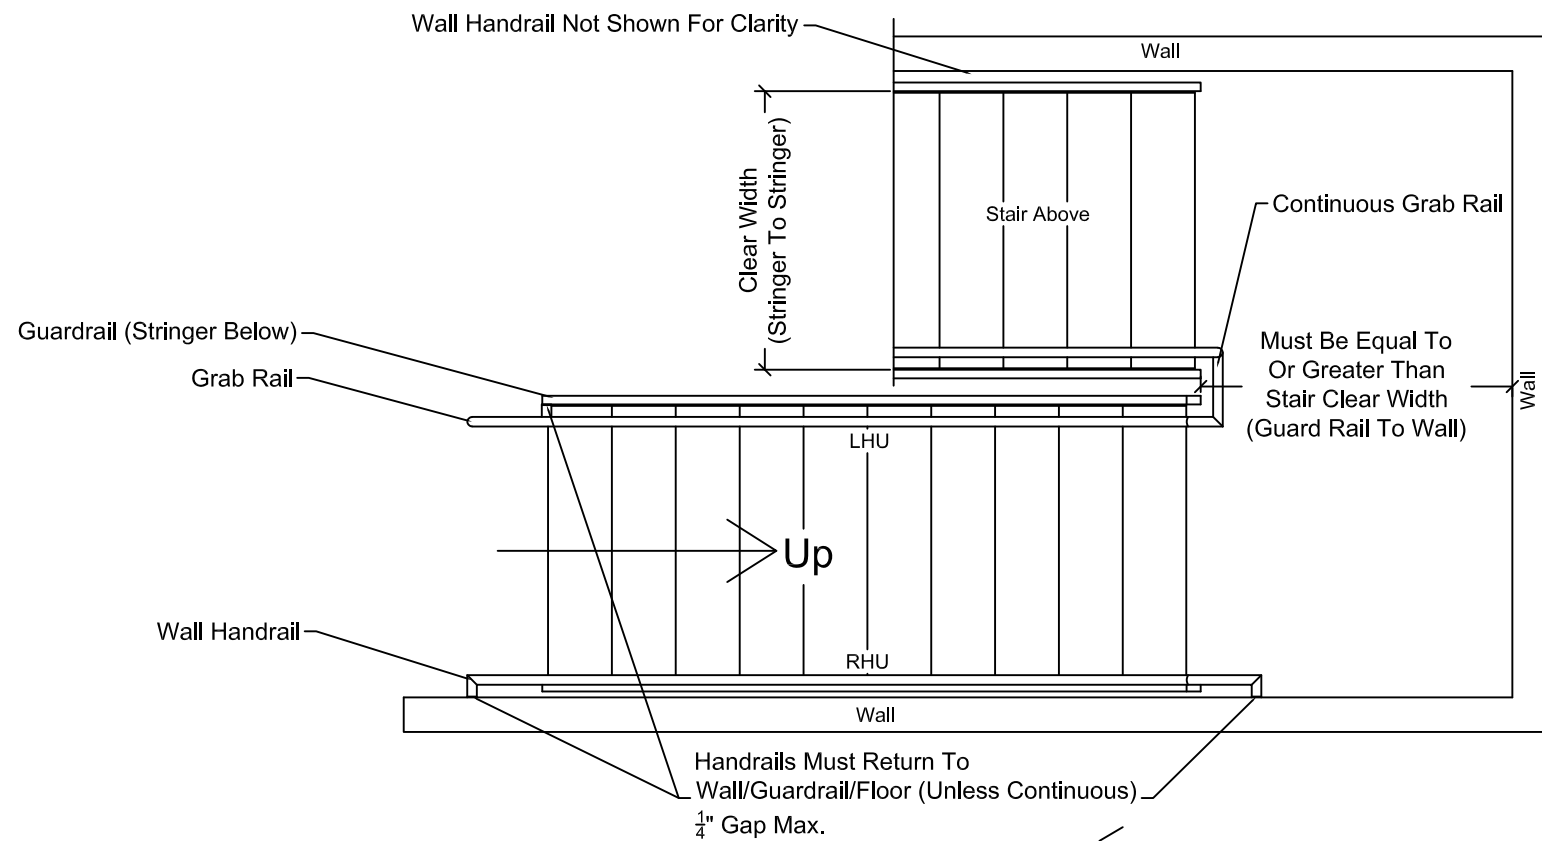

Continuous With Handrail Above Or 12" [13"] Past Nosing (See Bottom Of Stair)

MHMM Std. Reduce By $\frac{1}{4}$ "

Opening Limitations:
 0"-36" = <4" Max Opening
 36"-42" = <4 $\frac{3}{8}$ " Max Opening

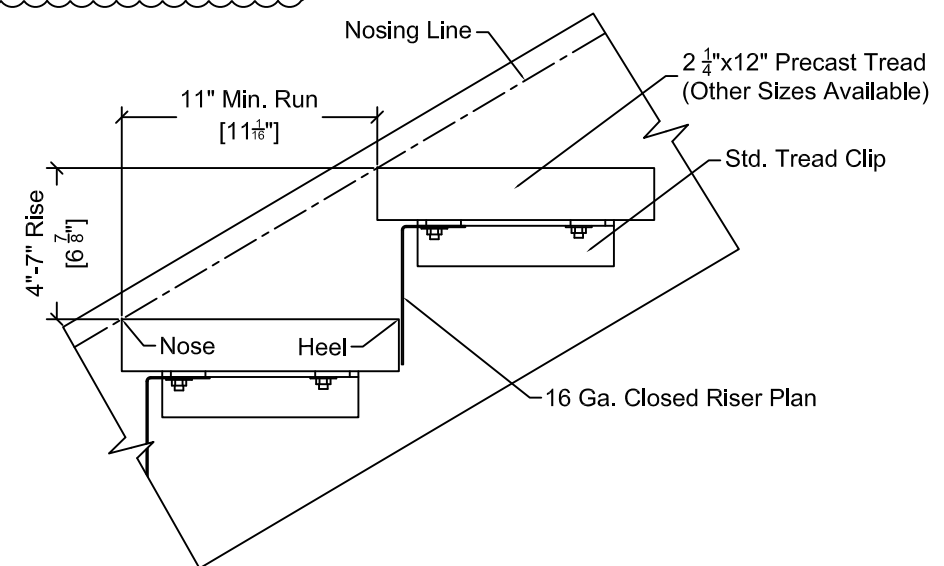


Detail A


Treads Can Slope $\frac{1}{4}$ "/12" In Any Direction
 Max Tread Height Variance = $\frac{3}{8}$ " In Single Flight Of Stairs

MHFW Std. Reduce By $\frac{1}{4}$ "

Opening Limitations:
0"-36" = <4" Max Opening
36"-42" = <4 $\frac{3}{8}$ " Max Opening

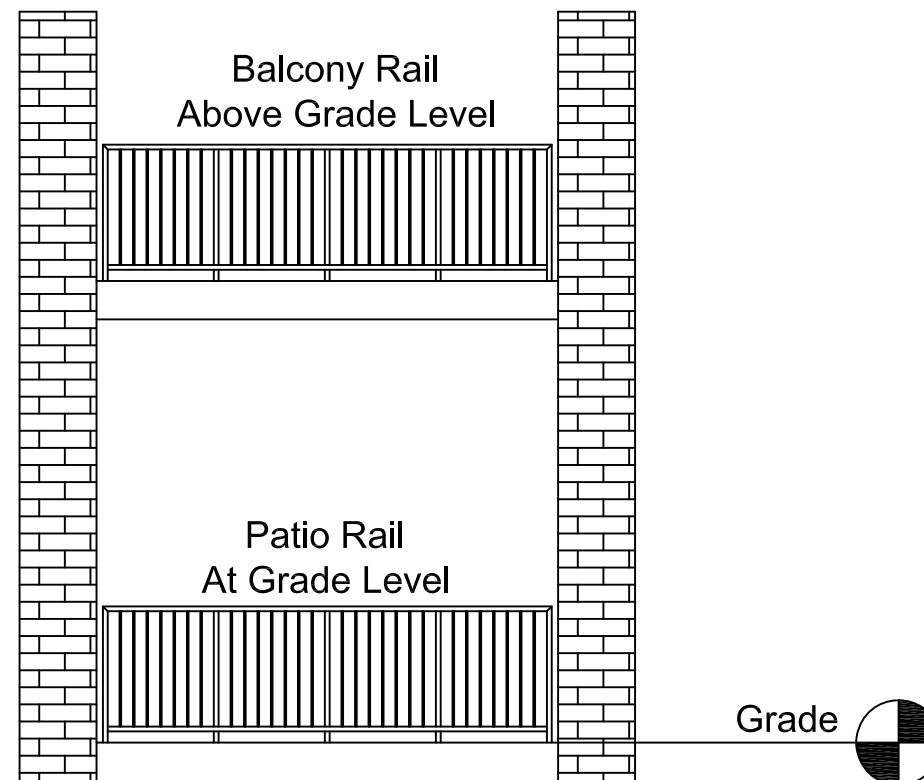


No Fall Protection Needed

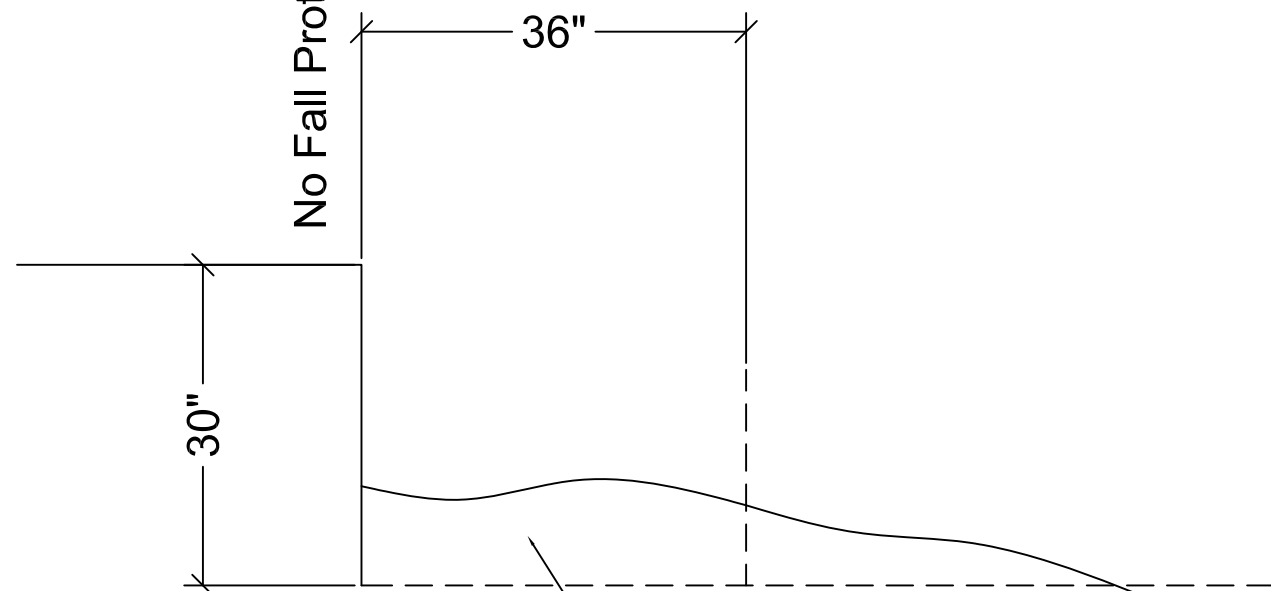


Grade/Floor Does Not Drop More Than 30"
Vertically Within 36" Horizontally From Edge

Fall Protection Not Needed

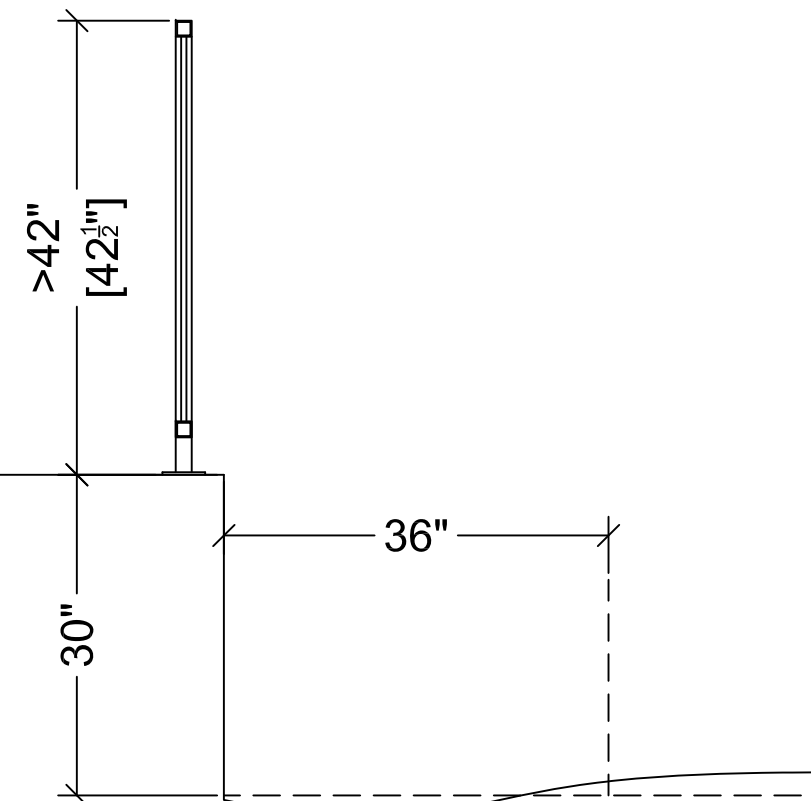


Grade/Floor Drops More Than 30" Vertically
Within 36" Horizontally From Edge


Fall Protection Needed

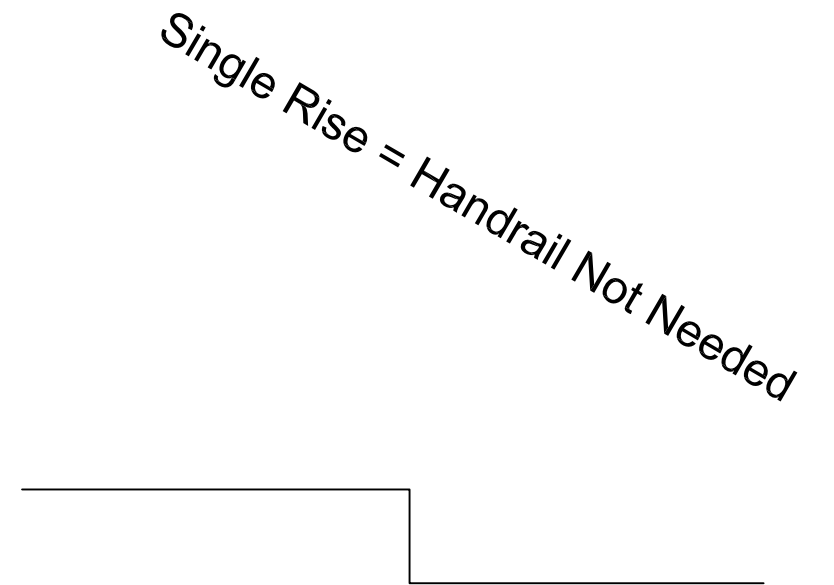


When Required:
At 2 Or More Rises
At Any Ramp Where Overall Rise Is Greater Than 6"
and slope is 5% (2.86°) or greater

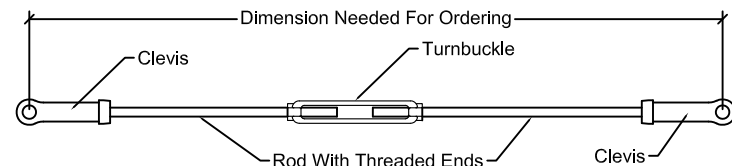


Clevis Assembly With Turnbuckle
(Can Be Ordered Without Turnbuckle)




Lag Screw
Used For Fastening To Wood
Holes to Be $\frac{1}{16}$ " - $\frac{1}{8}$ " Oversized



Simpson SDS Screw
Used For Fastening To Wood
Only Availablee in $\frac{1}{4}$ "Ø
Holes to Be $\frac{1}{16}$ " Oversized

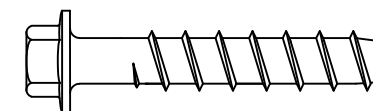


Simpson Titen HD Anchor
Used For Fastening To Concrete/Masonry
Holes to Be $\frac{1}{8}$ " Oversized




Self Tapping Screw/Tek Screw
Used For Fastening Steel To Steel
Holes to Be $\frac{1}{16}$ " Oversized




Wedge Anchor
Used For Fastening To Concrete/Masonry
Holes to Be $\frac{1}{16}$ " Oversized

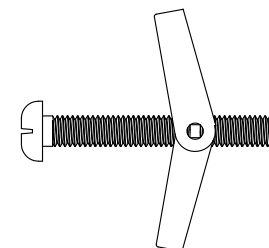


Toggle Bolt
Used For Fastening To Drywall
Holes to Be $\frac{1}{16}$ " - $\frac{1}{8}$ " Oversized

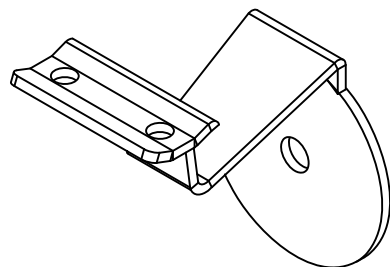


Wall Handrail Bracket
Used For Attaching Wall Handrail To Wall
Flat and Round Top Available
See Typ. Parts Book

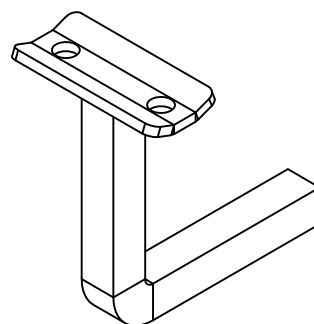

Grab Rail Bracket
Used For Attaching Grab Rail To Guardrail
Flat and Round Top Available
See Typ. Parts Book

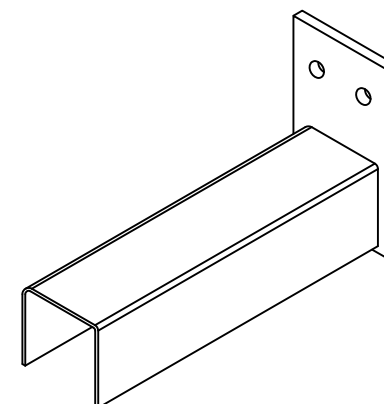

Top Saddle Clip
Used For Attaching Top Rail Of Guardrail To Wall
Different Variations Available
See Typ. Parts Book

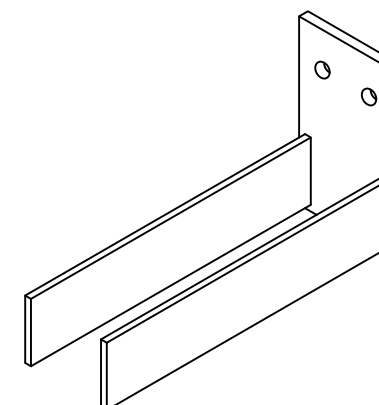

Bottom Saddle Clip
Used For Attaching Bottom Rail Of Guardrail To Wall
Different Variations Available
See Typ. Parts Book