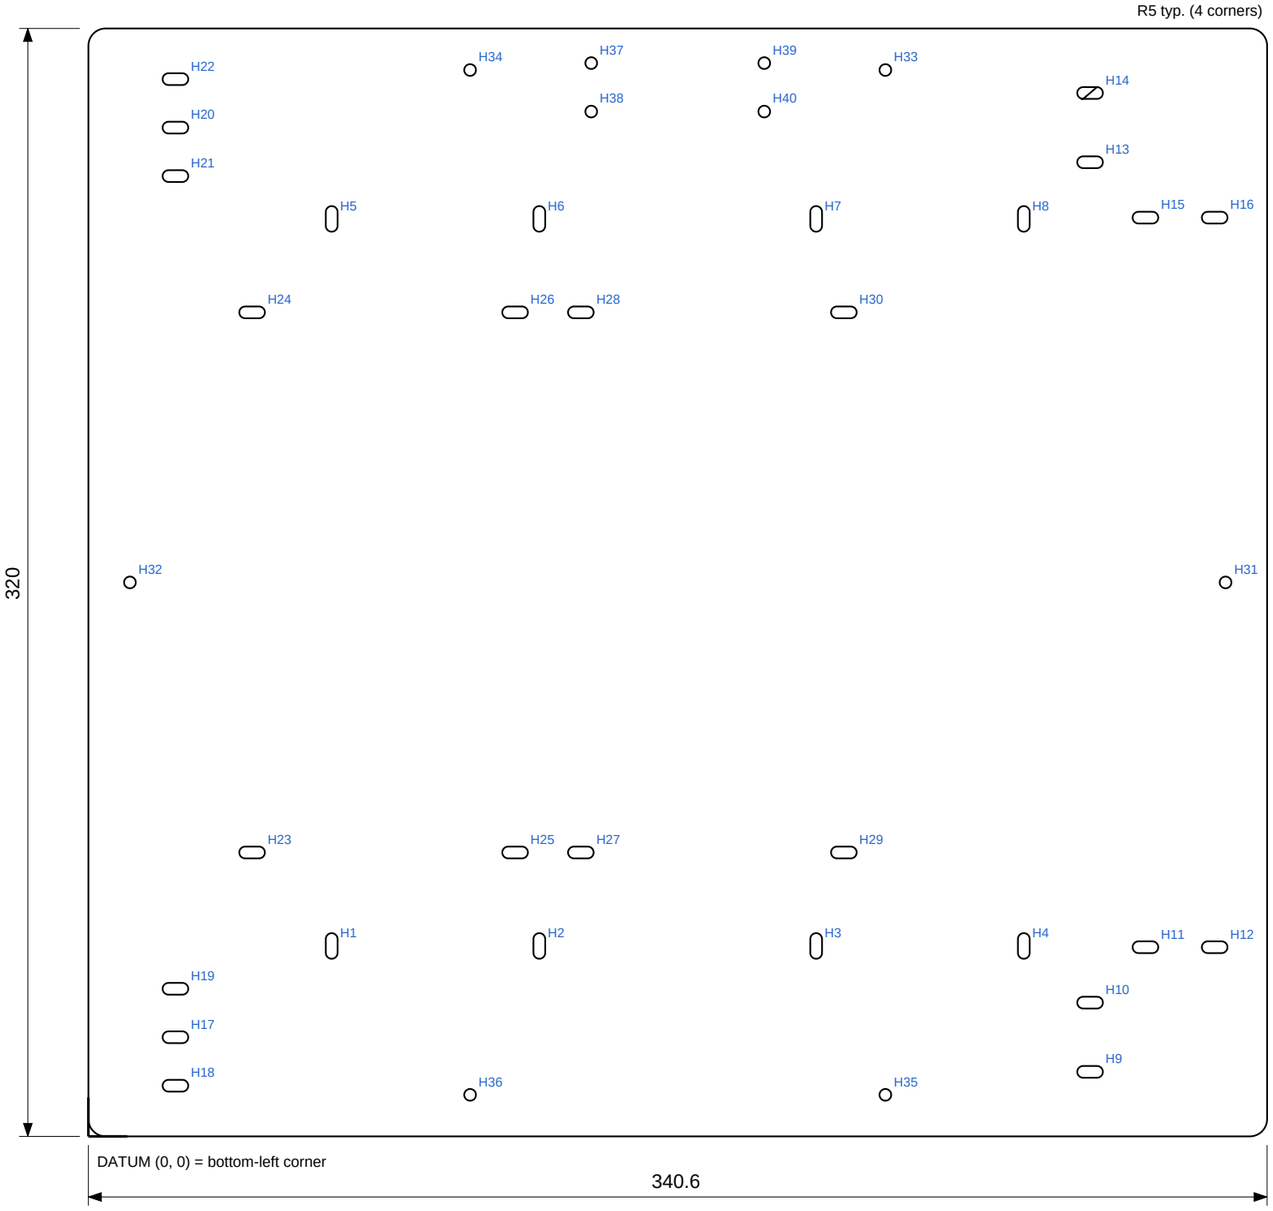


ID	Type	X	Y	Feature
H1	slot 3.4×7.4, along Y	70.3	55.0	rail riser
H2	slot 3.4×7.4, along Y	130.3	55.0	rail riser
H3	slot 3.4×7.4, along Y	210.3	55.0	rail riser
H4	slot 3.4×7.4, along Y	270.3	55.0	rail riser
H5	slot 3.4×7.4, along Y	70.3	265.0	rail riser
H6	slot 3.4×7.4, along Y	130.3	265.0	rail riser
H7	slot 3.4×7.4, along Y	210.3	265.0	rail riser
H8	slot 3.4×7.4, along Y	270.3	265.0	rail riser
H9	slot 3.4×7.4, along X	289.5	18.6	motor cradle
H10	slot 3.4×7.4, along X	289.5	38.6	motor cradle
H11	slot 3.4×7.4, along X	305.5	54.6	motor cradle
H12	slot 3.4×7.4, along X	325.5	54.6	motor cradle
H13	slot 3.4×7.4, along X	289.5	281.4	motor cradle
H14	slot 3.4×7.4, along X	289.5	301.4	motor cradle
H15	slot 3.4×7.4, along X	305.5	265.4	motor cradle
H16	slot 3.4×7.4, along X	325.5	265.4	motor cradle
H17	slot 3.4×7.4, along X	25.2	28.6	corner idler bolt
H18	slot 3.4×7.4, along X	25.2	14.6	corner bracket
H19	slot 3.4×7.4, along X	25.2	42.6	corner bracket
H20	slot 3.4×7.4, along X	25.2	291.4	corner idler bolt
H21	slot 3.4×7.4, along X	25.2	277.4	corner bracket
H22	slot 3.4×7.4, along X	25.2	305.4	corner bracket
H23	slot 3.4×7.4, along X	47.3	82.0	phone tray
H24	slot 3.4×7.4, along X	47.3	238.0	phone tray
H25	slot 3.4×7.4, along X	123.3	82.0	phone tray
H26	slot 3.4×7.4, along X	123.3	238.0	phone tray
H27	slot 3.4×7.4, along X	142.3	82.0	phone tray
H28	slot 3.4×7.4, along X	142.3	238.0	phone tray
H29	slot 3.4×7.4, along X	218.3	82.0	phone tray
H30	slot 3.4×7.4, along X	218.3	238.0	phone tray
H31	Ø3.4 thru	328.6	160.0	foot
H32	Ø3.4 thru	12.0	160.0	foot
H33	Ø3.4 thru	230.3	308.0	foot
H34	Ø3.4 thru	110.3	308.0	foot
H35	Ø3.4 thru	230.3	12.0	foot
H36	Ø3.4 thru	110.3	12.0	foot
H37	Ø3.4 thru	145.3	310.0	camera mast (reserved)
H38	Ø3.4 thru	145.3	296.0	camera mast (reserved)
H39	Ø3.4 thru	195.3	310.0	camera mast (reserved)
H40	Ø3.4 thru	195.3	296.0	camera mast (reserved)

NOTES

1. Material: aluminium 5052-H32 (6061-T6 acceptable), 3.0 mm sheet. Qty 1.
2. Laser cut. No bends, no threads, no countersinks.
3. All holes Ø3.4 through. Slots 3.4 wide × 7.4 overall (4.0 between arc centres).
4. Table gives hole / slot centres from the datum, in mm.
5. General tolerance ISO 2768-m. Deburr all edges. Finish: none (raw).
6. Geometry is defined by the STEP file. Drawing not to scale.

iPhone-Ian: BASE PLATE

340.6 × 320 × 3.0 mm aluminium, 40 holes

Rev A | 2026-10-10 | units mm | source: aria/cad/base_plate.py