LOCAL TRAFFIC REGULATIONS

1. All fixed wing ACFT ABV 20,000KG must make MAX RAD turns at MNM speed at all turning pads to avoid SFC damage.
2. All ACFT to follow APN markings.
3. All jet ACFT to use idle power for movements on the APN with the exception of breakaway thrust to initiate taxi. ACFT that cannot comply with this restriction must advise the AD OPR prior to departure.
4. RWS not AVBL for flight OPS.

CTAF - AFRU 126.7

AFRU located at YBGD. Not AVBL on ground.

CHARTS RELATED TO THE AERODROME

1. WAC 3229.
2. Also refer to AIP Departure and Approach Procedures.

KERANG ELEV 255

AVFAX CODE 3028

VIC		UTC +10	YKER
354505S	1435622E	VAR 11 DEG E	CERT

AD OPR Gannawarra Shire Council, 47 Victoria Street, Kerang, VIC, 3579. PH 03 5450 9333. Fax 5450 3023.

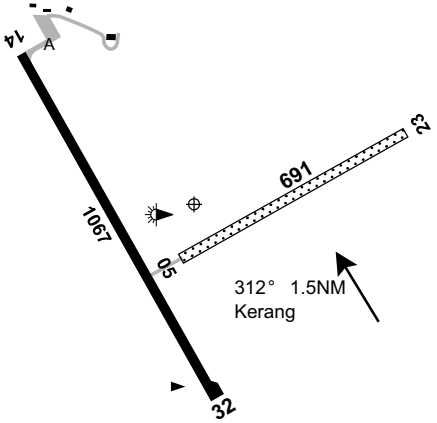

HANDLING SERVICES AND FACILITIES

AVGAS 100LL and JET A1, Aero Refuellers Carnet card, Visa or MC only. Phone 0413 003 808.

PASSENGER FACILITIES

WC.

AERODROME OBSTACLES

1. Tower 423FT, 1,903M NW of 14 RWS end infringes HZS.
2. Lit towers:
   a. 476FT AMSL PSN 354551.5S 1435735.8E. Infringes HZS by 76FT.
   b. 426FT AMSL PSN 354400.7S 1435516.8E. Infringes HZS by 26FT.
   c. 472FT AMSL PSN 354617.3S 1435558.6E. Infringes HZS by 72FT.
3. Unlit tower 427FT AMSL PSN 354345.2S 1435504.4E. Infringes HZS by 27FT.

PHYSICAL CHARACTERISTICS

05/23	048	23c	5700 kg/0.40 MPa White sand.	WID 18	RWS 90
14/32	138	35a	5700 kg/0.40 MPa	WID 18	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 14/32 LIRL(1) PAL 123.4 SDBY PWR AVBL

(1) PAL requires three one-second pulses to activate.

OTHER LIGHTING
1. SDBY PWR switchover time: 30 SEC.
2. TWY LGT: Blue edge, TWY A only.

ATS AND AERODROME COMMUNICATION FACILITIES
FIA	MELBOURNE CENTRE	125.8 2000FT

CTAF - AFRU 126.7

CHARTS RELATED TO THE AERODROME
1. WAC 3458.
2. Also refer to AIP Departure and Approach procedures.

KHOLO HELIPAD

ELEV 220

FULL NOTAM SERVICE NOT AVBL

QLD		UTC +10	YKHO
272952S	1524628E	VAR 11 DEG E	UNCR

AD OPR Matthew Gadsby, 479 Lake Manchester Road, Kholo, QLD, 4306.
Email: mindydavies81@gmail.com. PH 0434 300 070.

REMARKS
1. HJ OPS only.
2. Due to the limited space, prior approval is required unless in the case of an EMERG.
3. CAUTION: This HLS is not subject to NOTAM advice of unserviceability. Approvals and HLS conditions can be obtained from the contact telephone number above.

AERODROME OBSTACLES
Windsock located on hangar roof.

ATS AND AERODROME COMMUNICATION FACILITIES
FIA	BRISBANE CENTRE	121.2 Circuit Area
ACD	AMBERLEY DELIVERY	134.6 (1)
APP	AMBERLEY APPROACH	126.2 (1)
TWR	AMBERLEY TOWER	118.3 (1)

(1) Circuit area.

LOCAL TRAFFIC REGULATIONS
1. Amberley provides ATS within the CTR from SFC to 8,500FT when active - check NOTAMS.
2. During activated CTR periods contact Amberley Clearance and Delivery for clearance.
3. During deactivated CTR periods airspace - CTAF procedures apply within the zone.
4. Overnight HEL parking available on the pad or on grassed area to the NE of the pad (sloping ground NE to SW).

FLIGHT PROCEDURES
1. ARRIVING ACFT
   a. Arrivals from the EAST (328DEG M)
   b. Arrivals from the WEST (119DEG M)

2. DEPARTING ACFT
   a. Departure to the EAST (148DEG M)
   b. Departure to the WEST (299DEG M)

Note: Contact YAMB on the ground prior to departure on 07 5361 3349 for status and/or clearance.

CTAF 118.3

NOISE ABATEMENT PROCEDURES
On approach and departure remain North of Lake Manchester Road to avoid housing within 0.5NM of the South and South West of the HLS.

ADDITIONAL INFORMATION
1. CAUTION AIRSPACE - HLS is within YAMB CTR (contact YAMB or YBBN for airspace status).
2. CAUTION TRAFFIC - HLS is within 1NM of the Lake Manchester (LMC) VFR call up point.
3. Amberley AWIS 07 3564 3700 - CAUTION HLS conditions may differ due to local terrain.
4. Bird and wildlife hazard exists.

Information may be continued on the next page: PTO