14. Upon completion of refuelling from the AVGAS bowser facilities - aircraft must be moved to available parking in a reasonable time period.
15. On RWY 06/24, ACFT above 5,700KG: 180 DEG turns are to be performed at turning nodes only.
16. RWY strip RWY 06/24 and RWY 18/36 WIP (mowing) 5 MIN PN for ARR and DEP ACFT CS: 'MOWER 1' via CTAF. DLY 2100-0400 UTC.

CTAF - AFRU 126.55

ADDITIONAL INFORMATION

1. Bird and animal hazard exists. Advise AD OPR of bird strikes, as soon as practicable. *Note: No wildlife dispersal resources available after 1500 Local (unless deemed urgent).*
2. Portable 98 octane refuelling trailer (for RAAus ACFT) parked on northern grass area opposite the Griffith Aero Club (on the GA tie down cable) - 20M east of AVGAS fuel bowser. Trailer marked clearly with U/S markers and red illumination.
3. The AD OPR and Airport Coordinator MUST be advised (in writing) for approval to bring any grade of fuel and/or diesel onto the airside aerodrome environment.
4. Caution: Emergency services vehicles mounted with red/blue warning lights operate frequently on TWY B, TWY F and the APN area designated for aeromedical operations (opposite the Griffith Aero Club).
5. Caution: High aerial agricultural ACFT OPS to and from AD and at TWY D FM OCT-FEB.
6. Caution: ARO operating mower/slasher equipment inside RWY strips.
7. Caution: High RAAus flying training operations and circuit traffic.

CHARTS RELATED TO THE AERODROME

1. WAC 3457.
2. Also refer to AIP Departure and Approach Procedures.

GROOTE EYLANDT ELEV 53

AVFAX CODE 8010

NT		UTC +9:30	YGTE
135824S	1362739E	VAR 4 DEG E	CERT

AD OPR Groote Eylandt Mining Co., Alyangula, NT, 0885. Email: gteairport@amsaustralia.com or grootearo@amsaustralia.com. ARO 0447 866 322.

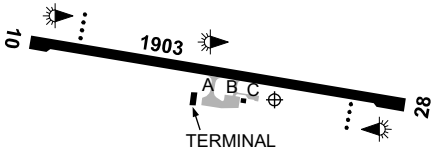

REMARKS

1. AD Charges: All ACFT.
2. Groote Eylandt is the freehold property of the Anindilyakwa people. Access is restricted to the leasehold areas of the Groote Eylandt Mining Company (GEMCO) and Alyangula Township unless you hold a permit. Permits can be obtained from the Anindilyakwa Land and Sea Rangers. Phone 08 8987 6703 for details.
3. Cane toads are prohibited on Groote Eylandt. It is a strict quarantine requirement that other plant and animal species must not be brought to Groote Eylandt without permission from the Anindilyakwa Land and Sea Rangers. Phone 08 8987 6703 for details.
4. Alcohol restrictions are in place on Groote Eylandt.
5. This AD is a security controlled airport.
6. RPT and GA OPS not AVBL TUE 0630-0830 and 1730-1930 Local.

HANDLING SERVICES AND FACILITIES

World Fuel Services: AVGAS WFS carnet card and credit card (via smartphone APP) bowser H24. JET A1 AVBL for RPT OPS, otherwise by arrangement. Charges may change without notice. Call-out fees may apply to AH refuelling weekends and BTN 1800-0600 Local MON-FRI.
PH: 0437 591 796.
Groote Freight (Ground Handling Agent) - MOB: 0438 945 126. Email: grootefreight@bigpond.com

Information may be continued on the next page: PTO

PASSENGER FACILITIES

WC/HC (by arrangement).

APRONS AND TAXIWAYS

1. TWY B to GA apron NOT AVBL to ACFT ABV 5,700KG MTOW.
2. Helicopter Operations: 30MIN PRKG position RPT APN Bay 2 via TWY A 24HR prior notice. Unsealed PRKG contained by blue markers E of GA APN. The unsealed HEL APN is not a designated HLS.
3. TWY C MAX wingspan 15M.
4. 24HR PN required for overnight GA PRKG.

AERODROME OBSTACLES

1. Terrain penetrations:
   a. BRG 061 MAG 3.0NM FM ARP. Infringes conical SFC by 7FT.
   b. BRG 083-103 MAG 2.4-3.2NM FM ARP. Infringes IHS and conical SFC by 1-115FT.
   c. BRG 142 MAG 2.8NM FM ARP. Infringes conical SFC by 10FT.
   d. BRG 149 MAG 2.3NM FM ARP. Infringes IHS and conical SFC by 26FT.
2. Trees:
   a. 66FT AGL BRG 104-106 MAG 0.49-0.6NM FM ARP. Infringe TNS by 7FT.
   b. 74FT AGL BRG 266-275 MAG 0.3-0.8NM FM ARP. Infringe TNS by 17FT.
   c. 76FT AGL BRG 290-297 MAG 0.43-0.64NM FM ARP. Infringe TNS by 26FT.
   d. 77FT AGL BRG 013-084 MAG 0.12-0.52NM FM ARP. Infringe TNS by 20FT.
3. Lit TWR 190FT AMSL BRG 256 MAG 1.03NM FM ARP.
4. RWY 10/28 TNS on S side infringed BTN TWY A and W end by trees 150M S of CL. Infringes up to 22FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT C, METAR/SPECI.
2. AWIS Phone 08 7922 2506 - Report faults to BoM.
3. AWIS FREQ 128.65 (requires one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

10/28	096	62a	PCR 210/F/A/1.08 MPa/T Grooved. Last 60M of both ends including turning nodes are ungrooved.	WID 30	RWS 150

AERODROME AND APPROACH LIGHTING

RWY 10/28	LIRL	AFRU+PAL 126.0		SDBY PWR AVBL
RWY 10/28	PTBL(2)			BY PRIOR ARRANGEMENT
RWY 10	PAPI(1)	AFRU+PAL 126.0	3.0 DEG46FT	SDBY PWR AVBL
RWY 28	PAPI(1)	AFRU+PAL 126.0	3.0 DEG41FT	SDBY PWR AVBL

(1) Left side.
(2) 90MIN PN.

1. PAPI MEHT design ACFT: E190. PAPI may not provide standard wheel clearance for aircraft in the 5M < 8M eye-to-wheel height group.
2. RWY edge light spacing: 10/28: 60M.

OTHER LIGHTING

1. SDBY PWR switchover time: 30 SEC.
2. TWY LGT: Blue edge on A.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	122.2 On Ground

RADIO NAVIGATION AND LANDING AIDS

DME	GTE	114.8/ 95X	135831.3S	1362717.9E		(1)
NDB	GTE	407	135830.2S	1362719.6E	Range 90 (HN 90)	(2)

(1) Antenna ELEV 84FT.
(2) Range reduced to 50 in sector 090-170

LOCAL TRAFFIC REGULATIONS

1. ACFT over 5,700KG MTOW must turn at turning nodes end RWY 10/28.
2. Request permission to park on RPT APN from AD Manager with 24HR PN.
3. Light ACFT tie-downs not strength rated.

CTAF - AFRU 126.0

ADDITIONAL INFORMATION

1. Blasting may take place HJ. Check current NOTAM. MNT CTAF.
2. Bird hazard exists at sunrise and sunset.
3. Fruit bat hazard exists at sunrise and sunset on RWY and APCH.

CHARTS RELATED TO THE AERODROME

1. WAC 3110.
2. Also refer to AIP Departure and Approach Procedures.

GRUYERE — ELEV 1542

AVFAX CODE 6406

WA		UTC +8	YGRM
280203S	1234851E	VAR 2 DEG E	CERT

AD OPR Gruyere Management Pty Ltd, Level 4, 235 St Georges Terrace, Perth, WA, 6000.
Email: gjv.aerodrome@gruyerejv.com. PH 08 6187 4148: H24 0427 389 326.

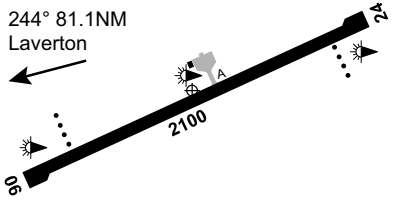

REMARKS

PPR FM AD OPR.

HANDLING SERVICES AND FACILITIES

JET A1 AVBL. Fixed facility. PPR from AD OPR.

AERODROME OBSTACLES

Lit mast HGT 1,562FT AMSL BRG 278 DEG MAG, 222M FM ARP.

METEOROLOGICAL INFORMATION PROVIDED

AWIS FREQ: 133.45MHz (requires three one-second pulses to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

06/24	063	69a	PCR 250/F/B/Y/T	WID 30	RWS 150

AERODROME AND APPROACH LIGHTING

RWY 06/24	LIRL	AFRU+PAL 125.85		SDBY PWR AVBL
RWY 06/24	PAPI(1)	AFRU+PAL 125.85	3.0 DEG48.5FT	SDBY PWR AVBL
RWY 06/24	PTBL(2)			BY PRIOR ARRANGEMENT

(1) Left side only.
(2) 60MIN PN.
RWY 06/24 edge LGT spacing: 60M.

OTHER LIGHTING

Secondary PWR switchover time: 15MIN - manually activated.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	118.4

LOCAL TRAFFIC REGULATIONS

1. RWY 06/24: All fixed wing ACFT ABV 20,000KG must make MAX RAD turns at MNM speed at all turning nodes to avoid SFC damage.
2. All ACFT to follow APN markings.
3. All jet ACFT to use idle PWR for movements on the APN with the exception of breakaway thrust to initiate taxi. ACFT that cannot comply with this restriction must advise the AD OPR prior to DEP.
4. PRKG by prior arrangement with AD OPR.

CTAF - AFRU 125.85

Information may be continued on the next page: PTO