



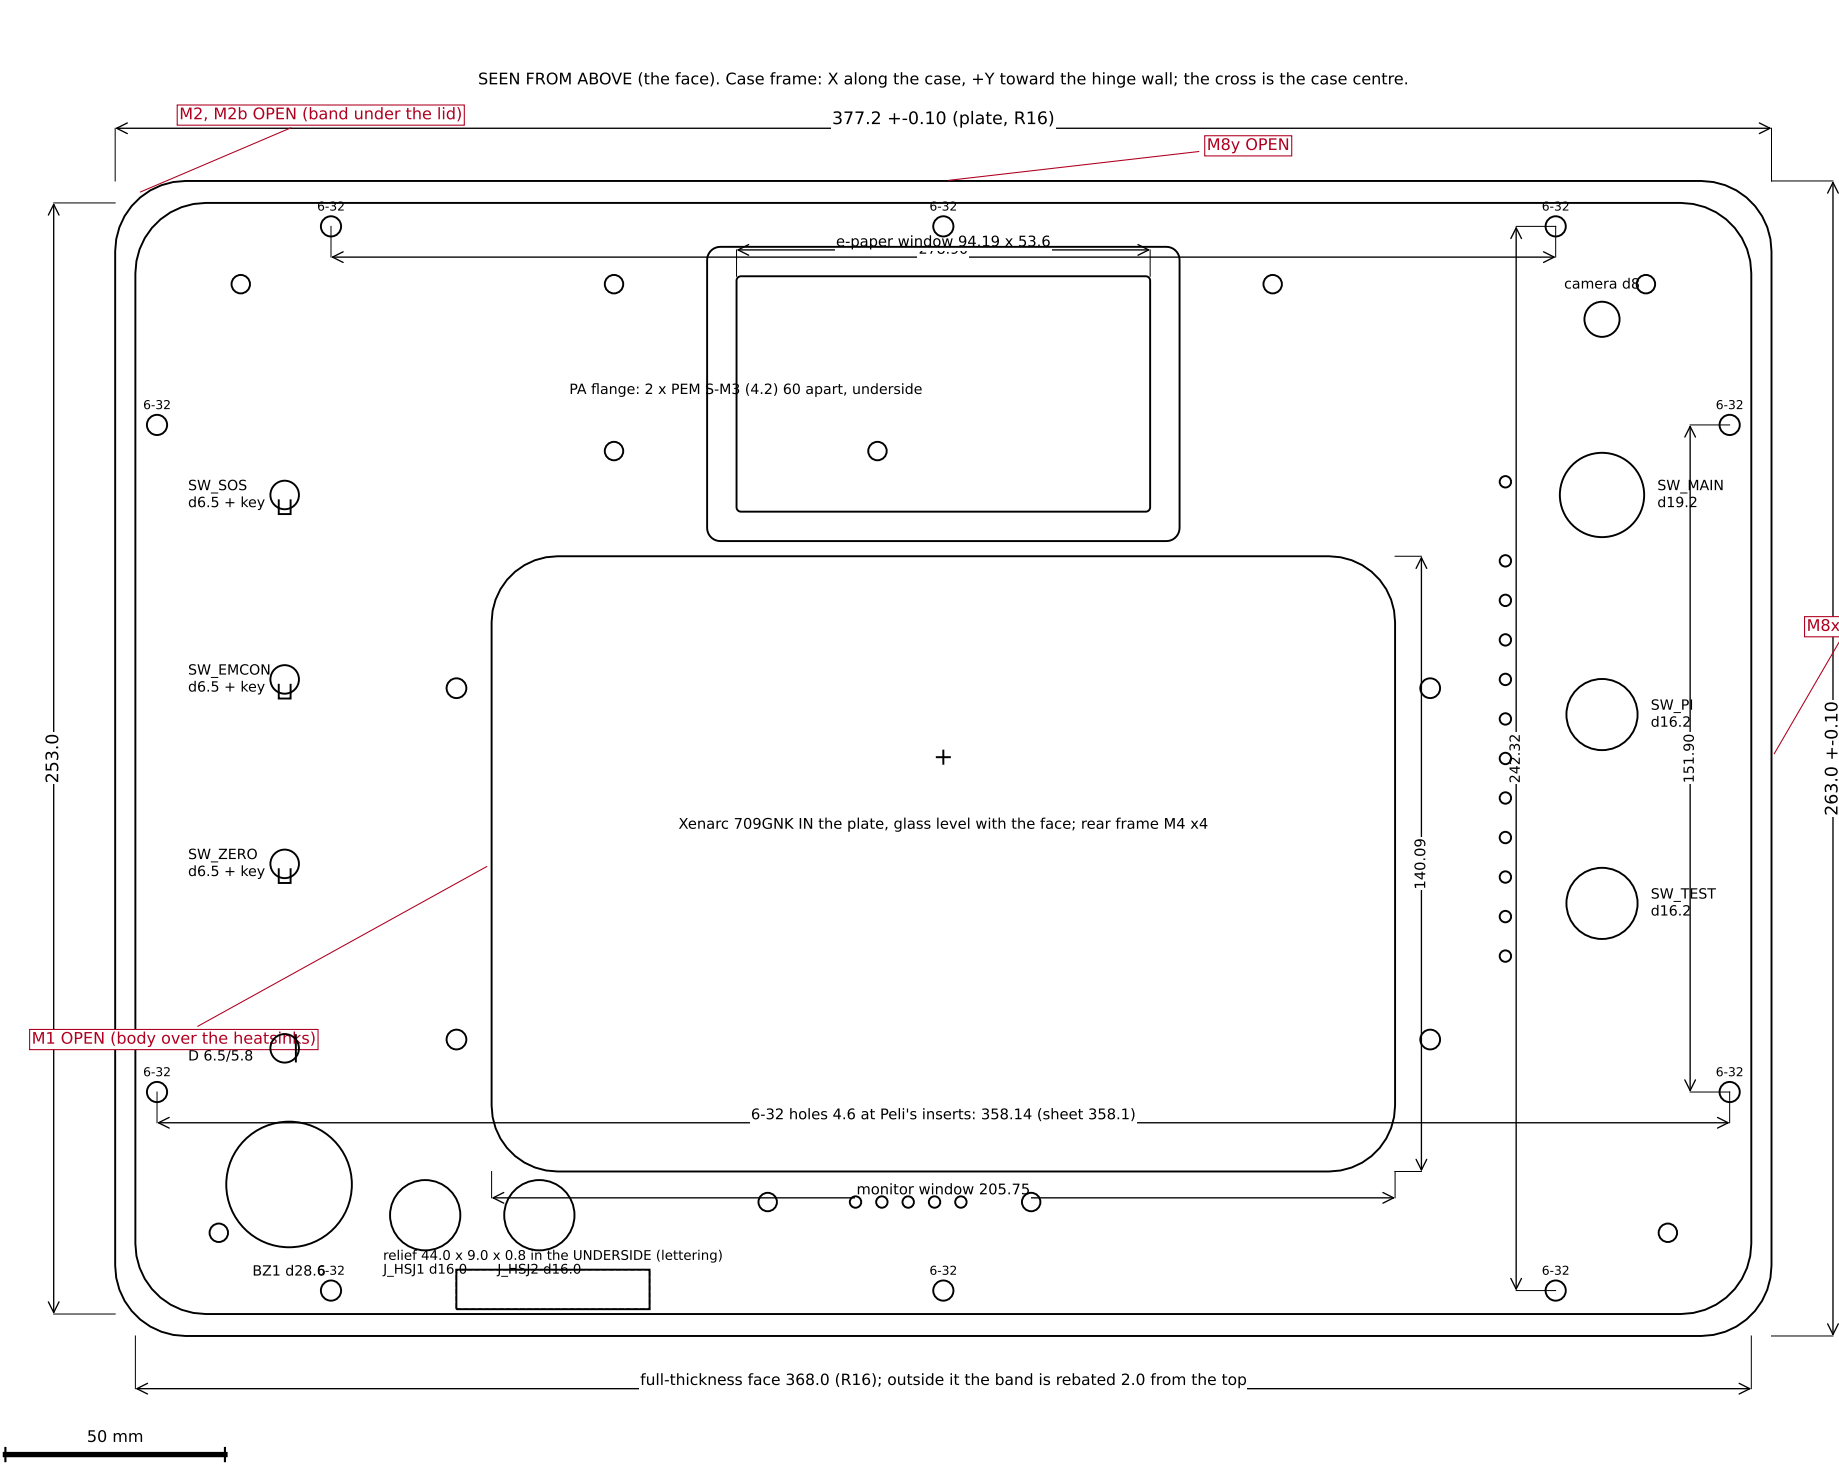

EDGE SECTION at the east end insert (X-Z), not to scale for measurement

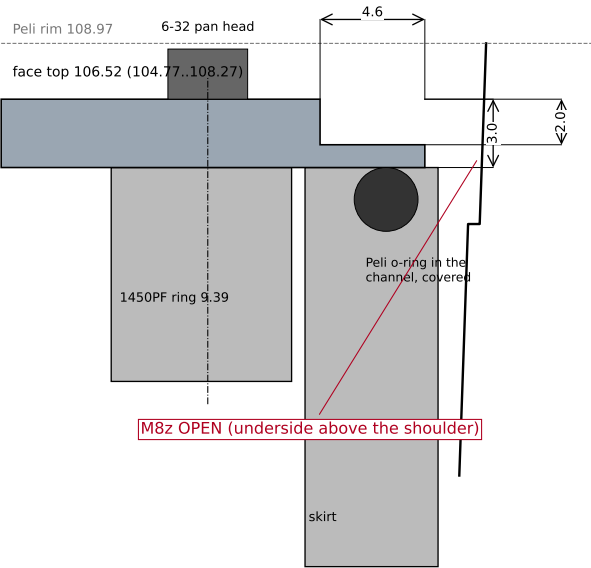

- Plate**
377.2 x 263.0 x 3.0, R16, 5754 or 6061, black anodised; band outside 368.0 x 253.0 rebated 2.0 from the top (1.0 left); relief 44.0 x 9.0 x 0.8 in the underside over the frame's lettering
- Screws**
10 x 6-32 UNC x 1/2 in, A2 pan head (ASME B18.6.3 class, 6.86 across the head at most) from above into Peli's brass inserts (6-32 x 1/4, M3.5 x 6.3), by hand, no pressure (Peli step 4); holes 4.6 at the STEP bores
- Seal**
Peli's o-ring in the channel between the frame and the case wall, covered by the plate (Peli step 4); every cut-out sealed by its part. The PORON ring of the earlier construction is dropped (C1). Water shows it: T3, T7
- Monitor**
Xenarc 709GNK IN the plate at (0, -24), glass level with the face (owner ruling 9 Sep 2026); window 205.75 x 140.09 R15, four M4 (4.5) for the rear frame
- E-paper**
window 94.19 x 53.6 at (0, 83); 1.0 pocket for the 1.0 lens on 0.05 tape
- Controls**
SW_MAIN d19.2; SW_PI d16.2; SW_TEST d16.2; toggles d6.5 + key; NKK D 6.5; sounder d28.6; headsets d16.0; camera d8
- Light guides**
17 x d2.6 H7 (Mentor 1282.5004)
- Standoffs**
8 x PEM 50-M3-10 (4.2) for the backer C; 2 x PEM 5-M3 (4.2) for the PA flange
- Marking**
face-plate-marking.svg (laser)

Margin rows this sheet's features enter (frame_seat.out): key, verdict, min, nominal, worst, worst with unstated x2					
M1	OPEN	2.00	+6.26	+3.62	+1.80 monitor body over the CM5 heatsinks
M2	OPEN	1.00	+4.45	+1.84	-0.44 rebated plate band below the rim, under the lid's wall
M2b	OPEN	1.00	+2.94	+1.25	+0.29 full-thickness face (368.0 x 253.0) inside the lid's opening, in X (Y: 3.29 nominal)
M3	OPEN	1.00	+19.92	+16.39	+14.11 space under the QMX tray for the face parts (lid STEP 45.47; web 44.45 in the worst)
M8x	OPEN	1.00	+2.41	+1.10	+0.52 plate edge to the rim zone in X, frame centred (plate 377.2 wide)
M8y	OPEN	1.00	+2.36	+1.05	+0.47 plate edge to the rim zone in Y, frame centred
M8z	OPEN	0.00	+2.48	+0.10	-2.18 plate underside above the shoulder, so the plate edge faces the rim zone
M8f	MET	0.00	+0.55	+0.07	+0.07 each 6-32 passes its 4.6 plate hole with the inserts at the pattern's worst (float, pattern, hole)
M8h	MET	0.00	+1.50	+0.77	+0.77 6-32 pan heads (6.86 across) on the full-thickness face: end inserts in X (long-wall inserts in Y: 1.91)
M19	MET	1.00	+2.08	+1.70	+1.32 QMX tray east edge inside the lid's flat ceiling (C5)
M21h	MET	1.00	+3.40	+1.51	+1.01 leg column to the backer ring's outer edge (X 172, panel1450.py:93-95)

TOLERANCES AND STATUS
Dimensions in mm. Kit parts (this sheet): machined positions and outlines +/-0.10; the 3.0 face plate +/-0.13 and the 6.0 entry plates +/-0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height +/-0.10; rebate depth and line +/-0.10; spot-face floors +/-0.10.
Peli: the 1450PF sheet 1453-314-000 rev A states +/-0.76 on one-decimal and +/-0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED).
Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted.
Plate float on the smallest 6-32 in a 4.6 hole: 0.63 (every plate chain carries it).

MeshSat field kit V2, Peli 1450 case set

Face plate (C1): 377.2 x 263.0 x 3.0 on the 1450PF frame, ten 6-32 into Peli's inserts, rebated band

MESH SAT-1357. PROTOTYPE DESIGN: nothing made, bought or fitted.
Session choices under the owner's standing rule of 26 Sep 2026 (SC-07).

Source: tree a8652172 plus the case release's changes (fnd/hc7); inputs by sha256 (first 12):
3bdb88df9826 v2/ecad/tools/panel1450.py
8f25347305e1 v2/cad/face_plate.py
214e915b9855 v2/vendor/peli/1450/frame_seat.out

Generated 2026-09-27 by v2/cad/plate_drawing.py (sheet 1) from the files named left; regenerate with v2/cad/README.md. The editable sources govern; this sheet is a copy.

Sheet 1 of 14

A3, mm
not to scale for measurement:
dimensions govern; use the 1:1 templates for marking